2021 EQUIPMENT CATALOG

PRESSURE WASHERS // FLOOR CARE // DETERGENTS





TABLE OF CONTENTS

Hot Water Pressure Washers		Detergents	31
Electric	3	Floor Care	47
Gas Engine	12	Sweepers	-49
Diesel	15	Extractors	53
All-Electric	16	Vacuums	56
Heating Modules	17	Scrubbers	65
Trailers	18	Floor Machine	82
Cold Water Pressure Washers		Specialty	83
Gas Engine	19	Steam Cleaners	94
Electric	25	Misters	96
Water Recovery	30	Air Blowers	98
		Gum Remover/Window Vac	99

1



Oil-Fired

- 📕 1.7 GPM @ 1200 PSI
- Auto Start/Stop



The 333 Model is a competitively priced, entry-class hot water pressure washer. Innovative upright design ensures good mobility and ergonomics, while its compact size makes it easy to transport both horizontally and vertically. Built-in 3 angle spray nozzle and low pressure chemical application. Very user-friendly with one-switch operation and areas for hose and accessory storage. This model is ETL safety certified and comes equipped with a 33' high-pressure hose, lance, trigger gun and 16' power cord.



MODEL	PART NO.	GPM	PSI	HP	VOLT/ Ph	AMPS	FUEL	BTU/HR	PUMP Model	PORTABILITY	DIMENSIONS (LXWXH)	SHIP WT (LBS)
333	1.064-049.0	1.7	1200	2.3	115/1	12.5	Oil	80,000	Axial	Std	28"x28"x46"	178
OPTIONS										-		
PART NO.	DESCRIP	TION								1		2
2.642-305.0) Gutter cle	eaning la	nce <i>(ima</i>	ige 1 bi	elow)			•				
4.760-245.0) Underbo	dy lance	(image 2	? below)			•				1
2.883-803.0) Power no	ozzle for	underboo	dy lanc	e, 25° spr	ay angle		•			V	
6.390-025.0) 33' high	pressure	hose					•			25	0
6.401-459.0) Plug nipp	ole						•				<u></u>
6.390-028.0) Pipe clea	ning hos	e					•		3		4
4.762-010.0) Wet blast	ting attac	hment (image 3	3 below)			•				
2.638-526.0) Nozzle ki	t for wet	blasting	attachı	ment			•				4
2.640-355.0	FR30Me	surface o	cleaner <i>(i</i>	image 4	4 below)			•			10-11	6 CAZe
2.640-482.0) Nozzle ki	t for surf	ace clear	ner FR				•				
3.637-170.0) Detergen	t injector	r for high	ı pressi	ire			•				
Field Instal	lled 🕨 Factor	ry Install	ed									

LEGEND

- Factory Installed Options must be ordered with the machine. They are installed in factory.
- Field Installed Options can be added to a machine at any time. They are installed by the Dealer.

IDS

HOT WAT	ER PRESSURE V	VASHERS /	ELECTRIC



- 120V
- Stainless Steel Coil Skin
- Flat-Free Tires for Easy Handling

555HE NOW COMES WITH AUTO START/STOP STANDARD!

500 SERIES & 680SS



The 500 Series delivers rugged, yet affordable, cleaning performance for a broad range of applications. The new 555HE is the most efficient hot water pressure washer in our line. It features a technologically advanced heat exchanger that takes water to higher temperatures much faster, saving time and money. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.

Model 555HE Shown with Optional Hose Reel



					VOLT/						DIMENSIONS	SHIP WT	
MODEL	PART NO.	GPM	PSI	HP	PH	AMPS	FUEL	BTU/HR	PUMP MODEL	PORTABILITY	(LXWXH)	(LBS)	
555HE	1.109-137.0	2.2	1300	2	120/1	20	Oil	185,000	Triplex - HE2126S	Std	42"x29"x42"	385	
555SS	1.109-033.0	2.2	1300	2	115/1	20	Oil	214,300	Duplex - HHC165L.1	Std	33"x27"x41.5"	400	
560SS	1.109-034.0	2.1	1500	2.3	115/1	20	Oil	214,300	Triplex - HHC205L.1	Std	33"x26"x44"	405	
680SS	1.109-035.0	3	1000	2	115/1	20	Oil	289,900	Triplex - HF2830S	Std	33"x27"x45.5"	440	

Buy 5 or more 555HEs

or 555SSs and save!

HE = High Efficiency SS = Stainless Steel

BUY MORE. SAVE!

3 = 2% OFF, 5 = 3% OFF, 10 = 5% OFF

OPTIONS	
PART NO.	DESCRIPTION
8.717-764.0	8" Oil-Fired Vent Regulator
8.929-192.0	Float Tank (555HE Only)
8.750-486.0	360° Pivot Reel, 100'
8.903-050.0	100' 3/8" Hose Reel Kit (555SS Only)
8.929-363.0	Exhaust Adapter* (555HE Only)

OPTIONS		
PART NO.	DESCRIPTION	
9.804-624.0	QC Nozzle 3.75, 15° (Yellow) (555HE Only)	•
9.804-625.0	QC Nozzle 3.75, 25° (Green) (555HE Only)	•
9.804-626.0	QC Nozzle 3.75, 40° (White) (555HE Only)	•
8.903-034.0	Float Tank Kit (555SS Only)	•

Field Installed Factory Installed

* NOTE: Must be ordered if the vent regulator [8.717-764.0] is used or the machine is connected to an exhaust stack





- Oil-Fired
- TEFC Motor
- Flat-Free Tires for Easy Handling
- Stainless Steel Coil Skin



The 700 Series offers a nice balance of Hotsy ruggedness and cleaning performance, yet the affordability of an entry-level machine. More powerful yet is the 895SS. The 700 series is ideal for meeting the needs of commercial customers. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.





MODEL	PART NO.	GPM	PSI	HP	VOLT/ PH	AMPS	FUEL	BTU/HR	PUMP Model	DRIVE	PORTA- Bility	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
790SS	1.109-612.0	3.0	2000	4	230/1	20	Oil	289,900	HB4025R	Belt	Std	37"x28"x45.5"	450	
795SS	1.109-039.0	3.5	2000	5	230/1	24	Oil	289,900	HB4025R	Belt	Std	37"x28"x45.5"	455	
795SS-208	1.109-040.0	3.5	2000	5	208/1	27	Oil	289,900	HB4025R	Belt	Std	37"x28"x45.5"	500	
895SS	1.109-077.0	3.5	3000	8.2	230/1	36	Oil	289,900	HM3540R.3	Belt	Std	37"x28"x45.5"	480	

SS = Stainless Steel

OPTIONS		
PART NO.	DESCRIPTION	
8.717-764.0	8" Oil-Fired Vent Regulator	•
8.750-486.0	360° Pivot Reel, 100'	•
8.750-483.0	360° Pivot Reel, 200'	•
8.903-050.0	100' 3/8" Hose Reel Kit (790SS Only)	•
Eiold Installs	A Factory Installed	






Model 895SS

- Oil-Fired
- Big & Beefy, Yet Easy To Maneuver
- Rugged Hotsy Pump with 7-Year Limited Warranty
- Stainless Steel Coil Skin

800 SERIES BELT DRIVE

Rugged design, easy maneuverability and massive cleaning power. Comparable to the cleaning power of Hotsy's heavy-duty stationary units, the big and beefy 800 Series is surprisingly easy to maneuver into place, allowing you to tackle the heaviest of industrial cleaning jobs. The 28" wide wheel base helps with stability, yet is narrow enough to fit easily through doorways. Components are protected by an easy-to-remove cover allowing servicing access. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.

U.S. Design Patent No. 726,382 S

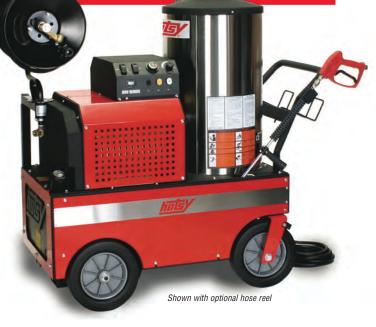







Optional Detergent Bucket Bracket

MODEL	PART NO.	GPM	PSI	HP	MOTOR RPM	VOLT/ PH	AMPS	FUEL	BTU/HR	PUMP Model	PORTABILITY	DIMENSIONS (LXWXH)	SHIP WT (LBS)
821	1.109-120.0	4.0	2300	6.2	3450	208/1	33	Oil	381,000	HM4045R.3	Std	51"x28"x51"	632
842	1.109-121.0	4.0	2000	5	1725	208/3	20	Oil	381,000	HM4030R.3	Std	51"x28"x51"	622
843	1.109-122.0	4.0	2000	5	1725	230/1	29	Oil	381,000	HM4030R.3	Std	51"x28"x51"	622
844	1.109-123.0	4.0	2000	5	1725	230/3	19	Oil	381,000	HM4030R.3	Std	51"x28"x51"	622
845	1.109-124.0	4.0	2000	5	1725	460/3	10	Oil	381,000	HM4030R.3	Std	51"x28"x51"	691
851	1.109-125.0	4.0	3000	8.2	3450	208/1	44	Oil	381,000	HM4045R.3	Std	51"x28"x51"	675
852	1.109-126.0	4.0	3000	7.5	1725	208/3	25	Oil	381,000	HM4030R.3	Std	51"x28"x51"	665
853	1.109-127.0	4.0	3000	7.5	1725	230/1	37	Oil	381,000	HM4030R.3	Std	51"x28"x51"	665
854	1.109-128.0	4.0	3000	7.5	1725	230/3	25	Oil	381,000	HM4030R.3	Std	51"x28"x51"	665
855	1.109-129.0	4.0	3000	7.5	1725	460/3	14	Oil	381,000	HM4030R.3	Std	51"x28"x51"	665
856	1.109-130.0	4.0	3000	8.2	3450	575/3	11	Oil	381,000	HM4045R.3	Std	51"x28"x51"	680
873	1.109-131.0	5.0	3000	10	1725	230/1	42	Oil	404,000	HM4030R.3	Std	51"x28"x51"	670
874	1.109-132.0	5.0	3000	10	1770	230/3	29	Oil	404,000	HM4030R.3	Std	51"x28"x51"	675

OPTIONS		OPTIONS		
PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	
8.930-170.0	Auto Start/Stop Kit*	8.750-486.0	360° Pivot Reel, 100'	•
8.930-172.0	Thermal Shutdown Kit	8.750-483.0	360° Pivot Reel, 200'	•
8.930-171.0	Time Delay Shutdown*	8.923-225.0	Detergent Bucket Bracket	•
8.717-764.0	8" Oil-Fired Vent Regulator			

* Note: Time Delay Shutdown and Auto Start/Stop cannot be combined on the same machine.

Field Installed Factory Installed



- 115V/1PH or 230V/1 PH
- Hotsy Direct-Drive Pump
- Flat-Free Tires for Easy Handling



These hot water washers are heated with either LP or NG, and offer cleaning power up to 1500 PSI. All models are ETL safety certified and feature the Hotsy pump pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



Model 558-Propane (shown with optional Portagear & propane tank)



MODEL	PART NO.	GPM	PSI	HP	VOLT/ PH	AMPS	FUEL	BTU/HR	PUMP MODEL	DRIVE	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
558	1.109-610.0	2.2	1300	2	115/1	18	LP	214,300	Duplex - HHC165L.1	Direct	31.5"x26"x41"	350	

MODEL	PART NO.	GPM	PSI	HP	VOLT/ Ph	AMPS	FUEL	BTU/HR	PUMP MODEL	DRIVE	DIMENSIONS (LXWXH)	SHIP WT (LBS)
771	1.109-611.0	3.0	1500	3	230/1	13	LP	280,000	HF2830S	Direct	32"x27"x45.5"	415
772	1.109-037.0	3.0	1500	3	230/1	13	NG	338,000	HF2830S	Direct	32"x27"x45.5"	415

Portability is optional on these models unless ordered with the portagear kit PN 8.903-049.0.

OPTIONS		
PART NO.	DESCRIPTION	
8.717-728.0	8" LP Gas-Fired Draft Diverter	•
8.903-049.0	Portagear	•
8.717-791.0	Propane Tank, 43 lb. (Model 558 & 771)	•

Field Installed Factory Installed

See PAGE 32 for other configured options thru the SPECIALS DEPARTMENT.

- LP-or Natural Gas-Fired
- Hotsy Belt-Drive Pump
- Remote-Ready

 Smart Relay Control provides control over run time, auto start/stop and shut down functionality

900/1400 SERIES

BELT DRIVE

Hotsy's 900/1400 Series of innovative stationary models are packed with standard features! The most impressive is the programmable smart control automation. Safety is key with a pressure relief valve and locking lid and side panels around the belt and pulleys to keep users safe. These electric-powered washers are available in either LP or Natural Gas fired models. New models have the same footprint as previous generations, so users can feel confident about upgrading. Panels may be easily removed for access to the machine components for servicing. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



U.S. Design Patent No. 740,501 S

MODEL	PART NO.	GPM	PSI	HP	MOTOR RPM	VOLT/ Ph	AMPS	FUEL	BTU/HR	PUMP MODEL	DIMENSIONS (LXWXH)	SHIP WT (LBS)
921P	1.109-948.0	4.0	2300	6.2	3450	208/1	32	LP	364,835	HM4030R.3	47.5"x21"x51"*	700
921N	1.109-691.0	4.0	2300	6.2	3450	208/1	32	NG	364,835	HM4030R.3	47.5"x21"x51"*	700
926P	1.109-949.0	4.0	2000	5	1800	575/3	7	LP	364,835	HM4030R.3	47.5"x21"x51"*	660
926N	1.109-692.0	4.0	2000	5	1800	575/3	7	NG	364,835	HM4030R.3	47.5"x21"x51"*	660
942P	1.109-693.0	4.0	2000	5	1725	208/3	18	LP	360,997	HM4030R.3	47.5"x21"x51"*	590
942N	1.109-694.0	4.0	2000	5	1725	208/3	18	NG	364,835	HM4030R.3	47.5"x21"x51"*	655
943P	1.109-695.0	4.0	2000	5	1725	230/1	25	LP	360,997	HM4030R.3	47.5"x21"x51"*	685
943N	1.109-696.0	4.0	2000	5	1725	230/1	25	NG	364,835	HM4030R.3	47.5"x21"x51"*	685
944P	1.109-697.0	4.0	2000	5	1725	230/3	16	LP	360,997	HM4030R.3	47.5"x21"x51"*	580
944N	1.109-698.0	4.0	2000	5	1725	230/3	16	NG	364,835	HM4030R.3	47.5"x21"x51"*	680
945P	1.109-699.0	4.0	2000	5	1725	460/3	8	LP	360,997	HM4030R.3	47.5"x21"x51"*	585
945N	1.109-700.0	4.0	2000	5	1725	460/3	8	NG	364,835	HM4030R.3	47.5"x21"x51"*	670
					MOTOR	VOLT/				PUMP	DIMENSIONS	SHIP WT
MODEL	PART NO.	GPM	PSI	HP			AMPS	FUEL	BTU/HR			
MODEL 1451P	PART NO. 1.109-950.0	GPM 4.0	PSI 3000	HP 8.2	VRPM 3450	208/1	AMPS 39	FUEL LP	BTU/HR 364,835	MODEL HM4030R.3	(LXWXH) 47.5"x21"x51"*	(LBS) 730
					VRPM	PH				MODEL	(LXWXH)	(LBS)
1451P	1.109-950.0	4.0	3000	8.2	VRPM 3450	PH 208/1	39	LP	364,835	MODEL HM4030R.3	(LXWXH) 47.5"x21"x51"*	(LBS) 730
1451P 1451N	1.109-950.0 1.109-701.0	4.0 4.0	3000 3000	8.2 8.2	VRPM 3450 3450	PH 208/1 208/1	39 39	LP NG	364,835 364,835	MODEL HM4030R.3 HM4030R.3	(LXWXH) 47.5"x21"x51"* 47.5"x21"x51"*	(LBS) 730 730
1451P 1451N 1452P	1.109-950.0 1.109-701.0 1.109-702.0	4.0 4.0 4.0	3000 3000 3000	8.2 8.2 7.5	VRPM 3450 3450 1725	PH 208/1 208/1 208/3	39 39 24	LP NG LP	364,835 364,835 360,997	MODEL HM4030R.3 HM4030R.3 HM4030R.3	(LXWXH) 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"*	(LBS) 730 730 625
1451P 1451N 1452P 1452N	1.109-950.0 1.109-701.0 1.109-702.0 1.109-703.0	4.0 4.0 4.0 4.0	3000 3000 3000 3000	8.2 8.2 7.5 7.5	VRPM 3450 3450 1725 1725	PH 208/1 208/1 208/3 208/3	39 39 24 24	LP NG LP NG	364,835 364,835 360,997 364,835	MODEL HM4030R.3 HM4030R.3 HM4030R.3 HM4030R.3	(LXWXH) 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"*	(LBS) 730 730 625 625
1451P 1451N 1452P 1452N 1453P	1.109-950.0 1.109-701.0 1.109-702.0 1.109-703.0 1.109-704.0	4.0 4.0 4.0 4.0 4.0	3000 3000 3000 3000 3000	8.2 8.2 7.5 7.5 7.5	VRPM 3450 3450 1725 1725 1725	PH 208/1 208/1 208/3 208/3 208/3 230/1	39 39 24 24 34	LP NG LP NG LP	364,835 364,835 360,997 364,835 360,997	MODEL HM4030R.3 HM4030R.3 HM4030R.3 HM4030R.3 HM4030R.3 HM4030R.3 HM4030R.3	(LXWXH) 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"*	(LBS) 730 730 625 625 625 735
1451P 1451N 1452P 1452N 1453P 1453N	1.109-950.0 1.109-701.0 1.109-702.0 1.109-703.0 1.109-704.0 1.109-705.0	4.0 4.0 4.0 4.0 4.0 4.0	3000 3000 3000 3000 3000 3000	8.2 8.2 7.5 7.5 7.5 7.5 7.5	VRPM 3450 3450 1725 1725 1725 1725	PH 208/1 208/1 208/3 208/3 208/3 230/1 230/1	39 39 24 24 34 34	LP NG LP NG LP NG	364,835 364,835 360,997 364,835 360,997 364,835	MODEL HM4030R.3 HM4030R.3 HM4030R.3 HM4030R.3 HM4030R.3 HM4030R.3 HM4030R.3 HM4030R.3 HM4030R.3	(LXWXH) 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"*	(LBS) 730 730 625 625 625 735 735
1451P 1451N 1452P 1452N 1453P 1453N 1453N	1.109-950.0 1.109-701.0 1.109-702.0 1.109-703.0 1.109-704.0 1.109-705.0 1.109-706.0	4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0	3000 3000 3000 3000 3000 3000 3000	8.2 8.2 7.5 7.5 7.5 7.5 7.5	VRPM 3450 3450 1725 1725 1725 1725 1725	PH 208/1 208/3 208/3 208/3 230/1 230/1 230/3	39 39 24 24 34 34 34 24	LP NG LP NG LP NG LP	364,835 364,835 360,997 364,835 360,997 364,835 360,997	MODEL HM4030R.3	(LXWXH) 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"* 47.5"x21"x51"*	(LBS) 730 730 625 625 735 735 735 625
1451P 1451N 1452P 1452N 1453P 1453N 1454P 1454N	1.109-950.0 1.109-701.0 1.109-703.0 1.109-703.0 1.109-704.0 1.109-705.0 1.109-706.0 1.109-707.0	4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0	3000 3000 3000 3000 3000 3000 3000	8.2 8.2 7.5 7.5 7.5 7.5 7.5 7.5	VRPM 3450 3450 1725 1725 1725 1725 1725 1725	PH 208/1 208/3 208/3 208/3 230/1 230/1 230/3 230/3	39 39 24 24 34 34 24 24	LP NG NG LP NG LP NG	364,835 364,835 360,997 364,835 360,997 364,835 360,997 364,835	MODEL HM4030R.3	(LXWXH) 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"*	(LBS) 730 730 625 625 625 735 735 625 700
1451P 1452P 1452P 1452N 1453P 1453N 1454P 1454P 1455P	1.109-950.0 1.109-701.0 1.109-703.0 1.109-703.0 1.109-705.0 1.109-705.0 1.109-707.0 1.109-707.0	4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0	3000 3000 3000 3000 3000 3000 3000 300	8.2 8.2 7.5 7.5 7.5 7.5 7.5 7.5 7.5	VRPM 3450 3450 1725 1725 1725 1725 1725 1725 1725 1725	PH 208/1 208/3 208/3 208/3 230/1 230/1 230/3 230/3	39 39 24 24 34 34 24 24 24 12	LP NG LP NG LP NG LP NG	364,835 364,835 360,997 364,835 360,997 364,835 360,997 364,835 360,997	MODEL HM4030R.3	(LXWXH) 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"*	(LBS) 730 730 625 625 735 735 625 700 630
1451P 1452P 1452P 1452N 1453P 1453N 1454P 1454N 1455P 1455N	1.109-950.0 1.109-701.0 1.109-702.0 1.109-703.0 1.109-704.0 1.109-705.0 1.109-706.0 1.109-707.0 1.109-708.0 1.109-709.0	4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0 4.0	3000 3000 3000 3000 3000 3000 3000 300	8.2 8.2 7.5 7.5 7.5 7.5 7.5 7.5 7.5 7.5 7.5	VRPM 3450 3450 1725 1725 1725 1725 1725 1725 1725 1725	PH 208/1 208/1 208/3 208/3 230/1 230/1 230/3 230/3 230/3 460/3 460/3	39 39 24 24 34 34 24 24 24 12 12	LP NG LP NG LP NG NG LP NG	364,835 364,835 360,997 364,835 360,997 364,835 360,997 364,835 360,997 364,835	MODEL HM4030R.3 HM4030R.3	(LXWXH) 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"* 47.5'x21'x51"*	(LBS) 730 730 625 625 735 735 625 700 630 780

47.5"x21"x51"*

47.5"x21"x51"*

47.5"x21"x51"*

47.5"x21"x51"*

47.5"x21"x51"*

735

740

740

740

740

1473N

1474P

1474N

1475P

1475N

1.109-713.0

1.109-712.0

1.109-714.0

1.109-952.0

1.109-953.0

5.0

5.0

50

5.0

5.0

3000

3000

3000

3000

3000

10

10

10

10

10

1725

1770

1770

1725

1725

230/1

230/3

230/3

208/3

208/3

42

29

29

34

34

NG

LP

NG

LP

NG

390.025

378,617

390,025

378,617

378,617

HM4035R.3

HM4035R.3

HM4035R.3

HM4030R.3

HM4030R.3



900/1400 SERIES OPTIONS







OPTIONS		
PART NO.	DESCRIPTION	
8.916-989.0	Remote Station (image 1 above)	
8.916-988.0	Soap Solenoid and Switch	•
8.717-728.0	8" Natural Gas- or LP Gas-Fired Draft Diverter	•
9.803-452.0	Water Inlet Solenoid	•
8.755-253.0	8" Power Dampener	•
8.749-807.0	Power Dampener Wiring Harness	•

OPTIONS		
PART NO.	DESCRIPTION	
8.924-814.0	R-Con Wireless Remote Kit (1 remote/1 receiver) (image 2 above)	•
8.925-072.0	R-Con Wireless Remote Kit (2 remotes/1 receiver)	
8.924-878.0	Wall Mount Remote Bracket for R-Con (image 3 above)	•
8.756-329.0	Replacement Remote (transmitter only)	•

Field Installed Factory Installed

 Please Note: R-Con Wireless Remote comes from vendor, is custom made to order and is not universal. When ordering, please contact customer service to supply the serial number off the transmitter you have along with the channel number, so we can pass along that information to the vendor.

- Natural Gas, Oil or optional LP-Fired
- Remote-ready
- Hotsy Belt Drive Pump
- Stainless Steel Coil Skin

 Smart Relay Control provides control over run time, auto start/stop and shut down functionality

1800 SERIES BELT DRIVE

The 1800 Series provides stationary cleaning with hot water indoors. The 7 models are electric-powered and natural gas, oil or optional LP gasheated. The coil skin comes standard with stainless steel. The sleek cabinet has removable side and front panels, making it easy for routine scheduled maintenance and service. The Smart Relay allows the washer to be customized to individual needs, and is protected behind the front panel. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.





MODEL	PART NO.	GPM	PSI	HP	VOLT/ Ph	AMPS	FUEL	BTU/HR	PUMP MODEL	DIMENSIONS (LXWXH)	SHIP WT (LBS)
1812SS	1.109-660.0	6.0	2500	10	230/1	42	NG	558,050	HX9536L.2	51"x31"x53.25"	1,020
1830SS	1.109-665.0	6.0	3000	15	230/3	40	0il*	579,776	HX9536L.2	51"x31"x53.25"	1,020
1832SS	1.109-662.0	6.0	3000	15	230/3	38	NG	558,050	HX9536L.2	51"x31"x53.25"	1,020
1832SS-208	1.109-661.0	6.0	3000	15	208/3	41	NG	558,050	HX9536L.2	51"x31"x53.25"	1,020
1833SS	1.109-666.0	6.0	3000	15	460/3	21	0il*	579,776	HX9536L.2	51"x31"x53.25"	1,020
1835SS	1.109-663.0	6.0	3000	15	460/3	19	NG	558,050	HX9536L.2	51"x31"x53.25"	1,020
1836SS	1.109-664.0	6.0	3000	15	575/3	16	NG	558,050	HX9536L.2	51"x31"x53.25"	1,020

b

*Oil-fired models are not supplied with a fuel tank

OPTIONSPART NO.DESCRIPTION8.916-989.0Remote Station (*image 1 below*)8.916-988.0Soap Solenoid and Switch8.749-806.010° Power Dampener8.749-807.0Power Dampener8.749-807.0Power Dampener Wiring Harness9.801-040.010° Natural Gas- or LP Gas-Fired Draft Diverter

OPTIONS		
PART NO.	DESCRIPTION	
9.803-452.0	Water Inlet Solenoid	
8.924-814.0	R-Con Wireless Remote Kit (1 remote /1 receiver) (image 2 below)	•
8.925-072.0	R-Con Wireless Remote Kit (2 remotes/1 receiver)	•
8.924-878.0	Wall Mount Remote Bracket for R-Con (image 3 below)	•
8.756-329.0*	Replacement Remote (transmitter only)	•
8.903-074.0	LP Conversion Kit	•



See PAGE 32 for other configured options thru the SPECIALS DEPARTMENT.

Field Installed Factory Installed

Please Note: R-Con Wireless Remote comes from vendor, is custom
made to order and is not universal. When ordering, please contact
customer service to supply the serial number off the transmitter you
have along with the channel number, so we can pass along that
information to the vendor.

- *Oil, Natural Gas or optional LP-Fired*
- Remote-ready
- Hotsy Belt Drive Pump
- Stainless Steel Coil Skin
- Smart Relay Control provides control over run time, auto start/stop and shut down functionality

5700/5800 SERIES



The 5700 and 5800 Series produces a powerful punch and is ideal for wash bay installations. With its 20 HP motor driving the incomparable Hotsy Triplex Pump and a vertical banded belt, the 5700 and 5800 Series delivers cleaning power up to 9.5 GPM and 3000 PSI. Has a sleek cabinet with removable panels for easy access for maintenance. A removable control panel provides access to the adjustable temperature control and the Smart Relay for secured control of operating positions. Remote ready for wash bay installations. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



MODEL	PART NO.	GPM	PSI	HP	VOLT/ Ph	AMPS	FUEL	BTU/HR	PUMP Model	HOSE (FT)	DIMENSIONS (LXWXH)	SHIP WT (LBS)
5730SS	1.109-658.0	8.0	3000	20	230/3	44	0il*	768,000	HX9536L.2	50	51"x31"x63.4"	1,471
5732SS-208	1.109-654.0	8.0	3000	20	208/3	55	NG	720,450	HX9536L.2	50	51"x31"x63.4"	1,471
5732SS	1.109-655.0	8.0	3000	20	230/3	42	NG	720,450	HX9536L.2	50	51"x31"x63.4"	1,471
5733SS	1.109-659.0	8.0	3000	20	460/3	23	0il*	768,000	HX9536L.2	50	51"x31"x63.4"	1,471
5735SS	1.109-656.0	8.0	3000	20	460/3	21	NG	720,450	HX9536L.2	50	51"x31"x63.4"	1,471
5736SS	1.109-657.0	8.0	3000	20	575/3	16	NG	720,450	HX9536L.2	50	51"x31"x63.4"	1,471
5832SS	1.109-651.0	9.5	2500	20	230/3	42	NG	939,890	HX1036L.2	50	51"x31"x63.4"	1,471
5832SS-208	1.109-650.0	9.5	2500	20	208/3	48	NG	939,890	HX1036L.2	50	51"x31"x63.4"	1,471
5835SS	1.109-652.0	9.5	2500	20	460/3	21	NG	939,890	HX1036L.2	50	51"x31"x63.4"	1,461
5836SS	1.109-653.0	9.5	2500	20	575/3	16	NG	939,890	HX1036L.2	50	51"x31"x63.4"	1,471

OPTIONS

*Oil-fired models are not supplied with a fuel tank

OPTIONS		
PART NO.	DESCRIPTION	
8.753-171.0	12" Power Dampener	•
8.749-807.0	Power Dampener Wiring Harness	•
9.803-452.0	Water Inlet Solenoid	•
8.916-989.0	Remote Station (image 1 below)	•
8.916-988.0	Soap Solenoid and Switch	•
8.717-730.0	12" Natural Gas- or LP Gas-Fired Draft Diverter	•



OFTIONS		
PART NO.	DESCRIPTION	
8.924-814.0	R-Con Wireless Remote Kit (1 remote/1 receiver) (image 2 below)	•
8.925-072.0	R-Con Wireless Remote Kit (2 remotes/1 receiver)	•
8.924-878.0	Wall Mount Remote Bracket for R-Con (image 3 below)	•
8.756-329.0 •	Replacement Remote (transmitter only)	•
8.916-916.0	LP Conversion Kit, 5700	•
8.916-915.0	LP Conversion Kit, 5800	•
Field Installed	Fastary Installed	

Field Installed Factory Installed

Please Note: R-Con Wireless Remote comes from vendor, is custom made to order and is not universal. When ordering, please contact customer service to supply the serial number off the transmitter you have along with the channel number, so we can pass along that information to the vendor.

See PAGE 33 for other configured options thru the SPECIALS DEPARTMENT.



HOT WATER PRESSURE WASHERS / GAS

- Oil-Fired
- 12 Volt DC
- Hotsy Direct-Drive Pump
- Stainless Steel Coil Skin
- 3 Battery-less Models
- 2 Electric-Start Models
- Flat-Free Tires for Easy Handling

GAS ENGINE SERIES

DIRECT DRIVE

The Gas Engine Series consists of the most compact and portable hot water pressure washers on the market. Powered by reliable gasoline engines, all you need is water and you can clean anywhere anytime. The five models offer a broad range of cleaning power, from 2.7 to 4.0 GPM and from 2400 to 3500 PSI. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' highpressure hose, lance, nozzles and trigger gun.



965SS





MODEL	PART NO.	GPM	PSI	ENGINE/ MODEL	CCs	BURNER	BTU/HR	PUMP Model	PORTABILITY	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
871SS*	1.110-014.0	2.7	2400	Honda GX200	196	12V DC	248,500	HP3035G	Std	43"x27"x39"	410	
965SS* *	1.110-015.0	3.0	3000	Honda GX270	270	12V DC	248,500	HP3035G	Std	47"x31"x41"	445	
1065SS* ★	1.110-010.0	3.5	3000	Honda GX340	337	12V DC	309,900	HS3540G.3	Std	47"x31"x45"	495	
1065SSE†*	1.110-011.0	3.5	3000	Honda GX340	337	12V DC	309,900	HS3540G.3	Std	47"x31"x45"	510	
1075SSE†*	1.110-012.0 [1.110-080.0 CA]	4.0	3500	Honda GX390	389	12V DC	309,900	HS4040G.3	Std	47"x31"x45"	520	

871SS

*Battery not required

† 12V battery required, but not supplied E = Electric-start engine

[★] Not available for sale in California. California Dealers please order approved PN 1.110-080.0 to replace PN 1.110-012.0.

HOT WATER PRESSURE WASHERS / GAS

- Oil-Fired
- 12 Volt DC

Hotsy Belt-Drive Pump

2 Electric-Start Models

GAS ENGINE SERIES

BELT DRIVE

The belt drive versions of the Gas Engine Series provide versatility with the roll cage design. Designed to fit the needs of the end-user, this versatile hot water washer converts easily to a skid unit, portable with wheels or a wheel/caster kit, or can be mounted on a trailer. Powered by reliable gasoline engines, the three models offer a broad range of cleaning power, from 3.0 to 4.6 GPM and from 3000 to 3500 PSI. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



						965B (shown with opti flat-free tires)		DBE (shown wit steel coil wrap	h optional stainless and skid rails)
PSI	ENGINE MODEL	CCs	BURNER	BTU/HR	PUMP Model	PORTABILITY	DIMENSIONS (LXWXH)	SHIP WT (LBS)	

1075BE

(shown with optional

caster wheel kit)

MODEL	PART NO.	GPM	PSI	MODEL	CCs	BURNER	BTU/HR	MODEL	PORTABILITY	(LXWXH)	(LBS)	
965B* ★	1.110-565.0	3.0	3000	Honda GX270	270	12V DC	248,500	HB3030L.1	Optional	42"x27.5"x39"	590	
1075BE†★	1.110-566.0 [1.110-082.0 CA]	4.0	3500	Honda GX390	389	12V DC	385,800	HM4035L.3	Optional	42"x27.5"x39"	625	
1080BE†	1.110-567.0	4.6	3500	Vanguard 18	570	12V DC	385,800	HM4035L.3	Optional	42"x27.5"x39"	665	
* Battery not r	required		E =	Electric-start engin	е							

† 12V battery required, but not supplied

B = Belt Drive

OPTIONS		
PART NO.	DESCRIPTION	
8.916-172.0	Float Tank Kit (includes high pressure detergent kit), 1075BE & 1080BE models	•
8.916-173.0	Float Tank Kit (includes high pressure detergent kit) 965B model	•
8.931-259.0	Skid Rail Kit - adds 3.875" to height	•
8.931-260.0	Caster Kit - 2 casters / 2 wheels - adds 7.5" to height	•
8.931-261.0	Flat-free Tire Kit with Handle Bar - adds 10" to width, 6" to height	•
8.916-175.0	High Pressure Detergent Kit, 1075BE & 1080BE models (to be used with a remote water tank)	•
8.916-174.0	High Pressure Detergent Kit, 965B models (to be used with a remote water tank)	•
8.915-274.0	Stainless Steel Coil Wrap	•

Field Installed Factory Installed

★ Not available for sale in California. California Dealers please order approved PN 1.110-082.0 to replace PN 1.110-566.0.

See PAGE 34 for other configured options thru the SPECIALS DEPARTMENT.

בלקקו

//

- Gas/Diesel-Powered
- Oil-Fired
- Hotsy Belt-drive Pump
- Stainless Steel Coil Skin
 - Electric Start

1200 SERIES Belt DRIVE

The 1200 Series delivers some serious on-site, hot water cleaning capability of up to 6 GPM and 4000 PSI. Rugged gasoline engines all have electric start. Five models come with a 2400W generator. The self-contained cleaning units are built to hold up under the toughest of conditions. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



MODEL	PART NO.	GPM	PSI	ENGINE MODEL	FUEL	CCs	BURNER	BTU/HR	PUMP MODEL	DIMENSIONS (LXWXH)	SHIP WT (LBS)
1260SS	1.110-533.0	4.7	3500	Briggs VAN 18	Gas	570	12V DC	414,318	HM4035R.2	45"x33"x52"	745
1260SSG*	1.110-535.0	4.7	3500	Briggs VAN 18	Gas	570	120V AC	414,318	HM4035R.2	45"x33"x52"	830
1270SS	1.110-557.0	4.5	4000	Honda GX630	Gas	688	12V DC	414,318	HX5843R.2	45"x33"x52"	855
1270SSG*	1.110-536.0	4.5	4000	Honda GX630	Gas	688	120V AC	414,318	HX5843R.2	45"x33"x52"	870
1270SSG-PR*	1.110-079.0	4.5	4000	Honda GX630	Gas	688	12V DC	414,318	HX5843R.2	45"x33"x52"	870
1280SS	1.110-558.0	5.1	3500	Honda GX630	Gas	688	12V DC	414,318	HX8043R.2	45"x33"x52"	760
1280SSG*	1.110-537.0	5.1	3500	Honda GX630	Gas	688	120V AC	414,318	HX8043R.2	45"x33"x52"	750
1290SS	1.110-538.0	5.6	3000	Honda GX630	Gas	688	12V DC	456,344	HX8043R.2	45"x33"x52"	744
1290SSG*	1.110-539.0	5.6	3000	Honda GX630	Gas	688	120V AC	456,344	HX8043R.2	45"x33"x52"	905
1291SS	1.110-075.0	8.0	3000	Honda GX690	Gas	688	12V DC	407,826	HX9536R	45"x33"x52"	760
1291SSG*	1.110-076.0	8.0	3000	Honda GX690	Gas	688	120V AC	407,826	HX9536R	45"x33"x52"	920
1265SSD	1.110-073.0	4.7	3500	Kubota Z602-E4B	Diesel	599	12V DC	414,318	HM4035	45"x33"x52"	795
1265SSDS**	1.110-074.0	4.7	3500	Kubota Z602-E4B	Diesel	599	12V DC	414,318	HM4035	45"x33"x52"	795

* Models include a 2400W generator


**Models include stainless frame

12V battery is required for all models, but is not supplied

OPTIONS

PART NO.	DESCRIPTION
8 903-025 0	Portagear Kit (all models)

Field Installed Factory Installed



HOT WATER PRESSURE WASHERS / GAS/DIESEL ENGINE



٩	<u>te</u> y		
-			
			N. T
Ś		=	ð
-0		Ø	

1270SS (shown with optional Portagear Kit)

HOT WATER PRESSURE WASHERS / DIESEL



- Diesel-Powered
 Diesel-Fired
- ____ ■ Ei
- Hotsy Belt-drive Pump

Stainless Steel Coil Skin
 Electric Start

HSS & HSDS SUPERSKID SERIES BELT DRIVE

The Super Skid HSS Series is by far, the largest and most powerful of Hotsy's hot water pressure washers. The Super Duty HSDS models feature a Hawk pump with lower RPM for long lasting durability; there's literally nothing else on the market as robust, big & powerful. HSS models come standard with the reliable Hotsy triplex belt-driven high-pressure pump. Triple banded belt for more efficient power transmission. Models are powered by a 16 & 24 HP Kubota engines with electric start and all feature a 3/4-inch foil-backed insulated Schedule 80 heating coil with stainless steel skin and 5-year warranty. Two fuel tanks for longer operation, a high-efficiency Wayne burner and optional dual gun kit allows two users at one time. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.





MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	BURNER	BTU/HR	PUMP Model	HOSE	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
HSS-503069E	1.110-604.0	5.0	3000	Kubota Z602-E4B	599	12V DC	465,000	HX5843R.2	50'-3/8"	73"x37"x64"	1305	
HSS-653569E	1.110-605.0	6.5	3500	Kubota D1105-E4B	1123	12V DC	565,000	HX8043R.2	50'-3/8"	73"x37"x64"	1710	
HSS-803069E	1.110-606.0	8.0	3000	Kubota D1105-E4B	1123	12V DC	635,000	HX9536.2	50'-1/2"	73"x37"x64"	1715	
HSS-952569E	1.110-607.0	9.5	2500	Kubota D1105-E4B	1123	12V DC	780,000	HX1036R.2	50'-1/2"	73"x37"x64"	1715	

All models are Electric Start. 12V battery is required for all models, but is not supplied.

SUPER DUTY MODELS:

OPTIONS Part no.

8.923-164.0

8.923-125.0

8.923-124.0

MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	BURNER	BTU/HR	PUMP Model	HOSE	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
HSDS-503069E	1.110-616.0	5.0	3000	Kubota Z602-E4B	599	12V DC	465,000	HHP2750R	50'-3/8"	73"x37"x64"	1610	
HSDS-653569E	1.110-617.0	6.5	3500	Kubota D1105-E4B	1123	12V DC	565,000	HHP3650R	50'-3/8"	73"x37"x64"	2005	
HSDS-803069E	1.110-618.0	8.0	3000	Kubota D1105-E4B	1123	12V DC	635,000	HFR40FR	50'-1/2"	73"x37"x64"	2015	
HSDS-952569E	1.110-619.0	9.5	2500	Kubota D1105-E4B	1123	12V DC	780,000	HFR60FR	50'-1/2"	73"x37"x64"	2020	

All models are Electric Start. 12V battery is required for all models, but is not supplied.

Dual Gun Kit - includes necessary fittings, extra hose gun and wand

Steam Kit - includes necessary fittings and panel mount control valve

•	
•	
•	1 million and 1

Pump size comparison:

The HFR and HHP pumps from Leuco used in the Super Duty models dwarf the standard HX.

Field Installed Factory Installed

DESCRIPTION

See PAGE 35 for other configured options thru the SPECIALS DEPARTMENT.

Effective January 1, 2021. Prices, specifications and product descriptions subject to change without notice.

Float Tank Kit - includes float tank, necessary fittings and panel mount detergent metering valve



- All-Electric
- Hotsy Belt-drive Pump
- Auto Start/Stop
- HWE SERIES ALL-ELECTRIC BELT DRIVE

The HWE Series is powered and heated by electricity, making it ideal for indoor use. It's a quiet machine with no fumes, making it ideal for food service and inplant cleaning. Water is heated in a stainless steel heating coil, immersed in a tank of water solution, allowing for instant hot water once you pull the trigger. The heating elements do not come in contact with the pressurized water, which results in less maintenance and minimizes scale build up. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, insulated variable pressure wand, nozzles and trigger gun.





MODEL	PART NO.	GPM	PSI	HP	MOTOR	AMPS	VOLT/ Ph	KvA HOUR	BTU/HR	PUMP MODEL	DIMENSIONS (LXWXH)	SHIP WT (LBS)
HWE-402009C	1.109-646.0	4.0	2000	6.2	Baldor	55	460/3	40.5	138,308	HM4030R.3	34"x25"x52"	620
HWE-403009C	1.109-647.0	3.5	3000	7.5	WEG	59	460/3	40.5	138,308	HM4030R.3	34"x25"x52"	640
HWE-402009F	1.109-958.0	3.5	2000	5	Baldor	46	575/3	40.5	138,308	HM4030R.3	34"x25"x52"	620
HWE-403009F	1.109-959.0	3.5	3000	7.5	Baldor	49	575/3	40.5	138,308	HM4030R.3	34"x25"x52"	640

n	PT	11	11	10
υ	г	ц	זו	10

PART NO.	DESCRIPTION	
8.903-042.0	Stainless Steel Washer Wrap 1700 Series*	
8.925-520.0	Option, Time Delay Shut Down*	

Field Installed Factory Installed

See PAGE 33 for stainless steel and other configured options thru the Specials Dept. 575V/3Ph models only available as base unit through standard production. If adding options, go through SPECIALS DEPARTMENT.

HEATING MODULES

Diesel

- Kerosene
- Home Heating Oil
- Natural Gas
- LP Gas (optional)

9400 SERIES

The 9400 Series heating modules offer the flexibility to "convert" a cold water pressure washer into a hot water unit. By attaching the heating module to a cold water pressure washer the pressurized water is now heated to produce all the benefits of hot water cleaning. The four models use fuel oil, diesel or natural gas to heat the water using Hotsy's high-efficiency, vertical heating coil. All models are ETL safety certified and come equipped with a flow switch to control the burner.



Model 9462



[]]]

Model 9452



MODEL	PART NO.	PSI (MAX)	GPM (MAX)	GPM (MIN)	VOLT/PH	BTU/HOUR	AMP	FUEL	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
9450	1.103-905.0	3200	10	6	115/1	700,000	8	Oil-Fired	32.5"x25"x50.5"	525	
9452	1.103-906.0	3200	10	6	115/1	540,000	1	Natural-Gas-Fired	32.5"x25"x50.5"	500	
9460	1.103-907.0	3200	10	6	115/1	920,000	8	Oil-Fired	40.5"x32"x65"	920	
9462	1.103-908.0	3200	10	6	115/1	920,000	1	Natural-Gas-Fired	40.5"x32"x65"	935	

OPTIONS		
PART NO.	DESCRIPTION	
9.801-040.0	10" Natural Gas-Fired Draft Diverter for Model 9452	
8.717-730.0	12" Natural Gas-Fired Draft Diverter for Model 9462	
8.749-806.0	10" Power Dampener	
8.753-171.0	12" Power Dampener	
8.749-807.0	Power Dampener Wiring Harness	
8.704-659.0	Hotsy Logo Label, 5" x 11"	
8.903-076.0	Natural-Gas to LP Conversion for Model 9452	•
8.903-075.0	Natural-Gas to LP Conversion for Model 9462	

Field Installed Factory Installed

See PAGE 39 for other configured options thru the SPECIALS DEPARTMENT.

- 200 Gallon Water Tank
- Single axle rated to 3500 pounds
- Swing Away Hinged Tongue
- Electric Brakes

RAIL BLAZER Railer

The Trail Blazer is Hotsy's affordable trailer solution that provides mobile cleaning anywhere. Axle assembly with leaf-spring suspension is rated at 3,500 lbs. The heavy duty-chassis features a swing-away hinge with swivel jack tongue assembly. The 200 gallon water tank features a float valve and 7-inch access port. 15-inch white spoke wheel assembly. Axle with electric brakes and break-away kit is the standard configuration.



Shown with 1080BE and optional accessories

Select a trailer and add one of these pressure washer models:

- **965B** 1075BE
- 1080BE 1200 Series

MODEL	PART N	IO. DIMENS	DIMENSIONS (LXWH)		SHIPPING WEIGHT (LBS)					
TRB-3500	1.103-818.0		S"x66"x52"	543	1043 (does not include pressure washer)			* (trailer only)		
GVWR	WATER TANK CAPACITY	GAWR	WHEELS		JACK	JACK Capacity	BALL COUPLER	SAFETY Chains	LIGHTING	
3500 lbs	200 gal	Single 3500 lbs	15" White Spoke Whee ST205/75D15 Tires		vel Wheel w/ aster Foot	1000 lbs	2"	Dual 5/16"	Recessed Lights are DOT Approved	

Flat \$600 freight charge applies to all trailer purchases (trailer only as well as a configured trailers).

OPTIONS		OPTIONS	
PART NO.	DESCRIPTION	PART NO.	DESCRIPTIO
8.917-398.0	Brakes, Hydraulic	8.917-559.0	Rock Guard I
8.917-554.0	High Pressure Hose Reel	8.917-558.0	Saddle Box K
8.917-555.0	Low Pressure Hose Reel	8.917-560.0	Utility Rack k
8.917-556.0	Saddle Box Kit, set of two	Field Installed	Factory I
8.917-557.0	Rock Guard Kit		
8.917-583.0	Chrome Wheel Rims		
8.924-493.0	2-5/16" Ball Hitch Coupler (adjustable height)		
8.924-368.0	3" Lunette Eye Coupler		
8.904-051.0	Battery Installed on Pressure Washer		
8.917-290.0	Assembly Mounting (for 1200 Series)*		
8.917-291.0	Assembly Mounting (for 965B, 1075BE, 1080BE Models)*		

OPTIONS		
PART NO.	DESCRIPTION	
8.917-559.0	Rock Guard Kit	
8.917-558.0	Saddle Box Kit - single box only	
8.917-560.0	Utility Rack Kit (150 lb. load capacity)	

' Installed

See PAGE 40-41 for other configured options thru the SPECIALS DEPARTMENT.

*Required when purchasing a pressure washer and trailer package;

NOT available for trailer only purchases.

COLD WATER PRESSURE WASHERS / GAS ENGINE

- Hotsy Belt-drive Pump
- Reliable Honda GX engine with three-year warranty
- Modular design change from stationary unit to mobile unit with optional wheel kit
- Complete stainless-steel frame

 Flat-free tires on optional wheel kit

- Machine will fit up
- to a 100' hose reel ETL certified to UL-1776 safety standards



Hotsy's High Flow Series features up to an 8.0 GPM flow rate and 3500 PSI to blast through the toughest jobs on farms and construction sites, perfect for waste and debris removal. Our rugged and economical cold water pressure washer features a high-quality triplex pump and is equipped with a Honda engine for quiet, reliable performance, and a corrosion resistant, stainless steel frame. Three gas models allow you to find the right machine for your needs and the flat-free tires allow for easy maneuverability. The High Flow Series comes as a skid for mounting in a vehicle. There is an optional wheel kit if mobility is needed. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.





MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	PUMP MODEL	HOSE (FT)	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
HHD 5/30 G	1.107-377.0	5.0	3000	Honda GX630	688	6036R	50'	50" X 40" X 58"	426	
HHD 6/30 G	1.107-378.0	6.0	3000	Honda GX630	688	6036R	50'	50" X 40" X 58"	426	
HHD 8/35 G	1.107-379.0	8.0	3500	Honda GX690	688	8043R	50'	50" X 40" X 58"	443	

5/30 G shown with optional flat-free tire cart kit and optional 100' capacity hose reel

OPTIONS		
PART NO.	DESCRIPTION	
8.929-069.0	Flat-Free Cart Kit	•
8.750-478.0	100' Capacity Hose Reel	•
8.750-247.0	Trigger Gun, model M407	•
8.925-132.0	Hose, 3/8" X 50' 2W 6000 PSI SW/SO/CPL (5/30 & 6/30)	
8.925-134.0	Hose, 1/2" X 50' 2W 5000PSI SW/SO/CPL (8/35)	•
9.802-216.0	Injector Chem, non adjustable, 3-5 GPM (5/30)	•
8.757-724.0	Injector Chem, non adjustable, 5-9 GPM (6/30 & 8/35)	•
8.925-229.0	Legacy, 100' x 3/8" ID, 6000 PSI, 2-wire, smooth cover, black high pressure hose	•

Field Installed Factory Installed

All Electric Start battery not included.

ריוד

h

- Honda, Vanguard or new Kohler diesel engine
- Small & large roll cage design
- Totally enclosed belt guard
- VRT3 unloader

- Flat-free tires for easy handling
 Hotsy Belt-drive Pump
- **BD** SERIES & HHD DIESEL

BELT DRIVE

The BD Series is the most rugged cold water pressure washer on the market with its all-steel frame and cage, Hotsy belt-drive, triplex pump and cleaning power of up to 5000 PSI. Four gas models make up what is Hotsy's most durable cold water line-up ever. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, trigger gun, nozzles and chemical injector.



BD Series shown in large cage (4-wheel) version. Small cage 2-wheel version also available.

Diesel model uses the High Flow frame and comes as a skid, as shown





MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	PUMP MODEL	FRAME	NO. WHEELS	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
BD-373539*	1.107-021.0	3.7	3500	Honda GX390	389	HM4035R.3	Small Cage	2	42"x26"x30"	275	
BD-404029	1.107-022.0	4.0	4000	Vanguard 16	479	HX5843R.2	Large Cage	4	46"x30"x36"	360	
BD-405039E*	1.107-023.0	4.0	5000	Honda GX630	688	HX5450R	Large Cage	4	46"x30"x36"	417	
BD-455039E*	1.107-024.0	4.5	5000	Honda GX690	688	HX5450R	Large Cage	4	46"x30"x36"	430	
HHD 3.4/30 D	1.107-382.0	3.4	3000	Kohler KD440	442	HM3540R	Stainless Steel	4	50"x40"x50"	155	

*E = Electric Start (battery not included)

OPTIONS		
PART NO.	DESCRIPTION	
8.904-109.0	E-Zee Hose Reel Kit*100' (Small Cage)	
8.904-110.0	E-Zee Hose Reel Kit*100' (Large Cage)	
8.904-113.0	5000 PSI Hose Reel Kit,* (Large Cage)	•
8.904-115.0	5000 PSI Dual Hose Reel Kit,*† (large cage)	
8.929-069.0	Flat-Free Cart Kit (HHD Model)	•
8.750-478.0	100' Capacity Hose Reel (HHD Model)	

*Includes hose reel and mounting hardware †Includes garden hose reel and high-pressure hose reel

Field Installed Factory Installed

* - Not Available for sale in California; there is no replacement model.

See PAGE 38 for other configured options thru the SPECIALS DEPARTMENT.

COLD WATER PRESSURE WASHERS / GAS ENGINE



Honda engines

- Totally enclosed belt guard
- Flat-free tires for easy handling
- Hotsy Belt-drive Pump



The BX Series is similarly rugged to the BD Series, but more compact. Powered by Honda engines, the BX series delivers cleaning power up to 3500 PSI and an all-steel frame protected by a durable powder coat finish. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



Shown with optional hose reel & mounting kit



MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	START	PUMP MODEL	FRAME	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
BX-282039	1.107-026.0	2.8	2000	Honda GX160	163	Recoil	HB3030R	Small Chassis	37"x21"x24"	152	
BX-373539★	1.107-028.0 [1.107-433.0 CA]	3.7	3500	Honda GX390	389	Recoil	HM4035R.3	Large Chassis	45"x26"x24"	240	

OPTIONS		
PART NO.	DESCRIPTION	
8.929-062.0	Detergent Injector (up to 3 GPM)	
8.756-797.0	Chemical Injector, Non-Adjustable 0.083 (2.1MM)	
8.723-636.0	Detergent nozzle	
8.904-103.0	EZ Hose Reel Kit 100' (incl. reel & mounting hardware)	•

Field Installed Factory Installed

★ Not available for sale in California. California Dealers please order approved PN 1.107-433.0 to replace PN 1.107-028.0.




Honda GX engines

- Steel frame
- **1**0"tubed pneumatic tires for easy handling
- Hotsy Direct-drive Pump

DB SERIES

DIRECT DRIVE

The DB Series is the most compact, affordable alternative in the cold water line featuring a direct-drive triplex pump. All models are powered by reliable Honda engines. Lightweight design and tubed pneumatic tires make for easy maneuvering. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, trigger gun, nozzles and chemical injector.

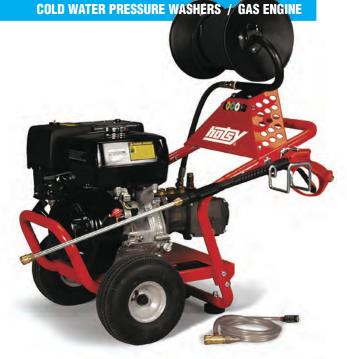

Shown with optional hose reel & mounting kit



MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	PUMP MODEL	HOSE (FT)	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
DB-232439	1.107-031.0	2.3	2400	Honda GX160	163	HP2535G	50	35"x21"x24"	140	
DB-252739	1.107-032.0	2.5	2700	Honda GX200	196	HP2535G	50	35"x21"x24"	145	
DB-303039 ★	1.107-033.0	3.0	3000	Honda GX270	270	HP3035G1	50	35"x21"x24"	175	
DB-354039 ★	1.107-222.0	3.5	4000	Honda GX390	390	HS354093	50	35"x21"x24"	179	
DB-383539 ★	1.107-034.0	3.8	3500	Honda GX390	390	HS4040G3	50	35"x21"x24"	179	

OPTIONS

PART NO. DESCRIPTION 8.904-105.0 EZ Hose Reel Kit 100' (includes reel & mounting hardware)

Field Installed Factory Installed

* Not available for sale in California; there is no replacement model.

COLD WATER PRESSURE WASHERS / GAS ENGINE



Honda engine

- Weighs 80 lbs
 Convenient carrying handle
- Hotsy Direct-drive pump
 Cleaning power up to 2400 PSI
- **HC** SERIES HANDHELD



The HC Series is the handheld model of the gasoline-powered line, delivering cleaning capability up to 2400 PSI. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.





MODEL	PART NO.	GPM	PSI	ENGINE MODEL	CCs	PUMP Model	HOSE (FT)	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
HC-232439	1.107-036.0	2.3	2400	Honda GX160	163	HP2535G	25	20"x16"x17"	95	

COLD WATER PRESSURE WASHERS / GAS ENGINE

- Honda GX engines
- Modular design converts to skid
- VRT3 unloader with bypass loop
- Flat-free tires for easy handling
- Downstream chemical injection


6

- Aluminum Frame
- ETL certified to UL-1776 safety standards



The HD Series are Hotsy's modular cold water pressure washers with corrosion resistant aluminum frame. Wheels can be removed allowing for easy trailer mounting. Models are available in belt or direct drive and powered by Honda GX engines. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



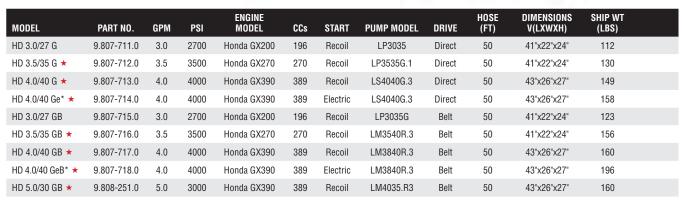

*Battery included on electric start models.

★ Not available for sale in California. Please use the following approved PN replacements: For 9.807-712.0 use 1.107-421.0 (CA) For 9.807-713.0 use 1.107-429.0 (CA) For 9.807-714.0 use 1.107-435.0 (CA) For 9.807-716.0 use 1.107-422.0 (CA) For 9.807-717.0 use 1.107-430.0 (CA) For 9.807-718.0 use 1.107-434.0 (CA)

Shown with ontional hose reel

bracket kit installed

OPTIONS		
PART NO.	DESCRIPTION	
9.807-750.0	37.5" Handle	•
9.807-751.0	Handle with Hose Reel (Mild Steel Anthracite Handle)	•
9.807-752.0	Hose Hook	•
9.807-753.0	Wand Holder	•

OPTIONS		
PART NO.	DESCRIPTION	
8.929-509.0	Hose Reel Bracket Kit (Belt-Drive)	•
8.929-511.0	Hose Reel Bracket Kit (Direct-Drive)	•
9.807-754.0	Skid Mount Feet (set of 4)	•
Field Installe	d Factory Installed	

SKID OPTIONS

Dealer assembly required. Pressure washer sold separately.

The perfect accompaniment to Hotsy HD Series pressure washers – these mild steel skids offer two configurations: skid with a 50 gallon water tank and 100' hose reel OR skid with two 100' hose reels. The HD Skids fit within a standard UTV / ATV bed when ordering the direct drive models as depicted below. *NOTE: Belt drive models extend beyond the frame and are not recommended. Skid feet included.*



DESCRIPTION	PART NO.	FRAME Material	WATER TANK	HOSE REEL	COMPATABLE PRESSURE WASHER (SOLD SEPARATELY)	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
One 100' Hose Reel & 50 gallon Water Tank	9.807-835.0	Mild Steel	50 gallon	1	HD 3.0/27 G 9.807-711.0 HD 3.5/35 G 9.807-712.0 HD 4.0/40 G 9.807-713.0	40"x48"x35"	180 (excluding pressure washer)	
Two 100' Hose Reels	9.807-840.0	Mild Steel	Not Included	2	HD 3.0/27 G 9.807-711.0 HD 3.5/35 G 9.807-712.0 HD 4.0/40 G 9.807-713.0	40"x48"x35"	172 (excluding pressure washer)	

- Smart Relay Control provides control over run time, auto start/stop and shut down functionality
- Remote-ready
- Hotsy Belt-drive Pump



The CWC Series is a completely self-contained, stationary, electric-powered, cold water washer with programmable smart control, upstream detergent injector and ETL safety certification. Remote ready for wash bays. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.



||||



MODEL	PART NO.	GPM	PSI	HP	MOTOR RPM	VOLT/PH	AMP	PUMP MODEL	HOSE (FT)	SHIP WT (LBS)	
CWC-53	1.106-572.0	4.0	3000	7.5	1725	230/1	36	HM4030R.3	50	340	
CWC-54	1.106-573.0	4.0	3000	7.5	1725	230/3	23	HM4030R.3	50	340	
CWC-55	1.106-574.0	4.0	3000	7.5	1725	460/3	11	HM4030R.3	50	340	
CWC-56	1.106-575.0	4.0	3000	7.5	1770	575/3	9	HM4030R.3	50	340	
CWC-63	1.106-576.0	5.0	2000	7.5	1725	230/1	36	HM4035R.3	50	340	
CWC-64	1.106-577.0	5.0	2000	7.5	1725	230/3	18	HM4035R.3	50	340	
CWC-65	1.106-578.0	5.0	2000	7.5	1725	460/3	9	HM4035R.3	50	340	
CWC-66	1.106-579.0	5.0	2000	7.5	1770	575/3	8	HM4035R.3	50	340	

OPTIONS		
PART NO.	DESCRIPTION	
8.916-989.0	Remote Station (image 1 below)	•
8.924-814.0	R-Con Wireless Remote Kit (1 remotes/1 receiver) (image 2 below)	•
8.925-072.0	R-Con Wireless Remote Kit (2 remotes/1 receiver)	•

Field Installed Factory Installed

OPTIONS		
PART NO.	DESCRIPTION	
8.924-878.0	Wall Mount Remote Bracket for R-Con (image 3 below)	•
8.756-329.0*	Replacement Remote (transmitter only)	•
8.916-988.0	Soap Solenoid and Switch	•

 Please Note: R-Con Wireless Remote comes from vendor, is custom made to order and is not universal. When ordering, please contact customer service to supply the serial number off the transmitter you have along with the channel number, so we can pass along that information to the vendor.



See PAGE 37 for stainless steel and other configured options thru the SPECIALS DEPARTMENT.



- Electric motor, 2-10 HP
- Downstream detergent injector
- Hotsy Belt-drive Pump
- Insulated SS variable pressure wand
- Option-ready for Time Delay Shutdown
- or Auto Start/Stop

1700 SERIES

BELT DRIVE

The 1700 Series offers the most reliable, stationary, electric-powered, cold water pressure washer. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, insulated variable pressure wand, trigger gun, nozzles and chemical injector.



Model 1710 shown with optional wheel kit & chemical rack (PN 9.801-031.0). Note: this is not the short stand.

COLD WATER PRESSURE WASHERS / ELECTRIC

1700 Series shown with optional hose reel kit, (PN 8.903-039.0), Tall Floor Stand (PN 9.801-034.0), caster wheel kit (PN 9.801-035.0) and stainless steel base and cover (PN 8.903-042.0).



Mar 1

Shown with optional stainless steel cabinet

@

MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMPS	PUMP MODEL	PORTABILITY	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
1710	1.106-511.0	2.8	1000	2	120/1	20	HB3030R	Optional	31"x21"x16"	200	
1720	1.106-512.0	3.9	2000	6	230/1	28	HM4030R.3	Optional	31"x21"x16"	275	
1722	1.106-513.0	3.9	2000	6	208/1	30	HM4030R.3	Optional	31"x21"x16"	250	
1723	1.106-514.0	3.9	2000	6	208/3	16	HM4030R.3	Optional	31"x21"x16"	250	
1724	1.106-515.0	3.9	2000	6	230/3	16.8	HM4030R.3	Optional	31"x21"x16"	250	
1725	1.106-516.0	3.9	2000	6	460/3	8	HM4030R.3	Optional	31"x21"x16"	250	
1726	1.106-590.0	3.9	2000	7.5	575/3	6.6	HM4030R.3	Optional	31"x21"x16"	275	
1743	1.106-529.0	4.8	3000	10	208/3	31.3	HM4035R.3	Optional	31"x21"x16"	302	
1744	1.106-530.0	4.8	3000	10	230/3	26.8	HM4035R.3	Optional	31"x21"x16"	300	
1745	1.106-531.0	4.8	3000	10	460/3	15	HM4035R.3	Optional	31"x21"x16"	315	
1746	1.106-591.0	4.8	3000	10	575/3	9.6	HM4035R.3	Optional	31"x21"x16"	290	
1753	1.106-534.0	5.6	2500	10	208/3	31.3	HX9536R.2	Optional	31"x21"x16"	320	
1754	1.106-535.0	5.6	2500	10	230/3	26.8	HX9536R.2	Optional	31"x21"x16"	310	
1755	1.106-536.0	5.6	2500	10	460/3	13.5	HX9536R.2	Optional	31"x21"x16"	310	
1756	1.106-592.0	5.6	2500	10	575/3	10.3	HX9536R.2	Optional	31"x21"x16"	310	

OPTIONS			OPTIONS		
PART NO.	DESCRIPTION		PART NO.	DESCRIPTION	
9.801-031.0	Kit, 1700 Wheel w/Chemical Rack (black)		8.903-041.0	Time Delay Shut Down 3ph	•
8.904-527.0	Kit, 1700 Wheel w/Chemical Rack (stainless steel)			(1723, 1724, 1725, 1726, 1743, 1744, 1745, 1746)	
9.801-033.0	Kit, 1700 Wall Mount		8.903-044.0	Time Delay Shut Down 3ph (1753, 1754, 1755, 1756)	•
9.801-034.0	Kit, 1700 Floor Stand, Tall (20 3/4"W x 29"D x 36"H)	•	8.903-045.0	Time Delay Shut Down 120v 1ph (1710)	•
9.801-035.0	Kit, Caster Wheels for 1700 Floor Stand		8.929-374.0	Time Delay Shutdown 208/230v 1ph (1720, 1722)	•
8.903-039.0	Kit, Hose Reel w/Bracket for 1700 Stand & Wall Mount Kits	•	8.903-047.0	Auto Start/Stop 3ph (1723, 1724, 1725, 1726, 1743, 1744, 1745, 1746)	•
8.903-040.0	Kit, 1700 Floor Stand, Short (20 3/4"W x 29"D x 24"H)	•	8.903-048.0	Auto Start/Stop 3ph (1753, 1754, 1755, 1756)	•
8.903-043.0	Kit, 1700 Wall Mount, Stainless Steel		8.929-376.0	Auto Start/Stop 120v 1ph (1710)	•
8.903-617.0	Kit, 1700 Floor Stand, Tall, Stainless Steel	•	8.929-377.0	Auto Start/Stop 208/230v 1ph (1720, 1722)	•
8.903-521.0	Kit, Hose Reel for Wheel Kit, 100 ft. (excludes hose)		8.923-421.0	Stainless Steel Base & Cover for Model 1710	•
Field Installe	ed Factory Installed		8.903-042.0	Stainless Steel Base & Cover for Models 172x, 174x, 175x	•

Field Installed Factory Installed

See PAGE 36 for other configured options thru the SPECIALS DEPARTMENT.

*Time Delay Shutdown and Auto Start/Stop cannot be combined on the same machine



- Hotsy Belt-drive Pump
- Totally enclosed belt guard
- 12' cord length
- Flat-free tires for easy handling



The BDE Series is the electric equivalent of the BD Series. Hotsy belt-drive, triplex pump and cleaning power of 5000 PSI. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, trigger gun, nozzles and chemical injector.





MODEL	PART NO.	GPM	PSI	HP	MOTOR RPM	VOLT/ PH	AMPS	PUMP Model	PUMP RPM	HOSE (FT)	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
BDE-505009B	1.107-085.0	5.0	5000	20	1765	230/3	48	HX5450R	1650	50	46"x30"x36"	524	
BDE-505009C	1.107-086.0	5.0	5000	20	1765	460/3	26	HX5450R	1650	50	46"x30"x36"	524	

OPTIONS

PART NO.	DESCRIPTION	
8.904-110.0	E-Zee Hose Reel Kit*100' (large cage)	
8.904-113.0	5000 PSI Hose Reel Kit,* (large cage)	•
8.904-115.0	5000 PSI Dual Hose Reel Kit,*† (large cage)	•

*Includes hose reel and mounting hardware

†Includes garden hose reel and high-pressure hose reel

Field Installed Factory Installed

See PAGE 36 for other configured options thru the SPECIALS DEPARTMENT.

- 7
- Aluminum frame
- Converts easily to skid style frame
- Flat-free tires for easy handling
- Hotsy Direct-drive Pump



pressure washers that easily convert from a cart to a skid for maximum cleaning versatility. Low profile handle and compact footprint. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, trigger gun, nozzles and chemical injector.



MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	MOTOR RPM	AMPS	PUMP Model	HOSE (FT)	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
HD 1.9/13 Ed	9.801-798.0	1.9	1300	2	120/1	1725	20	LFP2030S	50	35"x21"x24"	196	
HD 2.0/10 Ed	9.801-797.0	2.0	1000	1.5	120/1	1725	15	LFP2030S	50	35"x21"x24"	212	
HD 3.0/10 Ed	9.801-799.0	3.0	1000	2	120/1	1725	20	LF2830S	50	35"x21"x24"	219	
HD 3.5/20 Ea	9.801-800.0	3.5	2000	5	230/1	3450	22	LF3530F	50	35"x21"x24"	220	

OPTIONS		
PART NO.	DESCRIPTION	
9.807-754.0	Skid Feet (set of 4)	•
9.807-750.0	37.5" Long Handle	•
9.807-751.0	Handle with Hose Reel (Mild Steel Anthracite Handle)	
9.807-752.0	Hose Storage Hook	•
9.807-753.0	Wand Holder	•

Field Installed Factory Installed

COLD WATER PRESSURE WASHERS / GAS ENGINE



- Hotsy Direct-drive Pump
- 25' & 50' hose
- Convenient carrying handle
- Remote switch with 10' cord
- (ET-201409DX2 only)
- Standard Auto Start/Stop (ET-201409DX2 only)



DIRECT DRIVE

The ET Series is the handheld model of the electric-powered line, delivering cleaning capability up to 1400 PSI. All models are ETL safety certified and feature the Hotsy pump backed by a full 7-year limited warranty. All models come equipped with a 50' high-pressure hose, lance, nozzles and trigger gun.





MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	PUMP MODEL	HOSE (FT)	DIMENSIONS (LXWXH)	SHIP WT (LBS)	
ET-301109D	1.106-107.0	3.0	1000	2.0	115/1	HF2830S	50	20"x19"x17"	121	
ET-201409DX2	1.107-089.0	1.8	1400	2.0	115/1	HFP2030S	25	20"x19"x17"	123	

OPTIONS

•••••••		
PART NO.	DESCRIPTION	
8.920-952.0	Wall Mount Bracket	•
8.929-062.0	Detergent Injector (up to 3 GPM)	•

Field Installed Factory Installed

- Heater add-on
- **3000 PSI**
- Diesel, kerosene, #1 heating oil
- 3/8" QC inlet / outlet
 - nlet / outlet 10"
- Efficient vertical combustion
 5-gallon polyethylene fuel tank
- *36' ground fault interrupter plug*
- Thermostat temperature control
- Compact size
- 10" easy-roll tubed pneumatic tires



Add hot water cleaning economically. Portable water heater add-on for existing cold water pressure washers. Quick connect to cold water washer, supply fuel and power to Hot Box for hot water cleaning applications — USE ONLY WHEN NEEDED and keep the convenience of the portable cold water washer.



MODEL	PART NO.	GPM	PSI	VOLT/PH	DIMENSIONS (LXWXH)	
HOT BOX	1.103-910.0	Up to 5	Up to 3,000	120/1	27"x37"x39"	

- 3 stage vacuum motor delivers 100 CFM 100" sealed lift vacuum
- Simple curbside controls for easy use
- Rated for water up to 120°F and compatible with surface cleaners and hot water machines
- Bolt-on mounting system configured on the base to mount to a trailer for portability from site to site or optional caster wheel kit
- Small footprint allows the unit to be mounted
- where limited space is available

 Drain port and filter basket work together to
- keep sludge from clogging



Stop wash water from flowing down a drain or away from your area by collecting the wastewater from pressure washing. As EPA laws become more prevalent and strive to conserve water quality, contract cleaners and construction sites will need to recover their wash water and runoff. Eliminate the problem with the RC Series that is capable of recovering and transferring up to 30 GPM of water and transferring to a holding tank. Its small footprint allows the RC Series to be mounted on a trailer. Be fully in control of water flow with the optional water dikes and drain covers to stop water from flowing down a drain or away from your site. Comes standard with a 50' vacuum hose and scupper head.



Reliable 120V Transfer Pump capable of transferring 30 GPM of water to the holding tank

Shown with optional caster wheel kit



MODEL	PART NO.	ELECTRICAL	AMPS	RECOVERY	TANK (GAL)	VACUUM MOTOR	DIMENSIONS (LXWXH)	SHIP WT (LBS)
RC-30E	1.103-514.0	120V	15	30 GPM	27	3 Stage 100 CFM 100" sealed lift	24"x27"x59"	127
OPTIONS								
PART NO.	DESCRIPTIO	N						
8.751-299.0	Mosmatic Su	irface Cleaner with	n Vac Port		•			
8.928-887.0	Caster Wheel	Kit			•			
8.925-858.0	Discharge Ho	ose Kit			•			
8.618-451.0	Vacuum Hos	е			•			
8.928-850.0	Scupper Hea	d			•			
	S & WATER DI	/EQ						
PART NO.	DESCRIPTIO							
8.751-135.0		36" x 36", 30oz P\	/C					
8.751-136.0	Drain Cover,	48" x 48", 30oz P\	/C		•			
8.751-137.0	Drain Cover,	48" x 48", Urethan	e		•			
8.751-138.0	Water Dike, 1	0', 22oz PVC			•			
8.751-139.0	Water Dike, 1	0', 40oz Urethane	9		•			
8.751-140.0	Water Dike, 2	20', 22oz PVC			•			
	Mater Diller C	20', 40oz Urethane						

HOTSY'S DIRTY DOZEN DETERGENTS

For soap recommendations, start with these 12 category leaders

#1 BREAKTHROUGH!

Hotsy's best all-purpose detergent

Highly concentrated with dilution ratio of 150 to 1. Whether removing grease or cleaning a finely painted automobile, Breakthrough! is the best all around "go to" detergent. Breakthrough's high foaming action attacks dead oxidized paint and can be used in hard and cold water applications.

#2 TRANSPORT VEHICLE WASH

Hotsy's most economical detergent for vehicles

If it has wheels, Transport is the detergent of choice. Autos, buses, motor homes, mobile homes, tractor trailers are just a few applications for this economical liquid detergent. Great when used as a pre-spray for engine compartment cleaning and safe on all painted surfaces, stainless steel, aluminum and glass.

#3 RIPPER I

Hotsy's best heavy-duty degreaser

Ripper 1 is specially formulated for degreasing heavy equipment and hard to remove road film on tractor trailers, end loaders, excavators and back hoes, yet still safe on painted surfaces. Non-caustic and user-friendly.

#4 HOTSY BROWN

Hotsy's best detergent for oil field cleaning

A degreasing detergent specially formulated for the oil field that also works great on oil soaked or stained surfaces such as, frames and equipment. A non-Butyl based product that works good in cold water, Hotsy Brown is a caustic based product and should not be used on fine painted surfaces or magnesium, galvanized or aluminum.

#5 Advanced formula ALUMINUM BRIGHTENER

Hotsy's answer to aluminum cleaning

This highly concentrated acid with dilution ratios up to 20 to 1, attacks oxidized aluminum leaving a "like new" look to the surface after the initial application. Not to be used on new aluminum or aluminum that is not oxidized.

#6 VERDE ALL-PURPOSE

Environmentally-friendly general purpose cleaner

A unique blend of environmentally preferred chemicals that provide great cleaning capabilities in all water conditions and all water temperatures. Superior foaming and fast-rinsing provide great results while saving money and the environment.

OCTEN DETENDET

7 SALT LICK

Hotsy's answer to removing salt and de-icing solutions

Salt Lick is formulated to remove salt, calcium chloride and de-icing solution used on winter roads by breaking down the cyrstalline structure of ice melt products and prevents them from re-cystalizing so they can be washed away. Salt Lick is a dual-purpose concentrated detergent attacking heavy soils and road film.

***8** CARBOCHLOR

Hotsy's #1 choice for cleaning food preparation areas

A special emulsifying formula with high powered bleach for food processing plants. Excellent on tough odors, stains, dirt, oils and fats left behind on equipment, floors, and walls. NSF recognized for use in Federally Inspected food plants.

#9 CON-B-GONE

Removes green concrete from trucks & tools

A fast acting acidic product that when applied to ready mix trucks, forms and tools softens dried concrete splatter allowing it to be rinsed away with a hot or cold water pressure washer. Con-B-Gone's foaming formula makes application over large areas quick and easy. A Hotsy Foamer increases dwell time and maximizes end results!

#10 TUBMATE GEN. PURPOSE

Hotsy's heavy-duty automatic parts washer detergent

A phosphate-free, biodegradable, super-concentrated liquid. Works great with automatic detergent injectors; can be automatically metered into aqueous parts washers. Quick oil release and solvent free. Heavy duty rust and corrosion inhibitor package protects against flash rusting; defoamers reduce foam in your aqueous parts washer.

11 FAT CAP

Hotsy's easy-to-use liquid graffiti remover

The #1 alternative to sand blasting or painting over unsightly graffiti. Designed for use on exterior brick, masonry and concrete surfaces. Deep-penetrating and fast-acting for effective and thorough loosening of spray paint graffiti and easy removal of graffiti from the surface being treated.

#12 CITRUS CLEAN

"Beefs" up the cleaning action of any Hotsy soap

This citrus-based detergent additive increases any detergent's cleaning and degreasing power and is a great degreaser in its own right, plus it also enhances rinsing. Contains d-limonene which is a great "natural" degreaser.



PLEASE NOTE: Hotsy detergents should be used following the instructions printed on the product label and best safety practices. Some Hotsy Detergents cannot ship UPS. For more information please contact your local Hotsy Distributor.

ALL-PURPOSE





✓ Biodegradable ✓ Kosher Approved

✓ Biodegradable

This highly concentrated detergent
is extremely popular and effective
for tackling crude oil and caked-on
buildup of fifth-wheel grease yet
it's gentle enough for fine finishes on
cars and to use for general cleaning
purposes. Helps restore all types of
oxidized paint surfaces. Excellent in
cold water.

PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.905-136.0	5 Gallons	Liquid	46	
8.905-137.0	55 Gallons	Liquid	504	
9.846-023.0	Super Concentrate Kit*	Powder/Liquid	102	
9.846-024.0	Super Concentrate Kit, 9 Pak*	Powder/Liquid	900	
9.846-082.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS:

pH: 12.92
Foaming Action: High
Reaction in Hard Water (TDS): Best
Dilution Ratio: 1:150
Color: Red/Orange
Scent: Solvent
Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Vehicles / Trucks, Painted / Unpainted Surfaces, Grease / Oils, Drilling Rigs, Degreasing, Road Film, Farm Equipment, Asphalt / Tar, Diesel Smoke, Food Industry, Baked-on Carbon, Floors / Walls, Construction Equipment, Stainless Steel, Oxidized Paint, Aluminum

BLUE	THUNDER	

painted surfaces. Helps restore all types of oxidized paint surfaces.

water. Regulate amount desired with

detergent metering valve.

BLUE IMUNDEK					 Kosher Approved
A popular vehicle cleaner for removing exhaust deposits, road film	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
and bug residue. Excellent for older	8.905-442.0	5 Gallons	Liquid	46	
vehicles with faded finishes; helps restore oxidized paint surfaces of	8.905-445.0	Super Concentrate*	Powder	49	
	8.905-446.0	9 Pak Super-Concentrate*	Powder	442	
all types. Great for housewashing. Works well in cold water.	8.698-246.0	275-Gallon Tote	Liquid	2472	
	9.846-070.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS: PH: 12.46 Foaming Action: Low Reaction in Hard Water (TDS): Good Dilution Ratio: 1:100 to 1:120 Color: Clear Light Blue Scent: Musty Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Farm Machinery, Road Film, Diesel Smoke, Restaurants, Stainless Steel, Aluminum, Log Cabins / Houses, Floors / Walls, Grease / Oils, Decks / Fences / Siding, Exhaust Trails, General Cleaning

PRODUCT 31					✓ Biodegradable✓ Kosher Approved
Here's an all-purpose vehicle cleaner for a wide range of applications.	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
Use it on over-the-road tractors	9.846-057.0	Super Concentrate Kit*	Powder/Liquid	59	
and trailers, truck fleets, and cars. Powerful yet gentle cleaners attack road film and dirt while protecting	9.846-081.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS: PH: 12.32 Foaming Action: Medium Reaction in Hard Water (TDS): Good Dilution Ratio: 1:150 Color: Clear Green Scent: Floral/ Solvent Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Farm Equipment, Stainless Steel, Aluminum, Oxidized Paint, Agriculture, Whitewalls, General Cleaning, Degreasing, Transportation, Painted / Unpainted Surfaces, Fiberglass, Engine Cleaning, Food Industry, Vinyl Tops, Road Film, Dirt

SUPER X					✓ Biodegradable✓ Kosher Approved
This concentrated powder is popular	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
in the agriculture, construction, transportation and food industries. Safe on all surfaces, it's easy to use, low foaming and free rinsing. Mix Instructions: Dissolve 8 oz.	8.904-673.0	50 lb Drum	Powder	53	
	8.904-674.0	100 lb Drum	Powder	104	
	8.904-675.0	450 lb Drum	Powder	469	
(1 cup) with 1 gallon warm (90°)	9.846-061.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS: ■ pH: 10.98@1% ■ Foaming Action: Low ■ Reaction in Hard Water (TDS): Best ■ Dilution Ratio: See Above ■ Color: Red ■ Scent: Slight Detergent Free Rinsing RECOMMENDED APPLICATIONS AND USES: Food Industry, Painted / Unpainted Surfaces, Aluminum, Diesel Smoke, Farming, Road Film, General Cleaning, Fiberglass, Veterinarian Services, Stainless Steel, Kennels, Dirt, General Livestock, Grease / Oils, Floors / Walls, Carbon

* Entire contents of each additive drum should be used at one time, do not attempt to make partial batches.



Low foaming detergent for reduced rinse time. A highly efficient truck wash detergent designed to be low foaming and very free rinsing. Super XL cleans without the bubbles and foam to drastically reduce rinse time and is a favorite of contract cleaners and truck wash facilities.

				✓ Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.904-725.0	5 Gallons	Liquid	46	
8.904-728.0	55 Gallons	Liquid	494	
8.904-677.0	Super Concentrate Kit*	Powder	48	
8.904-681.0	Super Concentrate Kit, 8 Pak*	Powder	391	
9.846-062.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS:
pH: 11.96
Foaming Action: Low
Reaction in Hard Water (TDS): Best
Dilution Ratio: 1:128
Color: Red
Scent: Detergent Free Rinsing RECOMMENDED APPLICATIONS AND USES: Vehicles / Trucks, Construction, Vehicles, Engines, Road Film, Grease / Oils, Agriculture, Food Processing, Aluminum, Diesel Smoke, General Cleaning, Dairy Farms, Industrial Equipment, Stainless Steel, Carbon, Veterinarians, Farm Equipment, Mold / Mildew, Degreasing Surfaces, Painted / Unpainted, Floors / Walls

VEHICLE WASH

TRANSPORT VEHICLE WASH Hotsy's #1 Recommended Vehicle Wash



✓ Biodegradable Kosher Approved

Biodegradable

	-				· Rosher Approved
PAR	RT NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.90	04-732.0	5 Gallons	Liquid	47	
8.90	04-733.0	55 Gallons	Liquid	506	
9.84	46-027.0	Super Concentrate*	Powder/Liquid	53	
9.84	46-092.0	Super Concentrate, 9 Pak*	Powder/Liquid	523	
9.84	46-089.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS:
PH: 12.7
Foaming Action: Medium
Reaction in Hard Water (TDS): Good
Dilution Ratio: 1:100
Color: Red
Scent: Musty Solvent Hotsv Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Automotive / Trucking / Vehicles, Stainless Steel, Aluminum, Glass, Engines, Whitewalls, Vinyl and Metal Tops, Salts, Fiberglass, Painted Surfaces, Clay, Degreasing

CARBON-ATE					✓ Biodegradable✓ Kosher Approved
Especially formulated to clean engine compartments and hard to	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
clean vehicles, road film, white wall	8.904-896.0	5 Gallons	Liquid	47	
tires and carbon (diesel smoke and	8.904-898.0	55 Gallons	Liquid	506	
exhaust). Works great on polished aluminum.	9.846-000.0	Super Concentrate Kit*	Powder/Liquid	94	
	9.846-001.0	Super Concentrate Kit, 9 Pak*	Powder/Liquid	873	
	9.846-063.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS: PH: 12.48 Foaming Action: High Reaction in Hard Water (TDS): Best Dilution Ratio: 1:150 Color: Green Scent: Slight Detergent Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Vehicles, Painted / Unpainted Surfaces, Road Film, Grease / Oil, Baked-on Carbon, Fish / Animal Oils, Bug Residue, Fiberglass, Mold / Mildew, Whitewalls, Aluminum, Stainless Steel

ENVY SUPER CONCENTRATE

well in all water conditions and temperatures. Ultra concentrated, hard water formula, high-foaming, easy rinsing, flows in colder

temperatures.

ENVI JUPEN GUNGENINAI	6				 Kosher Approved
A vehicle wash detergent that works well in all water conditions and	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
temperatures. Ultra concentrated,	8.698-077.0	Qty 4, 1 Gallon Containers	Liquid	35	
hard water formula, high-foaming, easy rinsing, flows in colder	8.698-078.0	5 Gallons	Liquid	44	

SPECIFICATIONS:
PH: 9.74
Foaming Action: High
Reaction in Hard Water (TDS): Good
Dilution Ratio: 1:700
Color: Dark Green
Scent: Floral Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Trucks, Automobiles, Automatic Car Washes

✓ Biodegradable



✓ Biodegradable

✓ Biodegradable

Diadaanadahla



FLEET WASH

Extremely effective for cleaning stainless steel, aluminum, glass and painted surfaces on cars. trucks. RV's, buses, trailers, mobile homes, tractors etc. Perfect pre-spray for cleaning engines, whitewall tires, vinyl and metal tops. Helps restore all types of oxidized paint surfaces.

P

9

q

				\checkmark	Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)		
9.846-029.0	Super Concentrate Kit, 9 Pak*	Powder/Liquid	846		
9.846-090.0	5 Gal. Product Label, Pkg. of 50				

SPECIFICATIONS:
PH: 10.74
Foaming Action: High
Reaction in Hard Water (TDS): Best
Dilution Ratio: 1:100 to 1:150
Color: Clear Green
Scent: Fresh Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Automotive / Trucking / Construction, Stainless Steel, Aluminum / Polished Aluminum, Heavy Equipment, Glass, Fiberglass, Painted Surfaces, Whitewalls, Acid Rain, Pollution, Road Grime, Diesel Smoke

Outstanding cleaning at a low cost. Ideal for heavy duty, automatic and manual vehicle washing applications. Use at the rate of 1 to 2 oz. per 100 gallons of wash water.

				✓ Biodegradable✓ Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.904-829.0	50 lb Drum*	Powder	53	
8.904-830.0	100 lb Drum*	Powder	104	

SPECIFICATIONS: DH: 12.05 Foaming Action: Medium Reaction in Hard Water (TDS): Good Dilution Ratio: 1-2 oz/100 Gal Color: Maroon Scent: Sight Detergent Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Automotive, Road Film, Grease / Oil, Trucking, Dirt, Bug Residue, Construction, Salts, Diesel Soot, Stainless Steel / Aluminum, Engine Cleaning, Fifth Wheels

NYTRO

Truckers and fleet maintenance specialists swear by this heavy duty detergent. It makes diesel smoke stains, road film and gummy grease residue disappear. It's equally effective on floors, walls and windows. Use this powerful cleaner where other detergents and chemicals fail.

				✓ Biodegradable✓ Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.904-929.0	5 Gallons	Liquid	47	
9.846-021.0	Super Concentrate Kit*	Powder/Liquid	90	
9.846-080.0	5 Gal. Product Labels, Pkg. of 50			

SPECIFICATIONS: DH: 11.78 Foaming Action: High Reaction in Hard Water (TDS): Poor Dilution Ratio: 1:120 Color: Clear Scent: Detergent Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Automotive / Trucking / Aircraft, Grease / Cooking Oil, Aluminum, Carbon, Construction / Farm Equipment, Dirt, Food Industry, Acid Rain, Stainless Steel, Crates / Pens, Diesel Smoke, Mold / Mildew, Painted / Unpainted Surfaces, Floors / Walls, Road Film, Clay

PANEL WASH

A highly effective, economical detergent designed for the truck and transportation industry. It contains a small amount of caustic and is effective as a "pre-spray" to attack the final layer of soil that other products might not penetrate.

				✓ Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
9.846-106.0	Super Concentrate Kit*	Powder/Liquid	53	
9.846-107.0	Super Concentrate Kit, 8 Pak*	Powder/Liquid	423	
9.846-086.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS: PH: 12.8 Foaming Action: Medium Reaction in Hard Water (TDS): Good Dilution Ratio: 1:35 to 1:100 Color: Purple Scent: None Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Trucking, Salts, Bug Residue, Construction, Carbon, Diesel Smoke, Asphalt / Tar, Exhaust Trails, Acid Rain

POWER SHINE

High foaming detergent with increased dwell time. Specially formulated for washing vertical painted surfaces and removing bug residue, road film and oxidized paint leaving a shiny surface behind. Safe to use on aluminum and works well in cold water.

				 ✓ Biodegradable ✓ Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.904-912.0	5 Gallons	Liquid	48	
9.846-008.0	Super Concentrate Kit*	Powder/Liquid	100	
9.846-064.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS: = pH: 12.8 = Foaming Action: High = Reaction in Hard Water (TDS): Best = Dilution Ratio: 1:100 to 1:150 = Color: Clear Blue Green = Scent: Fresh Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: TAutomotive / Trucking / Vehicles, Road Film, Grease / Oil, Construction / Farm Equipment, Salts / Clay / Dirt, Bug Residue, Stainless Steel, Whitewalls / Vinyl Tops, Diesel Smoke, Aluminum, Fiberglass, Painted / Unpainted Surfaces

* Entire contents of each additive drum should be used at one time, do not attempt to make partial batches.

DETERGENTS // VEHICLE WASH / DEGREASER

VEHICLE PRE-SOAK

Used to remove stubborn soils like bugs, tar, oil and grease deposits on vehicles. Apply before washing in order to penetrate and break up soils. The more time allowed to soak, the less scrubbing is required.

PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.698-230.0	5 Gallons	Liquid	49	
8.698-231.0	55 Gallons	Liquid	515	

SPECIFICATIONS:
PH: 12.84
Reaction in Hard Water (TDS): Good
Dilution Ratio: 1:60 to 1:40
Color: Clear Blue
Scent: Citrus RECOMMENDED APPLICATIONS AND USES: Automotive, Road Film, Grease / Oil, Trucking, Salts, Bug Residue, Construction, Carbon, Diesel Smoke, Asphalt/Tar, Exhaust Trails

RINSE AID

With a dilution ratio of 5000 to 1, this is an extremely economical additive for rinse cycles. Hotsy Rins Aid prevents spotting on vehicles.

					✓ Biodegradable✓ Kosher Approved
	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
ise	8.905-609.0	5 Gallons	Liquid	46	

SPECIFICATIONS:
PH: 7.58
Foaming Action: Low
Reaction in Hard Water (TDS): Good
Dilution Ratio: 1:5000
Color: Clear
Scent: None
Free Rinsing RECOMMENDED APPLICATIONS AND USES: Automotive, Aircraft Equipment, Fiberglass, Trucking, Heavy Equipment, Aluminum, Construction, Painted / Unpainted Surfaces, Stainless Steel

VEHICLE TIRE & RIM CLEANER

Fast and easy way to deep clean the black rubber, road film and brake dust soils from your tires and rims. Simply spray, wait and rinse. This product should be used to clean tire and wheels before adding tire dressing. Make tire dressings look better and last longer. Safe to use on all tires. Safe for steel and aluminum wheels, including coated wheels.

1				✓ Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.698-229.0	Qty 12, 1 Quart	Liquid	28	

SPECIFICATIONS:
PH: 12.9
Foaming Action: High
Reaction in Hard Water (TDS): Average
Dilution Ratio: Ready to Use
Color: Colorless
Scent: Detergent RECOMMENDED APPLICATIONS AND USES: Automotive / Trucking / Vehicles, Road Film, Grease / Oil, Construction / Farm Equipment, Whitewalls / Vinyl Tops, Aluminum

DEGREASERS

RIPPER I Hotsy's #1 Recommended Degreaser

A highly concentrated, non-caustic cleaner for heavy equipment and trucks. This fast-acting cleaner is especially effective on off-road and grease-clogged equipment and great on hard-to-remove road film on tractor/trailers. Safe to use indoors and on all painted surfaces. Excellent for cleaning shop floors and walls where inside cleaning is necessary.

				✓ Kosher Approved	
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)		
8.904-846.0	5 Gallons	Liquid	47		
8.904-847.0	55 Gallons	Liquid	506		
9.846-009.0	Super Concentrate Kit*	Powder/Liquid	90		
9.846-010.0	Super Concentrate Kit, 9 Pak*	Powder/Liquid	804		
8.698-092.0	275 Gallon Tote	Liquid	2472		
9.846-065.0	5 Gal. Product Label, Pkg. of 50				

SPECIFICATIONS:
PH: 12.85
Foaming Action: Medium
Reaction in Hard Water (TDS): Good
Dilution Ratio: 1:100
Color: Clear Pink-Violet
Scent: Slight Detergent
Hotsy Continuous Clean Additive RECOMMENDED APPLICATIONS AND USES: Automotive / Trucking / Aircraft, Food Industry, Grease / Cooking Oil, Carbon, Construction / Farm Equipment, Dirt, Aluminum, Acid Rain, Oil Field Equipment / Drill Pipe Tools, Crates / Pens, Diesel Smoke, Mold / Mildew, Painted / Unpainted Surfaces, Floors / Walls, Road Film, Stainless Steel



 Biodegradable Kosher Approved

✓ Biodegradable

✓ Biodegradable



RIPPER II

✓ Biodegradable Kosher Annroved

✓ Kosher Approved

					 Kosner Approved
The serious big brother to Ripper I. Used when extra degreasing power for heavy equipment is needed. The	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
	8.904-850.0	5 Gallons	Liquid	51	
detergent's superior cleaning action	8.904-851.0	55 Gallons	Liquid	550	
will handle the heavy grease oil and hydraulic oils. Has been used as a	9.846-011.0	Super Concentrate Kit*	Powder/Liquid	93	
pre-paint wash and is not to be used	9.846-091.0	Super Concentrate Kit, 9 Pak*	Powder/Liquid	2511	
on fine painted surfaces, galvanized, aluminum or magnesium surfaces.	8.698-093.0	275 Gallon Tote	Liquid	2472	
	9.846-066.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS: Use Caution: Wear Protective Gear = pH: 13.34 = Foaming Action: Medium = Reaction in Hard Water (TDS): Poor = Dilution Ratio1:40 ■ Color: Red ■ Scent: Solvent ■ Hotsy Continuous Clean Additive RECOMMENDED APPLICATIONS AND USES: Construction Equipment, Heavy Equipment, Construction, Diesel Smoke, Mines, Fifth Wheels, Stainless Steel, Carbon, Oil Drillers, Off Road Machinery, Unpainted Surfaces, Grease / Oil, Food Plants, Degreasing, Engine Cleaning, Salts / Clay / Dirt

RIPPER III

This heavy-duty degreaser is ideal for use as a hood and vent cleaner and will also strip paint and powder coated surfaces. Also great for cleaning hood and vents at restaurants. DO NOT USE on aluminum, magnesium, galvanized metal or fine painted surfaces. Contains Sodium Hydroxide.

PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)
8.904-839.0	5 Gallons	Liquid	51
8.904-840.0	55 Gallons	Liquid	550

SPECIFICATIONS: Use Caution: Wear Protective Gear
pH: 13.72
Foaming Action: Low Reaction in Hard Water (TDS): Poor Dilution Ratio: 1:40 Color: Brown Scent: Musty Hotsy Continuous Clean Additive RECOMMENDED APPLICATIONS AND USES: Restaurants, Asian Food Grease, Carbon, Food Processing Plants, Deep Fat Fryers / Ovens, Heavy-Duty Degreasing, Food Processing Equipment, Burnt-On Food, Graffiti Removal, Hoods, Vents, Ducts

CITRUS CLEAN

This citrus-based detergent additive increases any detergent's cleaning and degreasing power and is a great degreaser in its own right, plus it also enhances rinsing. Citrus Clean contains d-limonene which is a great "natural" degreaser.

				\checkmark	Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)		
8.904-985.0	5 Gallons	Liquid	44		
8.904-986.0	55 Gallons	Liquid	466		

SPECIFICATIONS:
PH: 9.5-10.2
Foaming Action: High Reaction in Hard Water (TDS): Best Dilution Ratio: 1:5 to 1:50
Color: Clear Light Yellow Scent: Citrus Free Rinsing RECOMMENDED APPLICATIONS AND USES: Detergent Additive, Degreasing - All Surfaces, Grease /Oil

OIL FIELD & HEAVY EQUIPMENT



✓ Biodegradable Kosher Approved

✓ Biodegradable

This versatile, extra-strong detergent is caustic based for fast and thorough cleaning. Hotsy Brown is a non-butyl product that is particularly effective on carbon based deposits such as road film and exhaust stains, as well as dirt and grease. Not recommended for use on fine finishes, aluminum, galvanized metal or magnesium.

PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.915-455.0	5 Gallons	Liquid	48	
8.915-453.0	55 Gallons	Liquid	515	
9.846-044.0	Super Concentrate Kit*	Powder/Liquid	87	
9.846-005.0	Super Concentrate Kit, 9 Pak*	Powder/Liquid	758	
9.846-098.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS: ■ Use Caution: Wear Protective Gear ■ pH: 11.5 - 11.9 ■ Foaming Action: Medium ■ Reaction in Hard Water (TDS): Good ■ Dilution Ratio: 1:50 Color: Brown Scent: Slight Detergent Hotsy Continuous Clean Additive RECOMMENDED APPLICATIONS AND USES: Construction Equipment, Farm Equipment, Road Film, Diesel Smoke, Heavy Equipment, Fifth Wheel Grease, Off-Road Machinery, Degreasing, Stainless Steel, Unpainted Surfaces, Engine Cleaning, Grease / Oil, Carbon, Salts / Clay / Dirt

HOTSY ORANGE

Hotsy's moderate pH degreaser. This surfactant based non-caustic detergent was developed for people in the oil field that needed good degreasing and cleaning but also needed to be user friendly and have a pH of below 10.5. Orange is safe on painted surfaces and is very effective on carbon based deposits; road film and truck exhaust stains.

PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
9.846-100.0	Super Concentrate Kit*	Powder/Liquid	67	
9.846-101.0	Super Concentrate Kit, 9 Pak*	Powder/Liquid	584	
8.698-066.0	275 Gallon Tote*	Liquid	2472	
9.846-102.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS: Use Caution: Wear Protective Gear = pH: 10.45 = Foaming Action: Medium = Reaction in Hard Water (TDS): Good = Dilution Ratio: 1:50 Color: Orange Scent: Citrus Hotsy Continuous Clean Additive RECOMMENDED APPLICATIONS AND USES: Construction Equipment, Farm Equipment, Road Film, Diesel Smoke, Heavy Equipment, Fifth Wheel Grease, Off-Road Machinery, Degreasing, Stainless Steel, Unpainted Surfaces, Engine Cleaning, Grease / Oil, Oil & Gas Drilling, Salts / Clay / Dirt, Carbon [This product cannot be shipped via UPS.]

ALUMINUM & STAINLESS STEEL CLEANERS

ADVANCED FORMULA ALUMINUM BRIGHTENER Hotsy's #1 Recommended Aluminum and Stainless Steel Cleaner



✓ Biodegradable Kosher Approved

✓ Biodegradable Kosher Approved

An extra-strength, acid-based, alum cleaner and brightener designed for non-polished aluminum tanks and trailers, aluminum wheels and for preparing aluminum surfaces for pa This easy-to-apply formula restores aluminum and makes it look like new in just one application. Do NOT use glass, polished aluminum or anodize aluminum. Contains no phosphates.

ninum r	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)
1	8.698-227.0	5 Gallons	Liquid	50
ainting. s ew e on zed	8.698-228.0	55 Gallons	Liquid	537

SPECIFICATIONS: Use Caution: Wear Protective Gear 2.3@20:1 Dilution Foaming Action: Low Reaction in Hard Water (TDS): Best Dilution Ratio: 1:5 to 1:20 Color: Clear Light Straw Scent: Sharp RECOMMENDED APPLICATIONS AND USES: Truck Trailers, Aluminum, Diesel Smoke, Road Film, Grease / Oils, Plastics, Welding Smut, Carbon

HOTSY POLISHED ALUMINUN	✓ Biodegradable✓ Kosher Approved				
This non-etching specialty cleaner contains a concentrated blend of	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
surfactants and glycol ethers to quickly	8.904-749.0	5 Gallons	Liquid	48	
penetrate and remove dirt, grease, oil, road film, diesel smoke and welding smut.	8.904-751.0	55 Gallons	Liquid	521	

SPECIFICATIONS: Use Caution: Wear Protective Gear = pH: 1.12 = Foaming Action: Medium = Reaction in Hard Water (TDS): Best = Dilution Ratio: Undiluted Color: Clear Straw Scent: Citrus RECOMMENDED APPLICATIONS AND USES: Polished Aluminum, Road Film, Oil, Aluminum, Diesel Smoke, Grease, Stainless Steel, Welding Smut, Dirt

YELLOW	FEVER	
Yellow Fever	is a powerful	acidic cleane

					· Roonor Appr
ner	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
1	8.698-061.0	5 Gallons	Liquid	50	
	8.698-062.0	55 Gallons	Liquid	537	

and aluminum brightener to clean and restore stained aluminum surfaces, without dulling bright aluminum finishes. Yellow Fever is effective in removing diesel smoke, grease, carbon, oils and resins. Removes hard-water scale. Effective in removing mineral efflorescence from brick, masonry and concrete. AVOID CONTACT WITH GLASS OR ANODIZED ALUMINUM.

				✓ Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.698-061.0	5 Gallons	Liquid	50	
8 698-062 0	55 Gallons	Liquid	537	

SPECIFICATIONS: DH: @5% Solution: 10.48 - Foaming Action: Medium - Reaction in Hard Water (TDS): Good Dilution Ratio: 1:60 - Color: Clear - Scent: Detergent
Phosphate Free Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Truck Trailers, Plastics, Welding Smut, Carbon, Road Film, Asphalt, Diesel Smoke, Hard-Water Scale, Tars / Resins, Aluminum and Bright Aluminum, Grease / Oils, Efflorescence on Masonry

✓ Biodegradable



NVIRONMENTALLY FRIENDLY

VERDE ALL PURPOSE Hotsy's #1 Recommended Environmentally Friendly Detergent



Biodegradable Kosher Approved

✓ Biodegradable

✓ Biodegradable

A unique blend of environmentally preferred chemicals that provide great cleaning	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
capabilities in all water conditions and all	8.698-079.0	5 Gallons	Liquid	44	
water temperatures. Superior foaming and fast-rinsing provide great results while	8.698-080.0	55 Gallons	Liquid	485	

SPECIFICATIONS: PH: 8.64 Foaming Action: High Reaction in Hard Water (TDS): Good Dilution Ratio: 150:1 Color: Colorless Scent: Slight Detergent RECOMMENDED APPLICATIONS AND USES: Truck Trailers, Road Film, Cars & Trucks, Plastics, Aluminum, Fine Automotive Finishes, Diesel Smoke, Grease/Oils, Carbon

ENVIRO-CLEA	Ņ
-------------	---

saving money and the environment.

ENVIRU-CLEAN					✓ Kosher Approved
This phosphate-free detergent is excellent for communities where phosphates	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
are prohibited from entering municipal	8.904-927.0	5 Gallons	Liquid	47	
wastewater treatment facilities. It's safe for	9.846-026.0	Super Concentrate Kit*	Powder/Liquid	97	
all kinds of cleaning, yet has the cleaning power of highly concentrated degreasers.	9.846-079.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS: PH: 12.32 Foaming Action: High Reaction in Hard Water (TDS): Good Dilution Ratio: 1:150 Color: Pink Scent: Fresh & Clean Phosphate Free Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Automotive, Stainless Steel, Grease / Oils, Construction, Painted / Unpainted Surfaces, Diesel Smoke, Farm Machinery, Floors / Walls, Road Film, Restaurants, General Cleaning, Aluminum / Polished Aluminum

ENVIRO	GARD	2
A quick-rele	ase deter	ge

Non-emulsifying.

It is great on polished aluminum.

ENVIRO GARD 2					✓ Kosher Approved
A quick-release detergent formulated for use with filtration-type or gray water	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
recycle systems. This phosphate-free,	8.905-124.0	55 Gallons	Liquid	487	
biodegradable liquid releases oils and greases rapidly for maximum separation. Low solid content reduces build-up.	9.846-030.0	Super Concentrate Kit*	Powder/Liquid	42	
	9.846-094.0	Super Concentrate Kit, 9 Pak*	Powder/Liquid	373	
allowing more cycles between discharge.	9.846-083.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS: DH: @5% Solution: 10.48 Deaming Action: Medium Reaction in Hard Water (TDS): Good Dilution Ratio: 1:60 Color: Clear Scent: Detergent
Phosphate Free Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Recyle Systems / General Purpose Cleaner

TRANSPORTATION SPECIALTY CLEANERS



Biodegradable Kosher Approved

•	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)
	8.698-081.0	5 Gallons	Liquid	46
	8.698-082.0	55 Gallons	Liquid	502

SPECIFICATIONS: PH: 13.24 Reaction in Hard Water (TDS): Best Dilution Ratio: 1:16 to 1:100 Color: Dark Red Scent: Slight Detergent Phosphate Free RECOMMENDED APPLICATIONS AND USES: Truck Trailers, Snow Plows, Automobiles, Fifth Wheels, Construction Equipment

400 WAX

Added to a final rinse, this long-lasting, liquid wax creates a durable finish that improves a vehicle's appearance and keeps dirt from adhering to the surface. It gives added protection against salt, air pollution and acid rain. With a dilution ration of 2000 to 1, this is a highly economical wax.

Salt Lick is formulated to remove salt, calcium chloride and de-icing solution used on winter roads by breaking down the cyrstalline structure of ice melt products and prevents them from re-cvstalizing so they can be washed away. Salt Lick is a dual-purpose concentrated detergent attacking heavy soils and road film.

				✓ Biodegradable✓ Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.905-531.0	5 Gallons	Liquid	43	

SPECIFICATIONS:
pH: 5.32
Foaming Action: None
Reaction in Hard Water (TDS): Best
Dilution Ratio: 1:2000 ■ Color: Straw ■ Scent: Musk ■ Free Rinsing RECOMMENDED APPLICATIONS AND USES: Automotive, Hot Waxes, Vinyl Tops, Trucking, Painted Surfaces, Whitewalls, Vehicles, Stainless Steel, Fiberglass

* Entire contents of each additive drum should be used at one time, do not attempt to make partial batches.



✓ Biodegradable

AERO ONE

Approved for aircraft use, this nontoxic compound has met rigorous standards set by the aerospace industry (Aerospace Specification AMS-1526). High concentrations of corrosion inhibitors fight effects of salt, air pollution and acid rain. Meets Aerospace Materials Specification AMS-1526C Cleaner for Aircraft Exterior Surfaces, Water-Miscible, Pressure-Spraying Type.

					✓ Kosher Approved
	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
v	8.905-634.0	5 Gallons	Liquid	47	
-	8.905-636.0	55 Gallons	Liquid	505	

SPECIFICATIONS:
PH: 12.5
Foaming Action: High
Reaction in Hard Water (TDS): Good
Dilution Ratio: 1:50
Color: Red
Scent: Solvent
Free Rinsing Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Aircraft, Painted / Unpainted Surfaces, Degreasing, Cars / Trucks, Aluminum, Stainless Steel, Ground Support Equipment, Air Pollution, Acid Rain, Road Film / Salt, Oxidized Paint, Exhaust Trails

CARBON-ATE PLUS

A special wax is added to Carbon-Ate Plus to provide a durable, attractive finish that keeps dirt from adhering to surfaces and protects them against salt, air pollution and acid rain. Easy to rinse and it reduces water spotting. It works great on polished aluminum.

PART NO.DESCRIPTIONFORMSHIP WT (LBS)8.904-832.05 GallonsLiquid479.846-019.0Super Concentrate Kit*Powder/Liquid949.846-063.05 Gal. Product Label, Pkg. of 50					✓ Biodegradable✓ Kosher Approved
9.846-019.0 Super Concentrate Kit* Powder/Liquid 94	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
· · ·	8.904-832.0	5 Gallons	Liquid	47	
9.846-063.0 5 Gal. Product Label, Pkg. of 50	9.846-019.0	Super Concentrate Kit*	Powder/Liquid	94	
	9.846-063.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS: PH: 12.48 Foaming Action: High Reaction in Hard Water (TDS): Best Dilution Ratio: 1:150 Color: Green Scent: Slight Detergent Free Rinsing Hotsy Continuous Clean Additive RECOMMENDED APPLICATIONS AND USES: Automotive, Painted Surfaces, Road Film, Acid Rain, Trucking, Bug Residue, Diesel Smoke, Pollution, Vehicles, Stainless Steel, Grease / Oil, Salts / Clay / Dirt, Aluminum, Hot Waxes, Exhaust Trails, Vinyl Tops

POWER SHINE PLUS

A special wax is added to provide a durable, attractive finish that keeps dirt from adhering to surfaces and protects them against salt, air pollution and acid rain. Helps restore oxidized paint surfaces of all types. Easy to rinse; reduced water spotting. It is great on polished aluminum.

				✓ Biodegradable✓ Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.904-817.0	5 Gallons	Liquid	48	
9.846-018.0	Super Concentrate Kit*	Powder/Liquid	100	
9.846-077.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS:
PH: 12.84
Foaming Action: High
Reaction in Hard Water (TDS): Best
Dilution Ratio: 1:150
Color: Blue-Green
Scent: Floral-Herbal
Free Rinsing Hotsy Continuous Clean Additive RECOMMENDED APPLICATIONS AND USES: Automotive, Grease / Oils, Polished Aluminum, Trucking, Road Film, Exhaust Trails, Construction, Diesel Smoke / Carbon, Bug Residue, Aircraft Equipment, Oxidized Paint, Dirt / Salts / Clay

INSTITUTION & FOOD PREPARATION



✓ Biodegradable Kochar Approved

A special emulsifying formula with high powered bleach for food processing plants. Excellent on tough odors, stains, dirt, oils and fats left behind on equipment, floors, and walls, Chlorinated for extra punch. NSF Registered for use in federally inspected food plants.

				 Kusher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.904-979.0	5 Gallons	Liquid	46	
8.904-980.0	55 Gallons	Liquid	495	
9.846-016.0	Super Concentrate Kit*	Powder/Liquid	54	
9.846-017.0	Super Concentrate Kit, 9 Pak*	Powder/Liquid	468	
9.846-076.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS:

pH: 12.46

Foaming Action: High

Reaction in Hard Water (TDS): Good

Dilution Ratio: 1:60

Color: Clear

Scent: Chorline and Solvent Hotsy Continuous Clean Additive RECOMMENDED APPLICATIONS AND USES: Packing Plants, Agriculture, Grease / Oils, Animal Fats, Farm Industry, Stainless Steel, Aluminum, Floors / Walls , Veterinarians, Seafood Oils / Fish, Crates / Pens, Tough Odors, Food Industry, Mold / Mildew, Baked on Carbon, Dirt / Stains



DETERGENTS // INSTITUTION & FOOD PREPARATION / SPECIALTY CLEANERS

MIRACLE WIZZ

An unsurpassed liquid for removing baked-on carbon found in food preparation, bakeries, restaurants, food processing plants, etc. It is also great for engine degreasing and graffiti removal.

				\checkmark	Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)		
8.904-924.0	5 Gallons	Liquid	52		
9.846-013.0	Super Concentrate Kit*	Powder/Liquid	129		
9.846-067.0	5 Gal. Product Label, Pkg. of 50				

SPECIFICATIONS: DH: 13.08 **F** Foaming Action: Medium **Reaction** in Hard Water (TDS): Poor **D**Iution Ratio: 1:5 to 1:100 **C** Color: Brown **S** Scent: Musty **Hotsy** Continuous Clean Additives **RECOMMENDED APPLICATIONS AND USES:** Food Processing, Smokehouse Cleaner, Degreasing, Mol, Bakeries, Baked-on Carbon, Grease / Oils, Mildew, Restaurants, Stainless Steel, Painted, Cooking Oils, Automotive, Engine Degreasing, Unpainted Surfaces, Graffiti Removal

SPECIALTY CLEANERS CON-B-GONE Hotsy's #1 Recommended Specialtly Cleaner



✓ Biodegradable Kosher Approved

. . .

(D) I

✓ Biodegradable

✓ Biodegradable

Con-B-Gone is a fast acting acidic product that when applied to ready mix trucks, forms and tools softens dried concrete splatter allowing it to be rinsed away with a hot or cold water pressure washer. Con-B-Gone's foaming formula makes application over large areas quick and easy. A Hotsy Foamer increases dwell time and maximizes end-results!

PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.698-083.0	5 Gallons	Liquid	45	
8.698-084.0	55 Gallons	Liquid	494	
8.698-085.0	275 Gallon Tote	Liquid	2472	

SPECIFICATIONS: D H: 2.16 **C** Foaming Action: Medium **R** Reaction in Hard Water (TDS): Good **D** Dilution Ratio: Ready to Use **C** Color: Light Yellow **S** Scent: Sharp **RECOMMENDED APPLICATIONS AND USES:** Concrete Trucks, Mixing Equipment, Tools, Construction Vehicles

HOTSY "99"

A highly concentrated formulation of non-fuming inhibited phosphoric acid and surfactants that remove concrete, welding smut, hard-water scale, rust, mortar, and diesel smoke. It is ideal for cleaning and descaling concrete trucks, metal surfaces, equipment, bricks and glass. DO NOT USE on polished aluminum.

COIL CONDITIONER

A special conditioner for removing hard water deposits and scale from the internal surface of heating coils.

				✓ Biodegradable✓ Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.904-842.0	5 Gallons	Liquid	51	
8.904-843.0	55 Gallons	Liquid	546	

SPECIFICATIONS: ■ Use Caution: Wear Protective Gear ■ pH: 1.4 ■ Foaming Action: Medium ■ Reaction in Hard Water (TDS): Best ■ Dilution Ratio: 1:10 to 1:20 ■ Color: Clear ■ Scent: Citrus **RECOMMENDED APPLICATIONS AND** USES: Trucks, Stainless Steel / Steel, Bricks, Heavy Equipment, Rust, Construction, Mortar, Diesel Smoke, Vehicles, Hard Water Scale

ONER					 ✓ Blode ✓ Kosher A 	gradable Approved
^r for removing and scale from the	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	PRICE/LB	
eating coils.	8.904-764.0	Qty 12, 2 Lbs Container	Powder	28		

SPECIFICATIONS: ■ pH: @ 1% Solution: 1.48 ■ Foaming Action: Medium ■ Reaction in Hard Water (TDS): Best ■ Dilution Ratio: 2 lbs to 5 gallons ■ Color: White ■ Scent: Slight Detergent RECOMMENDED APPLICATIONS AND USES: Pressure Washers, Boilers, Rust Remover

LIQUID FOAMER

When combined with most detergents, it creates mountains of suds and increases dwell time to loosen dirt, grease and oil. Designed for use with foam generators and revolving brushes.

				 Biodegradable Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.905-527.0	5 Gallons	Liquid	46	

SPECIFICATIONS: ■ pH: 6.78 ■ Foaming Action: High ■ Reaction in Hard Water (TDS): Good ■ Dilution Ratio: 1:25 to 1:100 ■ Color: Pale Yellow ■ Scent: Slight Detergent **RECOMMENDED APPLICATIONS AND USES:** Food Plants, Foaming Brushes, Detergent Additive, Vehicles, Foam Booster / Foam Stabalizer, Vertical Surfaces

HOTSY PHOSPHATIZER NO. 2

A complete and economical detergent and phosphatizing system for one-step phosphatizing of iron and steel parts. Phosphatizer No. 2 can be used at temperatures ranging from 120°F to 180°F. Equally effective in spray, dip and wipe-on applications. A quality product with 20+ years of successful history in the industry.

Z					\checkmark	Kosher Approved
PART I	NO.	DESCRIPTION	FORM	SHIP WT (LBS)		
8.904-	977.0	5 Gallons	Liquid	51		
8.904-	978.0	55 Gallons	Liquid	525		
9.846-	015.0	Super Concentrate Kit*	Powder/Liquid	103		
9.846-	069.0	5 Gal. Product Label, Pkg. of 50				

SPECIFICATIONS: ■ pH: 3.08 ■ Foaming Action: Medium ■ Reaction in Hard Water (TDS): Good ■ Dilution Ratio: 1:15 to 1:30 ■ Color: Clear ■ Scent: Detergent RECOMMENDED APPLICATIONS AND USES: Safe for Use with Hotsy Pressure Washers, Paint Preparation

* Entire contents of each additive drum should be used at one time, do not attempt to make partial batches.

Cap SPE ming Action: Low ■ Dilution Ratio: Use Undiluted ■ Color: Clear Yellow ■ Scent: Alcohol **RECOMMENDED** APP d Masonry, Brick, Stone, Painted Stone

DESCRIPTION

Qty 12, 1 Quart

Qty 4, 1 Gallon

DESCRIPTION

1-Pack, 550 Count

1-P OL PACKS

FAT CAP GRAFFITI REMOVER Brick, Masonry & Concrete

PART NO.

8.698-028.0

8.698-027.0

PART NO.

8.698-117.0

Use Directions: One pack per 50 lbs. of laundry. Place packet into detergent reservoir or place directly into wash wheel.

An easy-to-use liquid graffiti remover

masonry and concrete surfaces. Hotsy

penetrating and fast acting for effective and thorough loosening of spray paint graffiti and easy removal of the graffiti from the surface being treated. This is

designed for use on exterior brick,

Fat Cap Graffiti Remover - Brick, Masonry and Concrete cleaner is deep

SPECIFICATIONS:
PH: 10.5-11
Dilution Ratio: 1 pack per 50 lbs of towels
Color: White
Scent: None FEATURES AND BENEFITS: Dissolvable pouch is easy to use, no waste and no Formaldehyde. Large pack Size - 560 loads! Non Phosphate - it's Eco Friendly. Detergent and softener formula extends towel life with no additional softener required.

VITAL OXIDE Cleaner & Disi

Vital Oxide is used to disinfect and sanitize just about any surface. Vital Oxide can be used as a disinfectant and diluted to a sanitizer for spray and/or foam application. There's no smell and it's safe for animals and humans.

SPECIFICATIONS: DH: 8.0-9.0 Dilution Ratio: Ready to Use / 9:1 / 5:1 ■ Color: Clear ■ Scent: Mild RECOMMENDED APPLICATIONS AND

USES: Food Processing, Restaurants, Boats/Ships Veterinary: Kennels, transport vehicles, Education: Schools,

Daycare, Gyms & Locker Rooms Healthcare: Nursing Homes. Laundry Rooms, Pharmacies, Ambulances

NUBLEND DISINFECTANT 220 Multi-purpose Disinfecting Spray

PART NO. in disinfectant cleaning technology, 8.644-723.0 formulated to disinfect an impressive list of microbial pathogens with 8.644-722.0 reduced contact times when compared 8.644-721.0 to other disinfectants. It is effective against a wide range of bacteria, viruses 8.644-720.0 and fungi, including Pseudomonas 8.644-719.0 Aeruginosa, Staphylococcus Aureus, 8.644-718.0 MRSA, HIV-1, HBV, HCV and Canine Parvovirus. Ready to use with no mixing required. EPA registered

NuBlend Disinfectant 220 is the latest

mixing required, EPA registered.
SPECIFICATIONS: pH: @ 1% Solution: 12.2 Dilution Ratio: Ready to Use Foaming Action: Low Color: Clear Liquid Scent: Mild/Mint
RECOMMENDED APPLICATIONS AND USES: Schools and Daycare Facilities, Food Processing, Healthcare, Hospitality, Veterinary, Cruise lines

275 Gallons [made to order]

DESCRIPTION

12x1 Quarts

4x1 Gallon

5 Gallons

15 Gallons

55 Gallons

[NOT AVAILABLE IN CANADA]

1-PACK: LAUNDRY PORTION CONTRO
SPECIFICATIONS: D PH: @ 5% Solution: 12.8 D Foar APPLICATIONS AND USES: Concrete, Masonry, Painter
the strongest product in the Hotsy Fat Cap Remover family of products.

sinfectant			✓ Health Canada Registered	✓ NSF ✓ EPA Registered
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.639-560.0	Qty 6, 1 Quart (US only)	Liquid	15	
8.639-558.0	Qty 4, 1 Gallon (US only)	Liquid	36	
8.639-559.0	Qty 4, 1 Gallon (Canada only)	Liquid	36	
8.644-292.0	5 Gallons (US only)	Liquid	43	
8.758-937.0	5 Gallons (Canada only)	Liquid	43	
8.642-823.0	15 Gallons (US only)	Liquid	127	
8.698-112.0	55 Gallons (US only)	Liquid	585	
8.756-449.0	55 Gallons (Canada only)	Liquid	585	
8.644-439.0	Vital Oxide Secondary Label - Full Strength 3" x 3"			
8.642-868.0	Vital Oxide Secondary Label - 5:1 Dilution 3" x 3"			
8.642-869.0	Vital Oxide Secondary Label 9:1 Dilution 3" x 3"			

FORM

Liquid

Liquid

Liquid

Liquid

Liquid

Liquid

SHIP WT (LBS)

30

36

43

127

585

2450





✓ Biodegradable

✓ Kosher Approved



EPA Registered



SHIP WT (LBS)

27

34

SHIP WT (LBS)

35

FORM

Liquid

Liquid

FORM

Powder

PARTS WASHER

TUBMATE GENERAL PURPOSE DETERGENT Hotsy's #1 Recommended Parts Washer Detergent



A phosphate-free, biodegradable, super-concentrated liquid. Works great with automatic detergent injectors; can be automatically metered into aqueous parts washers. Quick oil release and solvent free. Heavy duty rust and corrosion inhibitor package protects against flash rusting; defoamers reduce foam in your aqueous parts washer.

	-			-
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.905-144.0	5 Gallons	Liquid	51	
8.905-150.0	55 Gallons	Liquid	548	
9.846-032.0	Super Concentrate Kit*	Powder/Liquid	94	
9.846-084.0	5 Gal. Product Label, Pkg. of 50			

SPECIFICATIONS:
PH: 13.1
Foaming Action: Non-foaming Reaction in Hard Water (TDS): Good Dilution Ratio: 1.0 - 12.0 oz / gallon Color: Clear
Scent: Detergent
Phosphate Free RECOMMENDED APPLICATIONS AND USES: Aqueous Parts Washers, Iron / Steel, Copper, Painted Parts, Magnesium, Plastic

TUBMATE TORQUE

Hotsy Tubmate Torque soft metal powder is a heavy duty parts washer detergent specially formulated for use on softer materials such as brass, copper, stainless steel and plastics. Higher alkalinity and biodegradable solvent-based cleaning booster provides effective penetration and removal of difficult oil, grease and carbon-based soils while protecting softer materials.

PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)
8.905-262.0	40 Lbs Pail	Power	42
8.905-263.0	400 Lbs Drum	Powder	415

SPECIFICATIONS: ■ pH: 12.8 ■ Foaming Action: Non-foaming ■ Reaction in Hard Water (TDS): Best ■ Dilution Ratio: 0.5 - 2.0 oz. per gallon ■ Color: Yellow ■ Scent: Citrus **RECOMMENDED APPLICATIONS AND USES:** Aqueous Parts Washers, Degreaser, Aluminum, Copper / Brass, Stainless Steel / Steel, Parts made of soft metal

TUBMATE IRON & STEEL CLEANER

A heavy-duty liquid detergent, perfect for truckers, manufacturers, railroads, food processors, bakeries and other applications requiring the removal of heavy grease, baked-on carbon, loose paint and coatings. Rust and corrosion inhibitors and heavy defoamer package. Not an EPA hazardous waste at a pH of less than 12.5.

PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)
8.905-087.0	5 Gallons	Liquid	48

SPECIFICATIONS: ■ pH: 12.98 ■ Foaming Action: Non-foaming ■ Reaction in Hard Water (TDS): Good ■ Dilution Ratio: 1:1 to 1:40 ■ Color: Brown ■ Scent: Mild **RECOMMENDED APPLICATIONS AND USES:** Trucking, Railroads, Heavy Grease, Bakeries, Aqueous Parts Washer, Baked-on Carbon, Food Processing, Iron / Steel, Loose Paint, Manufacturing, Stainless Steel, Pots / Pans

TUBMATE ALL PURPOSE DETERGENT (POWDER)

Tubmate All Purpose Cleaner is a highly concentrated powder parts washer detergent that is effective in cleaning heavy grease and oil buildup on parts made of ferrous metal. It contains extra corrosion inhibitor for protection against corrosion and flash rusting, and an enhanced nonfoaming formula to assist with foam control in the parts washer sump.

PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)
8.904-779.0	40 Lbs Pail	Powder	42
8.904-782.0	100 Lbs Drum	Powder	115
8.904-785.0	450 Lbs Drum	Powder	450

FINISH LINE

Hotsy Finish Line is a moderate pH, water-based detergent formulated for use in manual parts washers and aqueous parts sinks. It removes greases, oils and grime, and can be used on most surfaces, including steel, stainless steel, brass, aluminum, copper and plastics. This detergent has a pleasant citrus odor.

PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.904-738.0	5 Gallons	Liquid	48	

SPECIFICATIONS: ■ pH: @ 5% Solution: 7.0 - 9.0 ■ Foaming Action: Low ■ Reaction in Hard Water (TDS): Good ■ Dilution Ratio: 5 Gallons to 16 Gallons ■ Color: Honey ■ Scent: Citrus **RECOMMENDED APPLICATIONS AND USES:** Manual parts washers, Automotive, Trucking, Degreaser, Oils, Plastics, All Metals, Painted Parts

^{*} Entire contents of each additive drum should be used at one time, do not attempt to make partial batches.

VAPOR CORROSION INHIBITOR

Especially effective in inhibiting rust in top and front-load automatic parts washers. It contains a superior blend of rust and corrosion inhibitors that give outstanding protection in both the liquid and vapor phase. This helps protect steel and prevents rust in automatic parts washers. It also helps prevent rust and corrosion on metal parts being cleaned.

PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.905-168.0	Qty 4, 1 Gallon	Liquid	37	
8.905-169.0	5 Gallons	Liquid	46	
8.905-170.0	55 Gallons	Liquid	493	

SPECIFICATIONS:
PH: 10.2 Foaming Action: None Reaction in Hard Water (TDS): Good Dilution Ratio: 10 oz. per 25 gallons Color: Clear Solvent: Solvent RECOMMENDED APPLICATIONS AND USES: Soak Tanks, Rinse Water, Ultrasonic Cleaning, Recycle Systems, Automatic Parts Washers

HOTSY DEFOAMER

This defoamer is added to parts-washer cleaning solutions to reduce foam buildup. Hotsy Defoamer does not interfere with the detergent's normal cleaning ability.

r	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)
	8.904-652.0	Qty 4, 1 Gallon Containers	Liquid	36
	8.904-653.0	55 Gallons	Liquid	495

SPECIFICATIONS:
pH: 8.5
Reaction in Hard Water (TDS): Good
Dilution Ratio: 1.0 - 2.0 oz / Gallon
Color: Opaque White
Scent: None RECOMMENDED
APPLICATIONS AND USES: Aqueous Parts Washers

PAINT & POWDER COAT STRIPPER

Hotsy Paint & Powder Coat Remover is a fast and effective alkaline stripper. It dissolves all types of stubborn paint and powder coats, including epoxy finishes. Do NOT use on aluminum, magnesium or galvanized metals. With a use dilution pH of less than 12.5, this product is NOT EPA hazardous waste.

PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.905-099.0	5 Gallons	Liquid	48	

SPECIFICATIONS: ■ pH: 13.5 ■ Foaming Action: Non-foaming ■ Reaction in Hard Water (TDS): Best ■ Dilution Ratio: Undiluted ■ Color: Hazy Brown ■ Scent: Musty RECOMMENDED APPLICATIONS AND USES: Iron & Steel

FLOOR CARE

FLOOR WASH

Designed for use as a floor cleaner for food, automotive and manufacturing industries. It can be used with hot or cold water and is formulated with a color indicator for control of concentration and strength, and to insure uniform coverage and rinsing.

				 Kosher Approved
PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)	
8.749-836.0	40-lb. Pail	Powder	44	
8.749-837.0	100-lb. Drum	Powder	103	

SPECIFICATIONS: ■ pH: @ 1% Solution: 11.92 ■ Foaming Action: Low to Medium ■ Reaction in Hard Water (TDS): Good ■ Dilution Ratio: See mix instructions ■ Color: Orange-Yellow ■ Scent: Citrus ■ Hotsy Continuous Clean Additives RECOMMENDED APPLICATIONS AND USES: Automotive, Concrete, Driveways, Decks / Fences, Manufacturing, Floors / Walls, Floor Scrubbers, Grease / Oils, General Cleaning

SHOP FLOOR CLEANER

					\checkmark	Kosher Approved
nly	PART NO.	DESCRIPTION	FORM	SHIP WT (LBS)		
iiiy	8.698-131.0	5 Gallons	Liquid	47		
ı	8.698-132.0	55 Gallons	Liquid	512		
n	8.698-133.0	275 Gallons	Liquid	2,815		

SPECIFICATIONS: ■ Use Caution: Wear Protective Gear ■ pH: 13.26 ■ Foaming Action: Medium ■ Reaction in Hard Water (TDS): Best ■ Dilution Ratio: 1:128 ■ Color: Clear Light Red ■ Scent: Solvent RECOMMENDED APPLICATIONS AND USES: Shop Floors, Equipment Rooms



✓ Biodegradable

✓ Biodegradable

Kosher Approved



KÄRCHER FLOOR CARE DETERGENTS

PART NO.	DESCRIPTION	SIZE	DILUTION	DESCRIPTION
Red Carpet				
8.695-207.0	Red Carpet Super Pre-Spray	4 x 1 gal case	1:16	blue-green color, citrus scent, medium foam
8.695-209.0	Red Carpet Super Conditioning Rinse	4 x 1 gal case	1:128	green color, citrus scent, low foam
8.695-210.0	Red Carpet Extraction Cleaner	4 x 1 gal case	1:128	bright blue color, citrus scent, low foam
8.695-211.0	Red Carpet Wool & Natural Fiber Cleaner	4 x 1 gal case	1:128	slate blue color, citrus scent, low foam
8.695-213.0	Red Carpet Liquid Defoamer	4 x 1 gal case	1:128	no added fragrance
8.695-218.0	Red Carpet Enzyme Deodorizer	4 x 1 gal case	1:4	amber col, citrus scent
8.695-219.0	Red Carpet Odor Neutralizer	4 x 1 gal case	1:128	clear, floral scent
8.695-222.0	Red Carpet Pro Spotter	12 x 1 qt case	1:1	clear, no added fragrance
8.628-441.0	2-Gallon Pump Sprayer with Wand			
iCapsol™ Enca	psulating Chemical			
8.695-226.0	iCapsol™ encapsulating chemical	4 x 1 gal case	1:16	amber color, no added fragrance
8.695-469.0	iCapsol™ encapsulating chemical	12 x 1 pt case	1:16	amber color, no added fragrance
8.695-227.0	iCapsol™ encapsulator/protector	4 x 1 gal case	1:16	amber color, no added fragrance
8.695-470.0	iCapsol™ encapsulator/protector	12 x 1 pt case	1:16	amber color, no added fragrance
Gum Remover	Detergents			
8.641-480.0	SG3 Bp chemical bottle	20 x 90 ml	1:1	
Compass™ Che	emical			
8.695-241.0	Compass™ Clean	4 x 1 gal case	RTU	Food service cleaner/degreaser
8.695-242.0	Compass™ Shine	4 x 1 gal case	RTU	Concentrated bathroom cleaner/deodorizer
8.695-243.0	Compass™ Rinse	12 x 1 qt case		Spot free drying agent
Kärcher Neutra	l Floor Cleaner			
8.698-102.0	Kärcher Neutral Floor Cleaner	4 x 1 gal	1:128	Daily cleaning on finished/non-finished floors.
8.698-103.0	Kärcher Neutral Floor Cleaner	5 gal	1:128	Daily cleaning on finished/non-finished floors.
8.698-104.0	Kärcher Neutral Floor Cleaner	55 gal drum	1:128	Daily cleaning on finished/non-finished floors
Kärcher Wareh	ouse Floor Cleaner			
8.698-107.0	Kärcher Warehouse Floor Cleaner	5 gal	1:128	Daily cleaning on warehouse/industrial floors.
8.698-108.0	Kärcher Warehouse Floor Cleaner	55 gal drum	1:128	Daily cleaning on warehouse/industrial floors.
8.698-109.0	Kärcher Warehouse Floor Cleaner	275 gal tote	1:128	Daily cleaning on warehouse/industrial floors

PRODUCT MIXING STATIONS

Ball valve chemical proportioner for accurately diluting a chemical concentrate to the required ratio and for filling any sized container with diluted, ready-to-use chemical solution. Venturi injection system uses city water pressure to draw and blend chemical concentrate into the water stream to create an accurately diluted solution. Ball valve activation allows for hands-free dispensing.

PART NO.	DESCRIPTION
8.755-141.0	Single Product Mix - Low Flow
8.755-142.0	Single Product Mix - High Flow
8.755-143.0	Dual Product Mix - Low Flow
8.755-144.0	Dual Product Mix - High Flow

INTERNAL TANK FOAMERS

Tank Foamer is a low-volume foam applicator with an all stainless steel cart assembly for applying ready-to-use foaming chemicals. Connect compressed air to pressurize the 316L stainless steel tank and to inject air into the solution to greatly increase volume and coverage ability.

PART NO.	DESCRIPTION
8.755-145.0	5-Gallon Tank Foamer
8.755-146.0	16-Gallon Tank Foamer

POLY TANK 2-WHELLED FOAMER

The Portable 2-Wheel 20 Gallon LF Foamer is a "low volume" foam applicator for projecting ready-to-use foaming chemicals on to any surface up close or at distances up to 9 feet. Features stainless steel cart.

PART NO. DESCRIPTION

8.755-147.0 20-Gallon Poly Tank Foamer

ULTIMATE FOAMER WITH GAUGES

A medium volume foam applicator for projecting foaming chemicals on to any surface up close or at a distance. This venturi injection system uses city water pressure to draw and blend chemical concentrate into the water stream to create an accurately diluted solution.

PART NO.	DESCRIPTION
8.755-149.0	Ultimate Foamer

32 OZ. COMPACT AIRLESS FOAMER

Medium volume hose-end foam gun for diluting and applying foaming chemicals to any surface. Uses standard city water pressure to draw chemical concentrate from the attached bottle



and blend it into the water stream. The accurately diluted solution creates a clinging, wet foam which is then projected on to any surface up close or at distances up to 12 ft.

PART NO. DESCRIPTION

8.755-151.0 **Compact Airless Foamer**

HV FOAMER WITH GAUGES

The HV Foamer is a high volume foam applicator for projecting foaming chemicals on to any large surface. Foam is projected through a discharge hose and fan nozzle at distances up to 15 feet.



DRUM STICKS AND TOTE STICKS

Chemical pick-up assembly to draw chemical solution directly from a drum or tote. Comes complete with a Hastelloy chemical strainer, polypropylene chemical check valve and a selection of polypropylene hose barbs to connect to the most common sizes of hose or tube.

PART NO.	DESCRIPTION				
8.755-138.0	Tote Sticks - 54"				
8.755-139.0	Drum Stick Pick Up Assy - 33"				

HAND HYGIENE SPRAY DISPENSERS

Heavy-duty, stainless steel hand sanitizer or soap dispenser; when foot pedal is pressed, the system draws a set amount of ready-to-use chemical and dispenses it directly into the users hand. No electricity or batteries are required.

PART NO.	DESCRIPTION
8.755-136.0	Spray Dispenser, Wall Mount
8,755-137.0	Spray Dispenser, Floor Mount

TIMED ENTRYWAY FOAM SANITIZER

An automated foam applicator for projecting sanitizing chemicals on to floors of 3' wide walk doors to prevent cross contamination. When activated, this venturi injection system uses city water pressure to draw and blend chemical concentrate into the water stream to create an accurately diluted solution.



PART NO. DESCRIPTION

8.755-140.0 Timed Entry Way - 3' door

UNI-BODY COMBO DEMO FOAMER

A combination foam / sprav applicator for demonstrating foaming or non-foaming chemicals being applied to any surface. Use the foam wand and nozzle for rich, clinging foam, the airless foam wand to demonstrate without compressed air, or use the sprav nozzle to apply chemicals as a fan pattern spray. *Special order.



PART NO. DESCRIPTION

8.755-152.0 Uni-Body Combo Foamer

CITY WATER PRESSURE/FLOW TEST KIT

Connects to a standard male garden hose fitting. Provides quick confirmation of available water pressure and flow rate. Can also be mounted in-line with installed equipment to determine operational water pressure. *Special order.

PART NO. DESCRIPTION

8.755-148.0 Water Flow Test Kit



EMPTY 5 GALLON PAILS

PART NO 9.846-058.0 9.000-005.0

DESCRIPTION 5-Gal White Pail with Lid 5-Gal Red Pail with Lid

PART NU.	DESCRIPTION
8.755-150.0	HV Foamer

Effective January 1, 2021. Prices, specifications and product descriptions subject to change without notice.





TOOLS FOR HOTSY DETERGENTS



pH TEST STRIPS

A convenient method for accurate colorimetric pH indication. These strips feature covalently bound indicator dyes so that they will not bleed even in strong alkaline solutions. Strips can be immersed in samples for extended periods, so that even weakly buffered solutions can be accurately tested without contaminating the sample. The universal strip tests the full 0–14 pH range with a sensitivity of 1 pH unit. Intermediate range indicators provide a sensitivity of 0.3-0.5 pH units and narrow range strips provide a sensitivity of 0.2–0.3 pH units.

PART NO. 8.753-577.0

DESCRIPTION pH Test Strips / 100 pack

WATER SOFTENERS

Available from Wood Brothers Industries. Identify yourself as a Hotsy dealer when you call: (800) 383-1236 (402) 476-1236

WRITE-IN SECONDARY LABEL

DESCRIPTION

Hotsy secondary

detergent label (each)


PART NO. 8 642-714 0



USING A DETERGENT FOAMER TO APPLY SOAP

The Foam Cannon aids in applying detergent to tough cleaning surfaces. Simply fill the detergent reservoir with Hotsy detergent and attach it to the end of your wand. The pressure stream siphons the detergent, mixes it with air and water and dispenses foam up to a 30

foot cleaning radius. The foam blanket clings to all surfaces, increasing the dwell time. As the foam bubbles burst, they force the



WHAT SETS HOTSY DETERGENT APART FROM THE COMPETITION?

ials)

HOLSY DETENSINTS

MOST EFFECTIVE CLEANING

Unlike so-called "economy" products, Hotsy detergents are designed specifically for high-pressure, high-temperature cleaning. Hotsy detergents actually become more effective as temperatures increase. Inferior detergents begin to decompose under high temperature and pressure.

ECONOMICAL OPERATION

Hotsy detergents are super concentrated. They're designed to blend with water in ratios up to 150 parts of water to 1 part of detergent. Compare that to economy brands and you'll see why Hotsy detergents go a long way, and keep operating costs low.

ENVIRONMENTALLY FRIENDLY

You can use Hotsy detergents with complete confidence. They have no unpleasant odors, and almost all are biodegradable, so they're safe for the environment as well. Safety Data Sheets are available on all Hotsy detergents.

USE A WATER SOFTENER

You can use Hotsy detergents with complete confidence. They have no unpleasant odors, and almost all are biodegradable, so they're safe for the environment as well. Safety Data Sheets are available on all Hotsy detergents.



Watch our video on how to correctly clean using Hotsy detergents. https://bit.ly/HotsyDetergentCleaning



PROFESSIONAL FLOOR CARE



IDENTIFYING KÄRCHER EQUIPMENT BY NAME

All Kärcher branded machines are named systematically so that every machine name explains what the product is. Floor care product names range from a direct to indirect relation to the product, such as BV for Backpack Vacuum to KM for a Sweeper. Below is a chart to help with identifying Kärcher equipment by name.



FLOOR CARE MACHINE NAMES

			CAPACITY Liters / G/	ALLONS		CLEANING P CM / Inches	AIH	
KM	=	Sweeper	4	=	1	1	=	.4
Puzzi	=	Spotter or Box & Wand Extractor	25	=	6.6	4	=	1.6
NT	=	Wet/Dry Vacuum	30	=	7.9	12	=	5
BR	=	Scrubber with Cylindrical Brushes	35	=	9.25	20	=	8
BD	=	Scrubber with Disc Brushes	38	=	10.0	30	=	12
В	=	Scrubber	40	=	10.6	40	=	16
SG	=	Steamer	48	=	12.68	50	=	20
SGV	=	Steamer Vacuum	50	=	13.21	175	=	69
SG1	=	Gum Remover	51	=	13.47			
AB	=	Air Blower	60	=	15.85			
BV	=	Backpack Vacuum	68	=	17.96			
CV	=	Upright Vacuum	70	=	18.49			
EB	=	Compact Sweeper	75	=	19.81			
BDS	=	Floor Machine	80	=	21.13			
			150	=	39.63			

OPTIONS / FEATURES

BP C AP W HEPA Tact

Te R

=	Battery Powered
=	Scrubbers = Pad Assist
=	Extractors = Compact
=	Semi-Automatic Filter Cleaning System
=	Scrubbers = Traction Drive
=	HEPA Level Air Filtration
=	Triggered Airdraft Cleaning Technology
=	Automatic Power Outlet
=	Ride-On Machine

EXAMPLE: KM 70/20 C = SWEEPER, 18.49 GALLONS / 8 INCHES CLEANING PATH / COMPACT

EB 30/1

This ultra-quiet and compact sweeper is perfect for quick clean-ups in busy and crowded areas. The rechargeable battery pack ensures safety by eliminating trip hazards. The EB 30/1 is built to handle small cleaning jobs in professional working environments.

- Cordless electric sweeper designed for commercial applications.
- Flexible and professional interim clean-up
- Powerful, rechargeable battery provides for up to 45 minutes of operation on hard surface, and up to 30 minutes on carpet.
- Extremely quiet operation allows for cleaning even during business hours, making it ideal for use in noise sensitive areas
- Optional high-speed battery charger available for complete charging in 50 minutes.



EB 30/1

TECHNICAL SPECIFICATIONS		
Cleaning path	in	12
Container capacity	in²	67
Operating noise level	dBA	56
Battery runtime	min	30-45
Standard battery charge time	hr	1
Weight	lbs	6
Dimensions (LxWxH)	in	10 x 12 x 43

PART NO. DESCRIPTION

1.545-121.0

EB 30/1, 12 inch, lithium-ion battery-operated sweeper

ACCESSORIES		
	PART NO.	DESCRIPTION
	6.654-328.0	Lithium-ion battery for EB 30/1
■ 6.654-197.0 Battery charger		
	4.762-400.0	Cylindrical brush
	4.762-401.0	Cylindrical stiff red brush, for hard-wearing surfaces

KM 70/20 C

Speedy sweeping and painless maintenance rolled into one convenient package. This sweeper provides superior sweeping performance in a compact manual push sweeper. It is built to be rugged and durable for long life.

- Cleans paths, sidewalks and warehouses quickly and conveniently
- Main cylindrical brush is driven by both wheels so that it sweeps equally well in either right or left turns
- Rugged metal pinion drive for long life
- Durable design
- Height of cylindrical brush can be easily adjusted in five positions by a knob on the handle





		KM 70/20 C
TECHNICAL SPECIFICATIONS		
Cleaning path / width - main broom	in	19
Cleaning path / width with 1 sb	in	28
Cleaning path / width with 2 sb	in	36
Side broom diameter	in	13
Debris container capacity	gal	11
Practical productivity	sq ft/hr	30,000
Weight	lbs	50.7
Dimensions (LxWxH)	in	51.2 x 30.14 x 40.7

PART NO.	DESCRIPTION
1.517-106.0	KM 70/20 C , twenty eight inch walk-behind sweeper
1.517-107.0	KM 70/20 C 2SB , thirty six inch push sweeper with dual brushes

ACCESSORIES		
PART NO.	DESCRIPTION	
■ 6.966-005	.0 Side broom, water-resistant bristles, extremely durable, suitable for all types of surfaces	
■ 6.906-041	41.0 Main broom, water-resistant bristles, extremely durable, suitable for all types of surfaces	
4.040-772	4.040-772.0 Dust Filter	
□ 2.640-908	.0 Litter picker—for picking up waste	



KM 70/30 C BP ADV

Fast and efficient for sweeping indoors or outdoors—on hard floor or carpet for those that need to get the job done right the first time. Rely on this sweeper to make quick work of any sweeping needs with its highly productive electronic driven broom. It also features active dust control for optimum air quality. User-friendly features such an easy adjust broom height and an adjustable handle height make this a popular machine with those who use it.

- Delivers fast, efficient sweeping for hard and soft floor surfaces
- 28 inch cleaning path
- For a wide range of applications indoors and outdoors, with a particularly quiet battery drive system at 69 dBA
- Features Active Dust Control with a separate fan and flat pleated filter for dustless sweeping indoors
- Simple adjustment of the main cylindrical broom and side broom



r e. with	
ve	
an	
an his a	
ith a	
	55.00
<u>,</u>	C

KM 70/30 C BP ADV

TECHNICAL SPECIFICATIONS		
Cleaning path / width - main broom	in	19
Cleaning path / width with 1 sb	in	28
Side broom diameter	in	13
Debris container capacity	gal	11
Practical productivity	sq ft/hr	30,800
Operating noise level	dBA	59
Sweeping method	direct / overthrow	direct
Weight	lbs	105.8
Dimensions (LxWxH)	in	48.8 x 28 x 45.2

PART NO. 1.517-218.0 DESCRIPTION KM 70/30 C BP ADV, twenty eight inch walk-behind sweeper

ACCESSORIES

	PART NO.	DESCRIPTION
	6.966-005.0	Side broom, water-resistant bristles, extremely durable, suitable for all types of surfaces
	6.906-041.0	Main broom, water-resistant bristles, extremely durable, suitable for all types of surfaces
•	6.904-367.0	Flat dust filter
	2.640-908.0	Litter picker—for picking up waste
	5.731-625.0	Filter element - plastic filter, water resistant, washable, saves maintenance costs
	6.907-041.0	Standard cylindrical broom - water-resistant universal bristles, extremely durable, suitable for all types of surfaces

KM 75/40 W BP

Big enough to get the job done, but maneuverable to clean congested areas, count on the KM 75/40 W Bp for your sweeping needs. This machine provides the versatility to clean anywhere—carpet or hard floors, indoors or out. We built it to perform day in and day out in the toughest commercial applications.

- Cleans effectively indoors and out for increased versatility
- Self-propelled, 30 inch cleaning path for increased productivity
- Easy to understand controls increase operator effectiveness
- Over throw sweeping system with an easily removed hopper make emptying quick and efficient
- Active dust control system provides better air quality
- Air is vacuumed through a high-efficiency automotive style filter
- Manual filter shaker for easy cleaning and consistent results
- Wet-sweep bypass for cleaning wet surfaces



		KM 75/40 W BP
TECHNICAL SPECIFICATIONS		
Cleaning path / width - main broom	in	22
Cleaning path / width with 1 sb	in	30
Side broom diameter	in	16.5
Debris container capacity	gal	10.5
Practical productivity	sq ft/hr	36,328
Operating noise level	dBA	64
Sweeping method	direct / overthrow	direct
Weight	lbs	172
Dimensions (LxWxH)	in	56 x 30 x 46.5

PART NO. 9.840-739.0 DESCRIPTION KM 75/40 W Bp, thirty inch walk-behind sweeper

ACCESSORIES

A DE DOUTRE D		
PART NO.	DESCRIPTION	
8.631-173.0	Battery, 12V AGM 70 Ah	
8.629-377.0	Automatic shelf charger, 24V, 24A, 115V, standard on AGM models	
■ 6.905-626.0	Side Broom, Soft Bristle (standard)	
■ 6.906-884.0 Main Broom, water-resistant bristles, extremely durable, suitable for all surfaces		
5.731-635.0	Flat pleated filter—plastic filter, water resistant, washable, reduces maintenance costs	
□ 6.905-625.0	Side broom, hard for heavy-duty cleaning	
□ 6.906-885.0	Main broom, Hard Bristle	
□ 6.906-950.0	6.906-950.0 Anti-Static Rolling Brush	
□ 2.641-571.0	Carpet Sweeping Kit (includes fluff filter, anti-static cylindrical brush and triple caster)	
□ 6.906-886.0	Main cylindrical broom, soft/natural - specifically designed with natural bristles for sweeping fine dust on smooth indoor floors	



PUZZI™ 8/1 C

The handy, compact and powerful Puzzit 8/1 C spray extraction cleaner is ideal for small areas and interim cleaning with excellent cleaning results.

- Foot switch makes it easy to turn on and off no bending required
- Transparent dome lid for easy-to verify operation
- Swivel casters for easy maneuvering
- Lightweight it can be easily transported
- 8' high-pressure solution and vacuum hose
- Removable dirty water tank





PUZZI™ 8/1 C

TECHNICAL SPECIFICATIONS	
Solution / recovery capacity g	al 2/1.8
Operating noise level dB	A 71
Power cord length	ft 33
Vacuum hp, stag	e 1.5 hp
Waterlift	in 88
Pump pressure p	si 14.5 - 43.5
Flow rate gp	m 0.26
Weight II	is 22
Dimensions (LxWxH)	in 22.5 x 13 x 17.3

PART NO.

DESCRIPTION

1.100-228.0

Puzzi[™] 8/1 C , 98 inch spray hose with integrated water feed and hand tool

ACO	ACCESSORIES			
	PART NO.	DESCRIPTION		
•	6.391-410.0 8-foot hose, complete with couplings			
	4.130-116.0	4-inch upholstery hand tool		
	4.130-127.0	Floor wand, 2-part with aluminum tube		
	□ 4.130-394.0 Floor wand, quick-action coupling, aluminum tube and metal nozzle			
□ 4.762-220.0 Hard surface kit (attaches to 4.130-127.0 & 4.130-394.0 wands)		Hard surface kit (attaches to 4.130-127.0 & 4.130-394.0 wands)		
	2.638-778.0 Window cleaning kit with 6.5Ft hose, (requires 2.389-293.0 coupler)			
	4.130-083.0	0-083.0 Venetian blind kit (requires 6.389-293.0 coupler)		
	4.130-444.0 Stair cleaning tool, 9-inch			
	□ 6.391-411.0 13-foot high pressure solution & vacuum hose			
	□ 4.130-117.0 Stone & hard surface nozzle			
	4.762-219.0	Hard surface adapter for standard hand tool		



It is easy to see why the Cadet[™] 7 is such a popular extractor. It has proven itself as a reliable, robust machine that deep cleans carpets to like-new. Operator controls are intuitive and ergonomic for hours of pain-free operation.

Brilliant deep clean

- Efficiently deep cleans carpet
- Floating vacuum shoe for superior recovery

Unmatched value

- The deep cleaning value choice
- Robust design built for reliability

Easy-to-use

- No-hose design makes it simple to fill and empty
- Ergonomic design reduces operator fatigue





		CADET 7
TECHNICAL SPECIFICATIONS		
Cleaning path/width	in	15
Solution/recovery capacity	gal	7/7
Practical productivity	sq.ft/hr	2,100
Operating noise level	dBA	69
Power cord length	ft	50
Vacuum	hp, stage	1.5, 3
Water lift	in	120
Pump pressure	psi	90
Flow rate	gpm	0.57
Weight	lbs	87
Dimensions (L x W x H)	in	41 x 17.5 x 34

EQUIPMENT

NRT NO.	DESCRIPTION
1.008-022.0 Cadet [™] 7, seven gallon carpet extractor	
CESSORIES	
PART NO.	DESCRIPTION
9.840-551.0	Air quality MicroFilter™ kit for Clipper™ 12/Admiral™ 8/Cadet™ 7, includes 2 filters and stainless steel bracket
8.623-611.0	One air quality MicroFilter™ refill
8.623-411.0	Power cord
	CESSORIES PART NO. 9.840-551.0 8.623-611.0

■ Included □ Optional



BRC 30/15

Get acquainted with the faster, simpler solution for small area extraction. The BRC 30/15 C is designed to productively clean carpet with less effort, resulting in timesaving productivity gains. In interest of simplicity this machine requires minimal service. It is lightweight and compact for ease of use and transportability.

Compact deep cleaning solution

High performance vacuum motor for faster drying time

Extraction is no sweat

- Quiet, lightweight, easy to use
- Designed for minimal service

Portable and mobile

- Large 10 inch non-marking wheels for easy transport and maneuverability
- Fold-down handle for easy transportation in any vehicle





BRC 30/15 C

TECHNICAL SPECIFICATIONS		
Cleaning path/width	in	10.5
Solution/recovery capacity	gal	4.5/4
Operating noise level	dBA	77
Power cord length	ft	25
Vacuum	hp, stage	1.5, 3
Water lift	in	120
Pump pressure	psi	26
Flow rate	gpm	0.38
Weight	lbs	79
Dimensions (L x W x H)	in	23 x 14 x 28

EQUIPMENT

PART NO.	
1.008-058.0	BRC 30/15 C, 4 gallon carpet extractor

ACCESSORIES

F	PART NO.	DESCRIPTION
∎ 8	8.621-604.0	Brush, chevron, 10-inch
• 8	8.629-552.0	Brush, extractor, natural bristles
∎ 8	8.631-030.0	Assembly, adapter (1/8"m x 1/4" fpt nipple)
0 8	8.629-036.0	Hose and hand tool kit, bag Included
0 8	8.600-075.0	Adapter 1/8 to 1/4 quick-disconnect for accessory solution hose

■ Included □ Optional

FLOOR CARE / VACUUMS



CV 300

Kärcher's CV 300 dual-motor upright vacuum is designed to be simultaneously powerful, lightweight and easy to maneuver. Our 1,000 watt vacuum motors pick up more dirt in a single pass than their comparable single-motor counterparts while our patented filtration system filters out particulates and allergens down to 0.3 microns.

- CRI approved for cleaner, healthier carpets
- Indicator lights alert operator to shut down or blockage
- Innovative, articulating head for superior maneuverability
- Ergonomic carrying handle for easy transport
- Powerful dual motor upright vacuum
- High quality three step filtration for optimum air quality



	-	1		
	ß			
	1	THE R.		
			ľ	
6	-	2		1

	CV 300
TECHNICAL SPECIFICATIONS	
Cleaning path	in 12
Productivity (practical) ft² /	/ hr 3,104
Power cord length	ft 40
Operating noise level d	dBA 69.5
Air flow rate c	cfm 102
Voltage 110V / 22	20V 110V
Motor	hp 0.24
Debris bag size	qt 3.7
Weight	Ibs 17
Dimensions (LxWxH)	in 11 x 12 x 48

PART NO. 1.012-059.0 DESCRIPTION CV 300, 120V/60 Hz

ACO	ESSORIES	
	PART NO.	DESCRIPTION
	8.632-214.0	Filter, exhaust
	8.628-477.0	Filter, motor protection
	8.630-933.0	Vacuum fan exhaust filter
	8.600-495.0	12-Inch replacement double row brush
	8.628-479.0	3-Ply filter dust bags, 10-pack
	8.633-398.0	Filter bag, package of 10
	8.634-975.0	Tool, 20" extension tool
	8.632-244.0	Tool, clips for tools, dark gray
	8.632-245.0	Tool, crevice tool, dark gray
	8.614-100.0	Dusting brush, dark gray
	8.614-629.0	Upholstery nozzle, dark gray
	8.604-147.0	Vacuum tools kit (crevice nozzle, upholstery nozzle, and mounting clip)



BV VAC PACTM HEPA SERIES

The BV/VAC PACTM HEPA series are portable back mounted vacuums great for increasing productivity, efficiency, while saving you money. Breath easier with HEPA-level filtration standard on these vacuums. They also have an ergonomic harness system, allowing the operator to move around quickly and easily for maximum productivity.

- HEPA filtration is now standard, providing optimum air quality by filtering with 99.9% effectiveness to 0.3 microns
- Vacuum hose is a top-mounted swivel design for left-hand and right-hand operation



		BV 7/1 VAC PAC 6 HEPA	BV 11/1 VAC PAC 10 HEPA
TECHNICAL SPECIFICATIONS			
Vacuum width, floor tool	in	13	13
Vacuum hose length	in	60	60
Power cord length	ft	50	50
Waste container capacity	qt	6	10
Operating noise level	dBA	67	67
Air flow rate	cfm	112	112
Waterlift	in of	104	104
Motor	watts	1,200	1,200
Weight	lbs	10	11
Dimensions (LxWxH)	in	8.5 x 8.8 x 19.8	8.5 x 8.8 x 23.7

PART NO.
1.014-013.0

DESCRIPTION BV 7/1 VAC PAC 6 HEPA backpack vacuum, 6 qt. (includes hose and tool kit) 1.014-014.0 BV 11/1 VAC PAC 10 HEPA backpack vacuum, 10 qt. (includes hose and tool kit)

ACCESSORIES

100	ESSORIES	
	PART NO.	DESCRIPTION
	8.628-666.0	Wand, 2 PC Aluminum Double Curve
	8.619-894.0	Hose Assembly
	8.639-285.0	HEPA pleated filter
	8.619-884.0	Cloth bag for VAC PAC™ HEPA 10 / BV 11/1
	8.619-885.0	10-quart paper bags, 10-pack for BV 11/1
	8.619-891.0	Paper bags for VAC PAC™ HEPA 6 / BV 7/1
	8.619-890.0	Cloth bags for VAC PAC™ HEPA 6 / BV 7/1
	8.619-887.0	Filter Dome
	8.604-141.0	VAC PAC™ tool kit (#02293 crevice tool, #02083 dusting brush, #02084 upholstery tool, #02085 upholstery tool brush, #02086 extension tube)
	8.628-451.0	Crevice Tool
	8.600-008.0	5" Upholstery Tool
	8.628-360.0	Upholstery Brush
	8.600-007.0	3-inch dusting tool with adapter
	8.628-445.0	Tool, Carpet
	8.628-444.0	Tool, bristle shod dry pick-up
	8.619-876.0	VAC PAC™ Crevice Tool
	8.639-285.0	HEPA pleated filter for VAC PAC™ HEPA 6 & 10 and BV 11/1
	8.631-254.0	Harness assembly for VAC PAC™ HEPA 6 & 10 and BV 11/1
	8.642-914.0	15" sidewinder carpet tool with 1.5" neck
	8.642-915.0	15" sidewinder hard floor brush with 1.5" neck
	8.642-916.0	18" sidewinder carpet tool with 1.5" neck
	8.642-917.0	18" sidewinder hard floor brush with 1.5" neck

Included Optional

Effective January 1, 2021. Prices, specifications and product descriptions subject to change without notice.

NT 25/1 AP

The NT 25/1 AP delivers powerful wet/dry cleaning in one compact package. This mobile all-purpose vacuum is easy and comfortable to transport to any job site. Designed for function, our vacuum features a light weight construction. Enjoy knowing that you can pick up anything wet or dry with this handy, practical machine.

- Comfortable and easy to handle and includes on-board accessory storage
- Five caster wheel design provides superior movement and stability
- Complete accessory holder and cord hook
- Convenient additional storage area on the turbine head
- Mobile and lightweight, perfect for transport to multiple locations
- Easy, safe and quickly exchangeable clip hose connections
- Ergonomically designed hose for operator comfort



	NT 25/1 AP
TECHNICAL SPECIFICATIONS	
Vacuum width, floor tool in	11
Vacuum hose length ft	8
Power cord length ft	25
Waste container capacity gal	6.6
Operating noise level dBA	70
Air flow rate cfm	123
Waterlift in of water	88
Motor watts	1,170
Weight Ibs	24
Dimensions (LxWxH) in	20 x 14.5 x 19

PART NO. 1.184-868.0

NT 25/1 AP, 6.6 gallon wet / dry vacuum

DESCRIPTION

ACCESSORIES		
PART NO.	DESCRIPTION	
4.440-626.0	Suction hose C DN35	
■ 6.906-240.0	Crevice nozzle DN35	
6 .903-284.0	Floor tool DN35	
■ 6.900-514.0	Suction tube DN35	
■ 6.907-478.0	Set of filter bags - fleece 25L	



NT 30/1 TACT TE

This powerful vacuum cleaner picks up coarse dirt and liquids as well as large quantities of fine dust. Tact, the fully automatic cleaning system, cleans the filter with strong air blasts. It is ideal for long periods of uninterrupted use and constant high suction power.

- Blasts of air clean the filter resulting in lower maintenance costs and a longer filter life ultimately saving you money
- On-board storage for all accessories, includes two hooks for the suction hose and power cord
- Bayonet and clip connections guarantee easy and secure connection of all accessory parts onto machine
- HEPA filter is standard



NT 30/1 TACT TE

14
13
25
8.2
68
150
102
1,380
30
22 x 14.5 x 22.2

PART NO. 1.148-216.0

DESCRIPTION

NT 30/1 Tact TE , 8-gallon wet/dry vacuum with Tact

ACCESSORIES	
PART NO.	DESCRIPTION
2.889-192.0	Stainless steel vacuum tube set
2.889-135.0	Vacuum hose 13 ft
2.889-134.0	Vacuum hose 8 ft
2.889-170.0	Ergonomic bend
2.889-152.0	Wet and dry floor nozzle
2.889-159.0	Crevice nozzle
2.889-151.0	Power tool adaptor
2.889-154.0	Fleece filter bags - 30 liter
6 .907-629.0	HEPA filter

NT 40/1 TACT TE

The NT 40/1 Tact Te has the power to get the job done. Tact, the fully automatic cleaning system, cleans the filter with strong air blasts. It is ideal for long periods of uninterrupted use and constant high suction power. It is fully compliant with OSHA silica dust regulations.

- Large wheels and front swivel casters for easy maneuverability
- Drain hose allows user to empty unit directly into a drain
- Metal wand, floor tool, crevice tool and washable nylon filter are included with each NT wet / dry vacuum.
- Crush resistant hose stows conveniently on top for storage
- On-board storage for all accessories, includes two hooks for the suction hose and power cord.
- Blasts of air clean the filter resulting in lower maintenance costs and a longer filter life ultimately saving you money.





NT 40/1 TACT TE

TECHNICAL SPECIFICATIONS	
Vacuum width, floor tool in	14
Vacuum hose length ft	13
Power cord length ft	25
Waste container capacity gal	10.3
Operating noise level dBA	68
Air flow rate cfm	150
Waterlift in of water	102
Motor watts	1,380
Weight Ibs	32
Dimensions (LxWxH) in	22 x 14.5 x 25.7

PART NO.	DESCRIPTION
1.148-316.0	NT 40/1 Tact TE, 10-gallon wet/dry vacuum with Tact

ACCESSORIES	
PART NO.	DESCRIPTION
2.889-192.0	Stainless steel vacuum tube set
2.889-135.0	Vacuum hose 13 ft (Te versions)
2.889-170.0	Ergonomic bend
2.889-152.0	Wet and dry floor nozzle
2.889-159.0	Crevice nozzle
2.889-151.0	Power tool adaptor (Te versions)
2.889-155.0	Fleece filter bags
■ 6.907-629.0	HEPA filter
□ 2.643-868.0	Push handle



NT 50/1 TACT TE

The NT 50/1 Tact TE includes an improved Tact automatic filter cleaning system - improved cleaning performance and reduced noise level. It is fully compliant with OSHA silica dust regulations.

- Bayonet and clip connections guarantee easy and secure connection of all accessory parts to the vacuum
- Blasts of air clean the filter resulting in lower maintenance costs and a longer filter life ultimately saving you money.
- Wider inner diameter of vacuum hoses (1-3/8 inches) is now standard
- Even stronger and sturdier components and overall design
- Crush resistant hose stows conveniently on top for storage



NT 50/1 TACT TE

TECHNICAL SPECIFICATIONS	
Vacuum width, floor tool ir	14
Vacuum hose length f	13
Power cord length f	25
Waste container capacity ga	13.5
Operating noise level dBA	68
Air flow rate cfm	150
Waterlift in of water	102
Motor watts	: 1,380
Weight Ibs	: 40
Dimensions (LxWxH) in	22 x 14.5 x 41.1

PART NO. 1.148-416.0

DESCRIPTION

NT 50/1 Tact TE, 13.5-gallon wet/dry vacuum with Tact

ACCESSORIES

PART NO	DESCRIPTION
2.889-19	.0 Stainless steel vacuum tube set
2.889-13	.0 Vacuum hose 13 ft (Te versions)
2.889-17	.0 Ergonomic bend
2.889-15	.0 Wet and dry floor nozzle
2.889-15	.0 Crevice nozzle
2.889-15	.0 Power tool adaptor (Te versions)
2.889-15	.0 Fleece filter bags
6.907-62	.0 HEPA filter



NT 30/1, 40/1, 50/1 ACCESSORIES



PART NO.	DESCRIPTION
2.889-137.0	Vacuum hose 1-3/8 inch diameter (DN 35) 13 ft electrically conductive
2.889-136.0	Vacuum hose 1-3/8 inch diameter (DN 35) 8 ft electrically conductive
2.889-164.0	Vacuum hose 1-3/8 inch diameter (DN 35) 8 ft heat-resistant
2.889-172.0	Ergonomic bend 1-3/8 inch diameter (Dn 35) with soft grip electrically conductive
2.889-148.0	Ergonomic bend 1-3/8 inch diameter (DN 35) with soft grip and vacuum power regulation
6.907-455.0	Flat pleated filter PTFE
2.679-000.0	Drilling dust nozzle 1-3/8 inch diameter (DN 35)
2.643-868.0	Push handle for NT 40/1 Tact Te L
2.889-138.0	Vacuum hose 1-5/8 inch diameter (DN 40), 13 ft
2.889-139.0	Vacuum hose 1-5/8 inch diameter (DN 40), 8 ft
2.889-141.0	Vacuum hose 1-5/8 inch diameter (DN 40), 13 ft electrically conductive
2.889-140.0	Vacuum hose 1-5/8 inch diameter (DN 40), 13 ft oil-resistant
2.889-171.0	Ergonomic bend 1-5/8 inch diameter (DN 40), with soft grip
2.889-172.0	Ergonomic bend 1-5/8 inch diameter (DN 40), with soft grip electrically conductive
2.889-194.0	Set of vacuum tubes 1-5/8 inch diameter (DN 40), 2 x 1.8 ft, stainless steel
6.907-629.0	HEPA filter for NT 30/1, NT 40/1 and NT 50/1
5.453-042.0	(Photo 1 above) Power tool adapter, fits these size shrouds: 1.06" - 1.10" OD, 1.25" - 1.32" OD, 1.37" - 1.44" OD, 1.47" - 1.50" OD
5.453-016.0	(Photo 2 above) Power tool adapter, fits these size shrouds: 1.06" - 1.07" OD, 1.27" - 1.30" OD, 1.40" - 1.41" OD
5.407-108.0	(Photo 3 above) Power tool adapter: connects to 40mm hose connection, screws into 35mm hose or 5.453-016.0 tool adapter
2.637-217.0	(Photo 4 above) Power tool "Y" adapter
5.453-085.0	(Photo 5 above) Power tool adapter sleeve 40 x 50 mm
5.407-113.0	(Photo 6 above) Reducer, DN 40 to DN 35 hose connection
5.031-703.0	Tension ring (order with 5.407-113.0)



NT 48/1

Built to handle difficult wet or dry dirt, this vac is the machine that will stand up to tough everyday use. The optional front mounted squeegee provides even more productive water pickup. It is easy to transport from site to site with its large rear wheels and front casters as well as an easy to grip handle. The large filter provides impressive suction power and long work intervals improving your productivity.

- Mobile, all-purpose wet / dry vacuum for small to medium jobs and multiple locations
- Integrated handle ensures easy and comfortable transport
- Optional front mounted squeegee for more productive pickup



		NT 48/1			
TECHNICAL SPECIFICATIONS					
Vacuum width, floor tool	in	12	Air flow rate	cfm	142
Vacuum hose length	ft	8	Waterlift	in of water	80
Power cord length	ft	25	Motor	watts	1,380
Waste container capacity	gal	12	Weight	lbs	22
Operating noise level	dBA	72	Dimensions (LxWxH)	in	19 x 15.3 x 30.3

ART NO. 428-623.0	DESCRIPTION
	NT 48/1, 13-gallon wet/dry vacuum
.840-844.0	NT 48/1, 13-gallon wet/dry vacuum with front mounted squeegee
CCESSORIES	
PART NO.	DESCRIPTION
6.414-789.	D Cylindrical Dust Filter
6.904-285.	D Paper filter bag (5-pack, 1 bag Included with machine)
6.906-512.) All-Purpose Nozzle
6.900-385.	0 8.3-inch all purpose crevice nozzle
4.440-626.	0 8 feet x 1.375 inch hose with comfortable hand grip
6.900-514.	D Metal suction tube, 1.4 inch X 1.6 feet
6.906-240.	D Crevice nozzle, 1.4-inch
6.904-211.	D Wet Filter Bag
6.906-384.	14.6" Aluminum All-Purpose Nozzle with Height-Adjustable Cylindricals, Brush Strips and Oil Resistant Squeegees
6.907-409.	D Floor tool packaged basalt grey DN35
6.907-408.	D Floor tool packaged basalt grey DN40
6.906-383.	0 17.7" Aluminum All-Purpose Head with Height-Adjustable cylindricals, Brush Stripes and oil-resistant Squeegees
2.860-113.	D Upholstery hand tool
2.860-114.	0 10-inch turbo nozzle with reducer 35/32
6.903-033.	D 11.4" Crevice Tool
6.905-998.	D Upholstery nozzle complete NW35
6.903-034.	D Radiator Brush for use with 6.900-385.0
6.903-035.	D Plastic, Pipe Diameter 3.9"
6.903-862.	D Suction Brush, Natural Hair, Pivotable, 35 mm ID
2.860-116.	D Nozzle Set, Crevice Tool, Upholstery Tool, Round Brush, 35 mm ID
2.863-147.) All-Purpose Brush, Soft Bristles 35 mm ID
8.622-960.	D Replacement 15-inch squeegee blade

NT 68/1

Easily tackle medium to large jobs with this wet/dry vac. Designed with a robust 1.8 hp vac motor to handle any task you throw at it. If even more productivity is desired, the optional front mounted squeegee makes quick work of water recovery. Thoughtful features such as no-tipping dumping and on-board storage make this the operator's choice for wet/dry vacs.

- Optional front-mounted squeegee offers more productive water pick-up
- 18 gallon capacity offers easy mobility for medium to large jobs
- Easy to use, train and operate
- Complete with on-board tool storage compartment with safety sign storage bracket
- Self-adjusting squeegee assembly



	NT 68/1
TECHNICAL SPECIFICATIONS	
Vacuum width, floor tool in	24.5
Power cord length ft	50
Waste container capacity gal	18
Operating noise level dBA	71
Air flow rate cfm	142
Waterlift in of	80
Motor watts	1,200
Weight Ibs	64
Dimensions (LxWxH) in	35.5 x 24.5 x 37.5

PART NO.	DESCRIPTION
1.103-494.0	NT 68/1, eighteen gallon wet/dry vacuum with 24" front squeegee, with tools
1.103-495.0	NT 68/1, eighteen gallon wet/dry vacuum with 24" front squeegee
1.013-021.0	NT 68/1, eighteen gallon wet/dry vacuum with hose and wand only

ACCESSORIES

ACC	ESSURIES	
	PART NO.	DESCRIPTION
	5.731-595.0	Wet Filter for Recover™ 18
	6.414-789.0	Cylindrical Dust Filter
	6.904-285.0	Paper filter bag (5-pack, 1 bag Included with machine)
	6.900-385.0	8.3-inch all purpose crevice nozzle
	6.906-240.0	Crevice nozzle, 1.4-inch
	6.906-384.0	14.6" Aluminum All-Purpose Nozzle with Height-Adjustable Cylindricals, Brush Strips and Oil Resistant Squeegees
	6.907-409.0	Floor tool packaged basalt grey DN35
	6.903-018.0	14.6" Aluminum All-Purpose Head with Height-Adjustable Cylindricals, Brush Stripes and squeegee blades
	6.907-408.0	Floor tool packaged basalt grey DN40
	6.906-383.0	17.7" Aluminum all-purpose head with height-adjustable cylindricals, brush stripes and oil-resistant Squeegees
	2.860-113.0	Upholstery hand tool
	2.860-114.0	10-inch turbo nozzle with reducer 35/32
	6.903-033.0	11.4" Crevice Tool
	6.900-922.0	14.6" Crevice Nozzle, Metal
	6.902-154.0	Wand
	8.635-292.0	Front mount squeegee assembly
	6.906-512.0	Squeegee head



BR 35/12 C BP

Thanks to our innovative steerable scrub deck, the BR 35/12 C Bp can clean up to the wall at a 90° angle. It can also clean in reverse, or in any direction. The height-adjustable, telescoping steering column allows optimal ergonomics for any operator. The folding steering column also makes it easy to secure for transport.

- Steerable scrub deck allows for scrubbing in any direction and provides perfect scrubbing right up to the edge
- The telescoping handle adjusts to any operator's height
- Brush height is adjustable for multiple floor types
- Eco!efficiency mode increases operating time by 50%, and reduces noise by 40%





BR 35/12 C BP

TECHNICAL SPECIFICATIONS					
Cleaning path / width	in	14	Battery runtime	min	66-90
Brush type	clyindrical / disc / pad	Cylindrical	Battery charging time	hrs	1-3
Brush quantity	units	1	Battery lifetime - est charging cycle	x thousands	3
Brush diameter	in	3.8	Brush contact pressure	lbs	29
Suction bar (squeegee) width	in	18	Brush speed	rpm	700-1,050
Drive	pad-assist / traction	Brush-assist	Vac motor rating	watts	280
Solution / recovery capacity	gal	3/3	Vac motor suction	cfm	42
Theoretical / practical productivity	sq. ft / hr	11,000 / 6,600	Waterlift	in of water	32
Operating noise leve - std Eco! mode	dBA	66 / 62	Weight with batteries	lbs	77
Battery charger	shelf / on-board	On-board	Dimensions (LxWxH)	in	39 x 18 x 51

PART NO. DESCRIPTION

1.783-454.0

BR 35/12 C BP, fourteen inch scrubber with cylindrical brushes

ACC	ESSORIES	
	PART NO.	DESCRIPTION
	4.037-031.0	Cylindrical Brush, red, medium
	4.037-035.0	Squeegee blade set, standard, oil-resistant, polyurethane
	6.654-294.0	Lithium-ion battery, 21 Ah
	4.037-036.0	Cylindrical Brush, white, soft
	4.037-037.0	Cylindrical Brush, orange, high/low
	4.037-038.0	Cylindrical Brush, green, hard
	4.037-039.0	Cylindrical Brush, black, very hard
	4.762-009.0	Cylindrical Pad cylindrical shaft
	6.369-053.0	Cylindrical Pads on sleeve, yellow, soft
	6.369-047.0	Cylindrical Pads on sleeve, red, medium
	6.369-052.0	Cylindrical Pads on sleeve, green, hard
	4.037-040.0	Cylindrical microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile

BD 38/12 C BP

Think of the BD 38/12 as a 15 inch disc version of the popular BR 35/12. The design allows for the easiest driving of a walk-behind disk scrubber on the market. The squeegee follows behind the disc to ensure 100% solution pickup even through the corners.

- Agile for efficient cleaning of small and furnished areas
- Easy to use scrub right up to the wall
- Quick charging lithium-ion battery
- Very compact, light and easy to transport and roll over steps.
- Reduced operating noise level for noise sensitive areas



BD 38/12 C BP

TECHNICAL SPECIFICATIONS					
Cleaning path / width	in	15	Battery runtime	min	60-120
Brush type	clyindrical / disc / pad	Disc	Battery charging time	hrs	2-3
Brush quantity	units	1	Battery lifetime - est charging cycles	x thousands	3
Brush diameter	in	15	Brush contact pressure	lbs	35-46
Suction bar (squeegee) width	in	16	Brush speed	rpm	180 / 150
Drive	pad-assist / traction	Brush-assist	Vac motor rating	watts	280
Solution / recovery capacity	gal	3.2 / 3.2	Vac motor suction	cfm	42
Theoretical / practical productivity	sq. ft / hr	11,210 / 6,725	Waterlift	in of water	32
Operating noise leve - std / Eco! mode	dBA	65 / 62	Weight with batteries	lbs	79
Battery charger	shelf / on-board	On-board	Dimensions (LxWxH)	in	37 x 30 x 51

PART NO.

- DESCRIPTION
- 1.783-431.0

BD 38/12 C, compact scrubber with fifteen inch disc brush

ACCESS	ACCESSORIES					
PA	ART NO.	DESCRIPTION				
■ 6. ⁹	.907-151.0	Disc brush, red				
■ 6.	.654-294.0	Lithium-ion battery, 21 Ah				
■ 4.	.037-059.0	Squeegee blades, made from transparent and oil-resistant polyurethane, includes front and rear blade				
□ 6.9	.907-150.0	Pad driver plate				
□ 6.3	.369-003.0	Red disc pads, set of 5				
□ 6.3	.369-002.0	Green disc pads, medium soft, green, set of 5				
□ 6.3	.369-001.0	Black disc pads, hard, set of 5				
□ 6.9	.905-060.0	Disc microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile, set of 5				



BD 50/50 C CLASSIC BP

This economically-designed scrubber provides you all the cleaning power to take on large jobs—perfect for retail environments, schools and health care facilities.

- Three cleaning modes for any operator to get the job done right
- The slim design allows you to see in front of the scrubber easier
- Home Base kit allows for carrying essentials on the machines





BD 50/50 C CLASSIC BP

TECHNICAL SPECIFICATIONS					
Cleaning path / width	in	20	Battery charger	shelf / on-board	Shelf
Brush type	clyindrical / disc / pad	Pad	Brush contact pressure	lbs	59-62
Brush quantity	units	1	Brush speed	rpm	180
Brush diameter	in	20	Vac motor rating	watts	500
Suction bar (squeegee) width	in	33	Vac motor suction	cfm	51
Drive	pad-assist / traction	Pad-assist	Waterlift	in of water	48
Solution / recovery capacity	gal	13.2 / 13.2	Weight with batteries	lbs	306
Theoretical / practical productivity	sq. ft / hr	21,530/13,995	Dimensions (LxWxH)	in	47 x 21 x 39
Operating noise leve - std / Eco! mode	dBA	66			

PART NO. DESCRIPTION 1.127-029.0 BD 50/50 C Bp Pad and Brush Wet 1.127-030.0 BD 50/50 C Bp Pad and Brush AGM

ACCESSORIES

ACU	JESSORIES	
	PART NO.	DESCRIPTION
	4.762-534.0	Pad driver, 19 inch, features a quick-change coupling and centerlock (standard on pad driver machines)
	4.777-411.0	Curved squeegee, 33.5 inches, with caster, polyurethane
	4.905-027.0	Disc brush, soft, made of natural fibers, for cleaning and polishing
	4.905-029.0	Brush, hard black - For stubborn dirt and basic cleaning. For hard wearing surfaces.
	4.905-026.0	Disc brush, medium grit, red, for general cleaning (standard on brush machines)
	6.369-079.0	Red disc pad, 20-inch, medium soft red for cleaning all types of floors, 5-pack
	6.369-078.0	Green disc pad, 20-inch, aggressive for cleaning heavily soiled floors and for deep cleaning, 5-pack
	6.369-077.0	Black pad, 20-inch, hard, for cleaning heavily soiled floors and for deep cleaning, 5 pack
	6.369-468.0	Beige disc pad, 20-inch, light grit, for polishing and refreshing of hard and elastic smooth floor coverings, 5 pack
	6.371-146.0	Beige disc pad, 20 inch, soft, natural hair, for polishing
	4.777-401.0	Squeegee, 33.5 inch, straight, made of oil-resistant transparent polyurethane, for smooth floors
	5.035-488.0	Home Base kit (adapter and cable hook)
	6.980-077.0	Double Hook (requires 5.035-488.0)
	4.035-406.0	Home Base kit carrying case
	6.980-078.0	Mopclip (requires 5.035-488.0)
	6.980-080.0	Bottle Hook (requires 5.035-488.0)
	4.070-075.0	Universal hook
	8.641-483.0	Charger for wet batteries
	8.629-377.0	Charger for AGM batteries

Effective January 1, 2021. Prices, specifications and product descriptions subject to change without notice.

*

KAR

B 40 W BP

We built this machine to be easy to operate, safe and easy to maintain. Our Kärcher Intelligent Key (KiK) and our advanced EASY operation are some of the many reasons why the B 40 C/W family offers a full spectrum of safety and protection for operators, machines and your floors.

- 100% control of the speed of your scrub brushes allows you to balance scrubbing power, noise levels and power consumption
- Chose disc and cylindrical decks from 17 to 22 inches
- Decks can be changed quickly and without tools
- The B 40 has six different cleaning modes so you can easily adjust the machine to fit your needs



		B 40 W B100	
		B 40 W DISC	B 40 W CYLINDRICAL
TECHNICAL SPECIFICATIONS			
Cleaning path / width	in	17-20	18-22
Brush type	clyindrical / disc / pad	disc	cylindrical
Brush quantity	units	1	2
Brush diameter	in	17-20	3.75
Suction bar (squeegee) width	in	33.5	33.5
Drive	pad-assist / traction	traction	traction
Solution / recovery capacity	gal	10.6 / 10.6	10.6 / 10.6
Theoretical productivity	sq. ft / hr	17,200-21,530	18,210-23,680
Operating noise leve - std / Eco! mode	dBA	69-60	69-60
Battery charger	shelf / on-board	on-board	on-board
Brush contact pressure	lbs	135-160	80-86
Brush speed	rpm	180	1,200
Drive / vac motor rating	watts	130 / 500	130 / 500
Vac motor suction	cfm	47	47
Waterlift	in of water	48	48
Weight with batteries	lbs	307-384	307-384
Dimensions (LxWxH)	in	49 x 20.5 x 45	49 x 20.5 x 45

PART NO.	DESCRIPTION
9.841-122.0	B 40 W BP, traction drive, scrub deck sold separately, 24V/105 Ah batteries
9.841-123.0	B 40 W BP, traction drive, scrub deck sold separately, 24V/138 Ah AGM batteries
9.841-372.0	B 40 W BP, traction drive, R 55 cylindrical scrub deck, 24V/105 Ah wet batteries
9.841-373.0	B 40 W BP, traction drive, D 51 disc scrub deck, 24V/105 Ah batteries
9.841-374.0	B 40 W BP, traction drive, R 55 cylindrical scrub deck, 24V/138 Ah AGM batteries
9.841-375.0	B 40 W BP, traction drive, D 51 disc scrub deck, 24V/138 Ah AGM batteries

Effective January 1, 2021. Prices, specifications and product descriptions subject to change without notice.



B 40 C/W BP ACCESSORIES

AC	CESSORIES	
	PART NO.	DESCRIPTION
	4.777-411.0	Curved squeegee assembly, 33.5 inches, with caster, polyurethane
	5.035-488.0	Home Base kit (adapter and cable hook)
	6.980-077.0	Double hook (requires 5.035-488.0)
	5.035-344.0	Operator key, yellow
	5.035-348.0	Foreman key, gray
	4.035-369.0	Lid with tank rinsing system
	4.035-345.0	Quick fill tank system (requires 9.083-003.0)
	9.083-003.0	Hose coupling
	6.273-207.0	Squeegee blade set, oil resistant (standard w/ 4.777-411.0)
	6.273-229.0	Squeegee blade set, anti stripe oil resistant
	6.273-290.0	Squeegee blade set, for textured floors
	6.273-213.0	Squeegee blade set, EPDM
	4.777-401.0	Squeegee assembly with straight polyurethane reversible blades
	4.777-406.0	Squeegee assembly with straight EPDM blades
	4.777-416.0	Squeegee assembly with curved EPDM blades
	4.035-374.0	Home Base kit (includes mop support, mop clip and bottlehook)
	4.035-406.0	Home Base kit carrying case
	5.035-655.0	Plate mop bracket
	6.980-078.0	Mopclip (requires 5.035-488.0)
	5.035-488.0	Mop support
	5.035-656.0	Mop bracket (for mop support 5.035-655.0)
	6.980-080.0	Bottle hook (requires 5.035-488.0)
	4.035-408.0	Operator key, yellow, set of 5

SERVICES

PART NO.	DESCRIPTION			
□ 7.000-270.0	Fleet one year premium subscription	Call for pricing		

B 60 W BP

The B 60 W Bp is the walk-behind scrubber built for efficiency from the ground up. Accomplish more with the same size staff with the impressive productivity of this machine. Choose between cylindrical, disc or oscillating mechanics and various widths to suit your needs with our interchangeable scrub decks. Tailor your operation settings with our innovative KiK key system.

- 100% control of the speed of your scrub brushes allows you to balance scrubbing power, noise levels and power consumption
- Choose disc, cylindrical, or oscillating decks from 22-26 inches
- Each can be changed quickly and without tools



		B 60 W + R 55	B 60 W + D 55	B 60 W + R 65	B 60 W + D 65	B 60 W + S 65
		B 00 W + h 33	D 00 W + D 33	D 00 W + N 05	B 00 W + D 05	D 00 W + 3 03
TECHNICAL SPECIFICATIONS						
Cleaning path / width	in	22	22	26	26	26
Brush type	clyindrical / disc / pad	cylindrical	disc	cylindrical	disc	oscillating
Brush quantity	units	2	1	2	2	1
Suction bar (squeegee) width	in	33.5	33.5	39	39	33.5
Drive	pad-assist / traction	traction	traction	traction	traction	traction
Solution / recovery capacity	gal	16 / 16	16 / 16	16 / 16	16 /16	16 /16
Theoretical / practical productivity	sq. ft / hr	23,680 / 15,390	23,680 / 15,390	27,980 / 18,180	27,980 / 18,180	23,680 / 15,390
Operating noise level	dBA	66-61	66-61	66-61	66-61	66-61
Battery charger	shelf / on-board	on-board	on-board	on-board	on-board	on-board
Brush contact pressure	lbs	193	92	193	95	78
Brush speed	rpm	600-1300	180	600-1300	180	2000
Drive / vac motor rating	watts	300 / 580	300 / 580	300 / 580	300 / 580	300 / 580
Vac motor suction	cfm	47	47	47	47	47
Waterlift	in of water	67	67	67	67	67
Weight with batteries	lbs	400	360	425	400	430
Dimensions (LxWxH)	in	59 x 26 x 45	58 x 26 x 45	60 x 29 x 45	60 x 29 x 45	57 x 28 x 45

PART NO.	DESCRIPTION
9.841-171.0	B 60 W BP, scrub deck sold separately, 24V/245 Ah wet batteries, on-board charger
9.841-181.0	B 60 W BP, scrub deck sold separately, 24V/230 Ah AGM batteries, on-board charger
9.841-386.0	B 60 W BP, D 65 disc scrub deck, 24V/245 Ah wet batteries
9.841-387.0	B 60 W BP, D 65 disc scrub deck, 24V/230 Ah AGM batteries
9.841-172.0	B 60 W BP, R 65 cylindrical scrub deck, 24V/245 Ah batteries, on-boardcharger
9.841-173.0	B 60 W BP, R 65 cylindrical scrub deck, 24V/230 Ah AGM batteries, on-board charger
9.841-174.0	B 60 W BP, S 65 oscillating scrub deck, 24V/245 Ah batteries, on-board charger
9.841-175.0	B 60 W BP, S 65 oscillating scrub deck, 24V/230 Ah AGM batteries, on-board charger



B 60 W BP ACCESSORIES

ACC	ACCESSORIES		
	PART NO.	DESCRIPTION	
•	4.777-080.0	Squeegee assembly, 37-inch, V-shaped polyurethane oil-resistant blades, standard on machines with R 65 & D 65 scrub decks	
	5.035-488.0	Home Base kit (adapter and cable hook)	
•	6.980-077.0	Double hook (requires 5.035-488.0)	
	4.035-386.0	Lid with tank rinsing system	
	4.035-345.0	Quick fill tank system (requires 9.083-003.0)	
	9.083-003.0	Hose coupling	
	6.273-214.0	Squeegee blade set, blue EPDM	
	6.273-208.0	Squeegee blade set, oil resistant (standard w/ 4.777-412.0)	
	6.273-205.0	Squeegee blade set, anti stripe oil resistant	
	6.273-291.0	Squeegee blade set, for textured floors	
	4.035-472.0	New connection element for cylindrical brush heads, B 60 W	
	4.035-473.0	Accessory kit to use on B 60 head	
	4.035-408.0	КІК Кеу	

SEF	SERVICES			
	PART NO.	DESCRIPTION		
	7.000-270.0	Fleet one year premium subscription	Call for pricing	

B 80 W BP

The B 80 W BP scrubbers cover a lot of area quickly, but are still easily maneuverable. They feature a robust, interchangeable, maintenance-friendly scrub deck. Choose from cylindrical or disc in 22", 26", or 30" widths. Kärcher Fleet comes pre-installed on this machine to provide you with complete visibility of your machine.

- Decks automatically raise and lower as necessary
- Interchangeable decks can be changed quickly and without tools
- Easily select your cleaning mode with the easy-to-read symbols on the large 4-color display





		B 80 W + R 65	B 80 W + R 75	B 80 W + D 65	B 80 W + D 75
TECHNICAL SPECIFICATIONS					
Cleaning path / width	in	26	30	26	30
Brush type c	lyindrical / disc / pad	cylindrical	cylindrical	disc	disc
Brush quantity	units	2	2	2	2
Suction bar (squeegee) width	in	39	39	39	39
Drive	pad-assist / traction	traction	traction	traction	traction
Solution / recovery capacity	gal	21 / 21	21 / 21	21 / 21	21 / 21
Theoretical / practical productivity	sq. ft / hr	27,980 / 18,180	32,290 / 21,000	27,980 / 18,180	32,290 / 21,000
Operating noise level	dBA	69 - 66	69 - 66	69 - 66	69 - 66
Battery charger	shelf / on-board	on-board	on-board	on-board	on-board
Brush contact pressure	lbs	213	213	117	136
Brush speed	rpm	400-1,550	400-1,550	180	180
Drive / vac motor rating	watts	350 / 580	350 / 580	350 / 580	350 / 580
Vac motor suction	cfm	53	53	53	53
Waterlift	in of water	67	67	67	67
Weight with batteries	lbs	282 / 617	284 / 617	289 / 617	293 / 617
Dimensions (LxWxH)	in	61 x 29 x 45	61 x 32 x 45	62 x 29 x 45	64 x 32 x 45

PART NO.	DESCRIPTION
9.841-197.0	B 80 W Bp, scrub deck sold separately, 24V/225 Ah wet batteries, on-board charger, with curved squeegee
9.841-202.0	B 80 W Bp, scrub deck sold separately, 24V/260 Ah wet batteries, on-board charger, with curved squeegee
9.841-196.0	B 80 W Bp, D 65 disc scrub deck, batteries and charger sold separately, with curved squeegee
9.841-195.0	B 80 W Bp, R 65 cylindrical scrub deck, batteries and charger sold separately, with curved squeegee
9.841-199.0	B 80 W Bp, Scrub deck sold separately, 24V/255 Ah AGM batteries, on-board charger, with curved squeegee
9.841-388.0	B 80 W Bp, D 65 disc scrub deck, 24V/225 Ah wet batteries
9.841-204.0	B 80 W Bp, D 65 disc scrub deck, 24V/260 Ah wet batteries, with curved squeegee
9.841-198.0	B 80 W Bp, R 65 cylindrical scrub deck, 24V/225 Ah wet batteries, on-board charger, with curved squeegee
9.841-200.0	B 80 W Bp, R 65 cylindrical scrub deck, 24V/255 Ah AGM batteries, on-board charger, with curved squeegee
9.841-201.0	B 80 W Bp, D 65 disc scrub deck, 24V/255 Ah AGM batteries, on-board charger, with curved squeegee
9.841-203.0	B 80 W Bp, R 65 cylindrical scrub deck, 24V/260 Ah wet batteries, on-board charger, with curved squeegee



B 80 W BP ACCESSORIES

ACC	ACCESSORIES			
	PART NO.	PART NO. DESCRIPTION		
•	4.777-080.0	Squeegee assembly, 39-inch, v-shaped polyurethane oil-resistant blades, standard on machines with R 75 & D 75 scrub decks		
■ 5.035-488.0 Home Base kit (adapter and cable hook)				
•	6.980-077.0	Double hook (requires 5.035-488.0)		
	8.600-251.0	Cable asm, bat. Jumper x 15" (required w/ no battery units)		
	4.035-345.0	Quick fill tank system (requires 9.083-003.0)		
	9.083-003.0	Hose coupling		
	6.273-205.0	Squeegee blade set, anti stripe oil resistant		
	6.273-291.0	Squeegee blade set, for textured floors		
	4.035-408.0	KIK Key		

SEF	SERVICES		
PART NO. DESCRIPTION		DESCRIPTION	
	7.000-270.0	Fleet one year premium subscription	Call for pricing

6.369-003.0	Pad red, medium-soft (standard), set of 5	
 8.663-291.0	Battery 6V/190 Ah AGM (standard with 9.841-467.0) (4 REQUIRED)	
8.622-835.0	Battery 6V/185 Ah wet (standard with 9.841-466.0) (4 REQUIRED)	
8.643-374.0	Shelf charger for 190Ah AGM batteries	
8.644-222.0	Shelf charger for 185Ah Wet batteries	
4.777-108.0	Squeegee, 1030mm (standard w/suction blades)	
4.037-144.0	Suction blades, 1030mm, blue (standard)	
6.371-341.0	Pad, white, soft	
6.369-002.0	Pad, green, medium-hard, set of 5	
6.371-001.0	Pad, black, hard	
2.639-290.0	Surface preparation pad, brown, hard	
6.371-021.0	Melamine pad, white/grey	
4.905-010.0	Disc brush, red, medium	
4.905-013.0	Disc brush, black, hard	
4.905-012.0	Disc brush, natural, soft	
4.905-011.0	Disc brush, white, very soft	
4.037-145.0	Suction blades, 1030 mm (polyurethane)	
4.181-011.0	Suction blades,1030 mm (linatex)	
9.753-088.0	Squeegee transport plate	
2.644-140.0	Warning beacon add-on kit	

ACCESSORIES PART NO. DESCRIPTION

lbs 512 wet / 556 AGM in $57 \times 30 \times 42$ DESCRIPTION BD 70/75 W Bp Classic, 185 Ah wet batteries, shelf charger BD 70/75 W Bp Classic, 190 Ah AGM batteries, shelf charger

4.762-590.0

■ Included □ Optional

Weight with batteries Dimensions (LxWxH) PART NO. 9.841-466.0 9.841-467.0

in 28

pad

clyindrical/disc/pad

Pad drive board STRONG (standard)

Brush quantity	units	2
Brush diameter	in	14
Suction bar (squeegee) width	in	41
Drive	pad-assist/traction	traction
Solution/recovery capacity	gal	19.8 / 19.8
Theoretical/practical productivity	sq. ft/hr	30,645 / 19,920
Operating noise level	dBA	63
Battery charger	shelf/on board	shelf
Brush contact pressure	lbs	66 - 150
Brush speed	rpm	180
Vac motor rating	watts	500
Vac motor suction	cfm	51
Waterlift	in of water	64
Weight with betteries	lhe	E10 wet / EEG AC

Wet and AGM battery options are available

This economically-designed scrubber provides you all the


Adaptable to specific floor type cleaning needs

cleaning power to take on large jobs-perfect for retail environments, grocery stores, municipalities, and BSC's.



TECHNICAL SPECIFICATIONS **Cleaning path/width**

Brush type

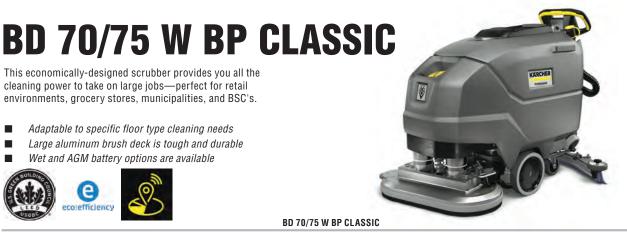

FLOOR CARE / SCRUBBERS



BD 80/100 W BP CLASSIC

This economically-designed scrubber provides you all the cleaning power to take on large jobs—perfect for retail environments, grocery stores, and BSCs.

- Storage compartment in the back for shelf charger and other accessories
- Perfect recovery in 180 degree turns.
- An automatic brake is integrated into the transaxle and a cost effective, large aluminum brush deck is included.



BD 80/100 W BP CLASSIC

TECHNICAL SPECIFICATIONS		
Cleaning path/width	in	32
Brush type	clyindrical/disc/pad	pad
Brush quantity	units	2
Brush diameter	in	16
Suction bar (squeegee) width	in	46
Drive	pad-assist/traction	traction
Solution/recovery capacity	gal	26.4 / 26.4
Theoretical/practical productivity	sq. ft/hr	35,025 / 22,770
Operating noise level	dBA	63
Battery charger	shelf/on board	shelf
Brush contact pressure	lbs	88 - 200
Brush speed	rpm	180
Vac motor rating	watts	600
Vac motor suction	cfm	53
Waterlift	in of water	67
Weight with batteries	lbs	705
Dimensions (LxWxH)	in	59 x 33 x 42

PART NO. 9.841-456.0 9.841-457.0 DESCRIPTION BD 80/100 W Bp Classic, 295 Ah wet batteries, shelf charger

BD 80/100 W Bp Classic, 285 Ah AGM batteries, shelf charger

ACC	ACCESSORIES		
	PART NO.	DESCRIPTION	
•	4.762-591.0	Pad drive board	
•	6.371-332.0	Pad, red, medium-soft	
•	8.629-184.0	Battery, Discover 6V/285 Ah AGM	
	8.622-837.0	Battery, Trojan 6V/271 Ah wet	
•	8.643-373.0	Shelf charger for wet batteries	
	8.643-374.0	Shelf charger for AGM batteries	
•	4.777-102.0	Squeegee, 1100 mm	
	4.037-138.0	Suction blades, 1230 mm, blue	
	6.371-331.0	Pad, white, soft	
	6.371-333.0	Pad, green, medium-hard	
	6.371-334.0	Pad, black, hard	
	2.639-258.0	Surface preparation pad, brown, hard	

ACC	ACCESSORIES		
	PART NO.	DESCRIPTION	
	6.371-022.0	Melamine pad, white/grey	
	4.905-000.0	Disc brush, red, medium	
	4.905-032.0	Disc brush, black, hard	
	4.905-031.0	Disc brush, natural, soft	
	4.905-030.0	Disc brush, white, very soft	
	4.037-140.0	Suction blades 1230 mm, transparent	
	9.753-088.0	Squeegee transport plate	
	2.644-140.0	Warning beacon add-on kit	

B 150 R BP

The B 150 R can cover up to 58,125 ft²/hr making this one impressively productive scrubber. Although it can cover large areas quickly, we made sure that it has great visibility for safety. Our KIK operating system and the color coded controls make operation simple and intuitive. KIK allows managers to control what functions and settings their employees can use and adjust.

- Clean ramps with grades up to 18%
- Features a unique all-wheel brake system for safety
- Utilize the large color LCD screen to adjust everything to your needs including contact pressure, water volume, brush speed, etc.
- Auto tank-rinsing and auto-fill come standard to allow the operator to do other tasks while rinse and fill are taking place





		B 150 R + R 75	B 150 R + D 75	B 150 R + R 90	B 150 R + D 90
TECHNICAL SPECIFICATIONS					
Cleaning path / width	in	30	30	35	35
Brush type	clyindrical / disc / pad	cylindrical	disc	cylindrical	disc
Brush quantity	units	2	2	2	2
Brush diameter	in	3.5	7.5	3.5	17.7
Suction bar (squeegee) width	in	37	37	42	42
Drive	pad-assist / traction	traction	traction	traction	traction
Solution / recovery capacity	gal	40 / 40	40 / 40	40 / 40	40 / 40
Theoretical / practical productivity	sq. ft / hr	48,438 / 31,485	48,438 / 31,485	58,125 / 37,780	58,125 / 37,780
Operating noise level - std / Eco! mode	dBA	67 / 64	67 / 64	67 / 64	67 / 64
Battery charger	shelf / on-board	shelf	shelf	shelf	shelf
Brush contact pressure	lbs	245	224	275	238
Brush speed	rpm	1,200	140	1,200	140
Drive / vac motor rating	watts	600 / 750	600 / 750	600 / 750	600 / 750
Vac motor suction	cfm	55	55	55	55
Waterlift	in of water	72	72	72	72
Weight without batteries	lbs	959-1,146	959-1,146	959-1,146	959-1,146
Dimensions (LxWxH)	in	65 x 31 x 56			
Minimum turning radius	ft	2.9	2.9	2.9	2.9
Climbing ability - maximum slope	% grade	10	10	10	10
Max working speed working	mph	3.7	3.7	3.7	3.7

B 150 R BP EQUIPMENT & ACCESSORIES

PART NO.	DESCRIPTION
9.841-286.0	B 150 R Bp, scrub deck sold separately, 36V/360 Ah batteries
9.841-287.0	B 150 R Bp 2SB, scrub deck sold separately, 36V/360 Ah batteries, dual side brushes
9.841-288.0	B 150 R Bp ADV, scrub deck sold separately, 36V/360 Ah batteries
9.841-289.0	B 150 R Bp 2SB ADV, scrub deck sold separately, 36V/360 Ah batteries, dual side brushes
9.841-290.0	B 150 R Bp, R 75 cylindrical scrub deck, 36V/360 Ah batteries
9.841-291.0	B 150 R Bp, R 75 cylindrical scrub deck, 36V/312 Ah AGM batteries
9.841-294.0	B 150 R Bp 2SB, R 75 cylindrical scrub deck, 36V/360 Ah batteries, dual side brushes.
9.841-295.0	B 150 R Bp 2SB, R 75 cylindrical scrub deck, 36V/312 Ah AGM batteries, dual side brushes.
9.841-292.0	B 150 R Bp, R 90 cylindrical scrub deck, 36V/360 Ah batteries.
9.841-293.0	B 150 R Bp, R 90 cylindrical scrub deck, 36V/312 Ah AGM batteries.
9.841-296.0	B 150 R Bp 2SB, R 90 cylindrical scrub deck, 36V/360 Ah batteries, dual side brushes.
9.841-297.0	B 150 R Bp 2SB, R 90 cylindrical scrub deck, 36V/312 Ah AGM batteries, dual side brushes.
9.841-367.0	B 150 R Bp, Scrub deck sold separately, 36V/312 Ah AGM batteries
9.841-368.0	B 150 R Bp 2SB, scrub deck sold separately, 36V/312 Ah AGM batteries, dual side brushes
9.841-365.0	B 150 R Bp ADV, scrub deck sold separately, 36V/312 Ah AGM batteries
9.841-366.0	B 150 R Bp 2SB ADV, scrub deck sold separately, 36V/312 Ah AGM batteries, dual side brushes

ACC	ACCESSORIES			
	PART NO.	DESCRIPTION		
	4.777-4120	Squeegee assembly, 37-inch, v-shaped polyurethane oil-resistant blades, standard on machines with R 75 & D 75 scrub decks		
	4.777-413.0 Squeegee assembly, 42-inch, curved polyurethane oil-resistant blades, standard on machines with R 90 & D 90 scrub decks			
•	8.622-842.0	6V/360 Ah wet batteries		
	8.629-184.0	Battery, 6V/312 Ah AGM battery		
•	8.628-408.0	Battery charger, 36V, 36A, 115V. For use with 8.622-842.0		
	8.600-015.0	AGM battery charger, 36V, 21A, 115V		
	2.642-058.0	Spray Suction Kit - for Cleaning Areas Not Easily Accessed by Machine (field installation required)		
	6.435-733.0	Non-marking rear wheel, for use on sensitive floors that mark easily (field installation required)		
	4.444-015.0	Suction hose accessories, for taking in water from corners (e.g. deep freezers)		
□ 4.035-516.0 360° Warning Beacon (field installation required) □ 4.777-402.0 37-inch straight squeegee assembly, for machines with R 75 scrub deck		360° Warning Beacon (field installation required)		
		37-inch straight squeegee assembly, for machines with R 75 scrub deck		
	4.777-403.0	42-inch straight squeegee assembly, for machines with R 90 scrub deck		
	6.273-215.0	Blue squeegee blade (2 required)		
	6.273-209.0	Brown, oil-resistant squeegee blade		
	6.273-206.0	Brown, streak-free, oil-resistant squeegee blade		
	2.641-811.0	Cleaning agent dosing system DS 3 - Can be directly connected to the main water supply; the fresh water tank is filled with the mixture of water and cleaning agent. Also in connection with the ABS filling system.		
	6.435-810.0	Front tires, traction - with V profile and tire compound with especially good traction properties. Oil-proof.		
	6.951-073.0	Replacement side broom, for use with R-type scrub decks (1-pack)		

SE	RVICES		
	PART NO.	DESCRIPTION	
	7.000-270.0	Fleet one year premium subscription	Call for pricing

בוקן



CLEANING HEADS FOR B SERIES SCRUBBERS

We offer three different scrub decks to suit your unique needs. The three types R (cylindrical), D (disc) or S (vibration) each have their specific advantages. Disc decks are ideal for everyday scrubbing. Cylindrical heads are ideal for stubborn dirt or uneven surfaces. The S heads are very efficient at stripping of floors. No matter your need, Kärcher has you covered.



Disc Heads



R-Series

Cylindrical Heads



S-Series Vibration Heads

D 43 17-INCH DISC SCRUB DECK					
PART NO.	DESCRIPTION	B 40	B 60	B 80	B 150
2.763-023.0	D 43 head, 17-inch scrub deck for all battery-powered B 40 units				
4.762-533.0	Pad driver				
6.905-526.0	Disc microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile				
4.905-023.0	Disc brush, natural fibers				
6.369-470.0	Disc pad, red (general purpose/standard)				
4.905-022.0	Red disc brush, 17-inch				
4.905-024.0	Disc brush, white 17-inch	•			
4.905-025.0	Disc brush, black 17-inch				
6.369-472.0	Disc pad green (aggressive)	•			
6.369-473.0	Disc pad black (very aggressive)				
6.369-469.0	Disc pad white (soft)				
6.371-081.0	Disc pad beige (light aggregate)				
6.371-149.0	Disc pad, natural				

D 51 20-INCH	D 51 20-INCH DISC SCRUB DECK				
PART NO.	DESCRIPTION	B 40	B 60	B 80	B 150
2.763-026.0	D 51 head, 20" / 510mm Scrub Deck for all Battery-Powered B 40 units				
8.642-710.0	One time conversion kit, D 51 orbital head (for serial # 10358 and higher)*				
8.638-801.0	Assembly, Deck, D 51 orbital (replacement deck assembly)				
4.905-026.0	Disc brush, medium grit, red, for general cleaning (standard on brush machines)				
4.905-028.0	Disc brush, very soft, for cleaning sensitive floors and polishing, white				
4.905-029.0	Disc brush, hard, for stubborn dirt and deep cleaning. Only for hard-wearing surfaces, black				
4.905-027.0	Disc brush, soft, made of natural fibers, for cleaning and polishing				
4.762-534.0	Pad driver, 19 inch, features a quick-change coupling and centerlock (standard on pad driver machines)				
6.371-271.0	Disc microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile				
6.369-079.0	Red disc pad, 20-inch, medium soft red for cleaning all types of floors, 5-pack				
6.369-078.0	Green disc pad, 20-inch, aggressive for cleaning heavily soiled floors and for deep cleaning, 5-pack				
6.369-077.0	Black pad, 20-inch, hard, for cleaning heavily soiled floors and for deep cleaning, 5 pack				
6.369-468.0	Beige disc pad, 20-inch, light grit, for polishing and refreshing of hard and elastic smooth floor coverings, 5 pack				
6.371-146.0	Beige disc pad, 20 inch, soft, natural hair, for polishing				

D 55 22-INCH	DISC SCRUB DECK				
PART NO.	DESCRIPTION	B 40	B 60	B 80	B 150
2.763-001.0	D 55 brush head, disc head, 22-inch				
4.905-015.0	Disc brush, white - soft				
4.905-016.0	Disc brush, natural bristles		•		
4.905-014.0	Disc brush, red, standard with D 55 head				
4.905-017.0	Disc brush, black - very aggressive		•		
4.762-445.0	Pad driver				
6.371-153.0	Disc pad, red (soft)		•		
6.371-154.0	Disc pad, green (medium)				
6.371-155.0	Disc pad, black (hard)		•		



CLEANING HEADS FOR B SERIES SCRUBBERS

D 65 26-INCH	D 65 26-INCH DISC SCRUB DECK					
PART NO.	DESCRIPTION	B 40	B 60	B 80	B 150	
2.763-003.0	D 65 brush head, disc head, 26-inch					
4.905-011.0	Disc brush, white - soft					
4.905-012.0	Disc brush, natural bristles		•			
4.905-010.0	Disc brush, red, standard with D 65 head					
4.905-013.0	Disc brush, black - very aggressive		•			
4.762-446.0	Pad driver					
6.369-003.0	Red disc pads, set of 5					
6.369-002.0	Green disc pads, medium soft, green, set of 5					
6.369-001.0	Black disc pads, hard, set of 5					
6.369-959.0	Disc microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile					

DADT NO	PEODINTION	D 10	B 00	B 00	B 450
PART NO.	DESCRIPTION	B 40	B 60	B 80	B 150
2.763-005.0	D 75 brush head, disc head, 30-inch				
4.905-019.0	Disc brush, white - soft				
4.905-020.0	Disc brush, natural bristles				
4.905-018.0	Disc brush, red, standard with D 75 head				
4.905-021.0	Disc brush, black - very aggressive				
4.762-447.0	Pad driver				
6.369-791.0	Disc pad, red (soft)				
6.369-790.0	Disc pad, green (medium)				
6.369-789.0	Disc pad, black (hard)				
6.371-078.0	Disc microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile				

D 90 36-INCH DISC SCRUB DECK							
PART NO.	DESCRIPTION	B 40	B 60	B 80	B 150		
2.763-008.0	D 90 brush head, disc, 36-inch						
4.905-003.0	Disc brush, red, standard with D 90 head						
4.905-004.0	Disc brush, natural bristles						
4.905-005.0	Disc brush, white - soft						
4.905-006.0	Disc brush, black - very aggressive						
4.762-493.0	Pad driver						
6.369-022.0	Disc pad, black - hard						
6.369-023.0	Disc pad, green - medium						
6.369-024.0	Disc pad, red - soft						

R 45 18-INCH	CYLINDRICAL SCRUB DECK				
PART NO.	DESCRIPTION	B 40	B 60	B 80	B 150
2.763-020.0	R 45 head, 18-inch scrub deck for non-traction drive machines (for C Units)				
2.763-019.0	R 45 head, 18-inch scrub deck for traction drive machines (for W Units)				
4.762-392.0	Cylindrical red brush, medium stiff bristles for all-around cleaning on smooth and textured floors				
4.762-405.0	Cylindrical white brush, soft bristles for gentle cleaning on all-surface floors				
4.762-406.0	Cylindrical orange brush, high-low bristles for cleaning all grouted surface floors				
4.762-407.0	Cylindrical green brush, stiff bristles for aggressive cleaning on irregular surface floors				
4.762-408.0	Cylindrical black brush, extremely stiff bristles for stubborn dirt on rugged floors				
4.762-413.0	Cylindrical pad shaft (required for all brushes below)				
4.114-009.0	Cylindrical microfiber pad, for daily cleaning of delicate surfaces including LVT and stone tile				
6.367-105.0	Cylindrical pad, yellow (soft)				
6.367-107.0	Cylindrical pads, red, general purpose				
6.367-108.0	Cylindrical pad, white, (very soft) for high-gloss floors				
6.367-106.0	Cylindrical pad, green (hard & aggressive)				

CLEANING HEADS & BRUSHES

R 55 | 22-INCH CYLINDRICAL SCRUB DECK

П

PART NO.	DESCRIPTION	B 40	B 60	B 80	B 150
2.763-013.0	R 55 head, 22-inch scrub deck for non-traction drive machines (for B 40 C units)				
2.763-011.0	R 55 head, 22-inch scrub deck for traction drive machines (for B 40 W, B 60 & B 90 units)				
4.035-184.0	Roller brush complete for replacement BR				
4.762-409.0	Cylindrical white brush, 22-inch, soft				
4.762-410.0	Cylindrical orange brush, 22-inch, high/low bristles for uneven floors	•			
4.762-411.0	Cylindrical green brush, 22-inch, hard bristles				
4.762-412.0	Cylindrical brush black 22-inch				
4.762-415.0	Cylindrical pad shaft, 22-inch, 2 required				
8.635-692.0	Cylindrical, stripping 22-inch				
4.114-010.0	Cylindrical microfiber pad, 22-inch, for daily cleaning of delicate surfaces including LVT and stone tile				
6.369-732.0	Yellow pad, 22-inch				
6.369-734.0	Red pad, 22-inch, medium grit for all-around cleaning on smooth and textured floors				
6.369-735.0	White pad, includes sleeve, 22-inch				
6.369-733.0	Green pad, 22-inch				
2.763-002.0	R 55 head, cylindrical, 22-inch				
6.906-977.0	Cylindrical brush, white, soft				
4.035-193.0	Roller brush red for replacement BR 55				
6.906-978.0	Cylindrical brush, orange, hi-lo grout brush				
6.906-979.0	Cylindrical brush, green, hard				
6.906-980.0	Cylindrical brush, black, very aggressive				
8.635-692.0	Cylindrical, stripping 22-inch				
4.762-432.0	Cylindrical brush, red (2 required)				
6.369-389.0	White cylindrical pad, extra soft, set of 20				
6.369-454.0	Yellow cylindrical pad, soft, set of 20				
6.369-455.0	Green cylindrical pad, hard, set of 20				

R 65 | 26-INCH CYLINDRICAL SCRUB DECK PART NO. DESCRIPTION B 40 B 60 B 80 B 150 2.763-004.0 R 65 brush head, cylindrical, 26-inch 6.906-981.0 Cylindrical white brush, soft 4.035-187.0 Roller brush red for replacement BR65 6.906-982.0 Cylindrical orange brush, high-low for grout Cylindrical green brush, hard 6.906-983.0 6.906-984.0 Cylindrical black brush, very aggressive 4.762-433.0 Cylindrical Pad Shaft 6.369-389.0 White cylindrical pad, extra soft, set of 20 6.369-454.0 Yellow cylindrical pad, soft, set of 20 6.369-455.0 Green cylindrical pad, hard, set of 20 6.369-456.0 Red cylindrical pad, medium, set of 20

R 75 30-INCH	CYLINDRICAL SCRUB DECK				
PART NO.	DESCRIPTION	B 40	B 60	B 80	B 150
2.763-006.0	R 75 brush head, cylindrical, 30-inch				
6.906-985.0	Cylindrical brush, white, soft				
4.035-190.0	Roller brush red for replacement BR 75				
6.906-986.0	Cylindrical brush, orange, hi-lo grout brush				
6.906-987.0	Cylindrical brush, green, hard				
6.906-988.0	Cylindrical brush, black, very aggressive				
4.762-434.0	Cylindrical pad shaft				
6.369-389.0	White cylindrical pad, extra soft, set of 20				
6.369-454.0	Yellow cylindrical pad, soft, set of 20				
6.369-455.0	Green cylindrical pad, hard, set of 20				
6.369-456.0	Red cylindrical pad, medium, set of 20				



CLEANING HEADS & BRUSHES

R 90 36-INCH CYLINDRICAL SCRUB DECK						
PART NO.	DESCRIPTION	B 40	B 60	B 80	B 150	
2.763-007.0	R 90 brush head, cylindrical, 36-inch					
6.906-989.0	Cylindrical white brush, soft, 36-inch					
6.907-377.0	Cylindrical red brush, 36-inch					
6.906-990.0	Cylindrical orange brush, high-low for grout, 36-inch					
6.906-991.0	Cylindrical green brush, hard, 36-inch					
6.906-992.0	Cylindrical black brush, very aggressive, 36-inch					
4.762-189.0	Cylindrical pad shaft				•	
6.369-389.0	White cylindrical pad, extra soft, set of 20					
6.369-454.0	Yellow cylindrical pad, soft, set of 20					
6.369-455.0	Green cylindrical pad, hard, set of 20					
6.369-456.0	Red cylindrical pad, medium, set of 20					

S 65 26-INCH	S 65 26-INCH VIBRATION SCRUB DECK					
PART NO.	DESCRIPTION	B 40	B 60	B 80	B 150	
2.763-030.0	S 65 brush head, oscillating scrub deck, 26-inch					
4.036-063.0	S 65 orbital head connection kit, required for connecting S 65 orbital, B 60 and B 80 units (required)					
4.036-061.0	S 65 orbital head connection kit, required for connecting S 65 orbital, B 90 units (required)			•		
8.635-789.0	Pad, S 65 surface prep, package of 5					
8.635-788.0	Pad, S 65, red, package of 5					
8.635-836.0	Pad, S 65, white, package of 5					

The BDS 51/175 C floor machine is a high quality, durable unit that offers power and versatility for scrubbing and stripping. It features an adjustable handle to accommodate various user heights and five inch non-marking wheels to allow easy transportation. This machine is available in single-speed or dual-speed.

- Robust motor for everyday reliability
- Separate start and run capacitors for durability
- Cord strain relief to keep cord from breaking or tearing
- Strong and solid handle housing for trouble free operation





	BDS 51/175 C
in	20
rpm	175
t / hr	2,222
dBA	63
V	115
hp	1.5
in	5 x 1.25
ft	50
lbs	118
in	24.5 x 21 x 47
t	rpm / hr dBA V hp in ft Ibs

PART NO.

DESCRIPTION

1.009-095.0

BDS 51/175 C, twenty-inch

ACO	ACCESSORIES					
	PART NO.	DESCRIPTION				
	8.628-430.0	Pad driver, 20-inch with clutch plate				
	8.600-062.0	Solution tank 4 gallon				
	8.600-507.0	Center lock				
	8.628-369.0	20-inch aggressive grit brush with clutch plate				
	8.628-378.0	20-inch mild grit brush with clutch plate				
	8.628-379.0	20-inch nylon polish brush with clutch plate				
	8.628-377.0	20-inch nylon scrub brush with clutch plate				
	8.628-370.0	20-inch polypropylene brush with clutch plate				
	8.625-259.0	20-inch sanding disc				



SGV 6/5

The easy-to-use SGV 6/5 steam vacuum cleaner offers hygienic cleanliness. A single machine that is a steam cleaner and wet vacuum cleaner in one. With EASY Operation switch, secure accessory integration and hand tool for controlling the steam/vacuum function.

- One easy-to-use switch controls all operation
- Self-explanatory symbols means less training required
- Our unique design allows you to refill the water while in use
- The included hand tool features an adjustment knob that allows you to adjust the water/steam regulation and turn the vacuum on and off





SGV 6/5

TECHNICAL SPECIFICATIONS		
Voltage	V	110-120
Steam temp / pressure	oF / psi	327 / 87
Tank capacity	gal	1.3
Cable length	in	24.5
Weight without accessories	lbs	86
Dimensions (LxWxH)	in	25 x 19 x 38

PART NO. 1.092-003.0 DESCRIPTION

SGV 6/5, commercial steam cleaner and wet vacuum

ACCESSORIES

ACC	ESSORIES	
	PART NO.	DESCRIPTION
•	2.863-011.0	Round brush set, 3 Brushes
•	2.889-005.0	Floor Nozzle, 12 inches
•	2.889-006.0	Brush strips for floor nozzle 2.889-005.0
	2.889-007.0	Rubber Strip, 12 inches for floor nozzle 2.889-005.0
•	2.889-008.0	Hand Nozzle
	2.889-009.0	Brush Strip, 6 inches for hand nozzle 2.889-008.0
•	2.889-010.0	Rubber Strip, 6 inches for hand nozzle 2.889-008.0
•	2.889-011.0	Adapter
•	2.889-028.0	Crevice Nozzle
•	2.889-052.0	Adapter for attaching round brushes
•	4.440-009.0	Steam suction hose
•	2.889-004.0	Extension tube set
	2.889-053.0	Triangular floor nozzle
	2.863-007.0	Round brush stainless steel (very hard bristles) set, 3 Nozzles
	2.863-008.0	Round Brass Brush (hard bristles) Set, 3 Nozzles
	2.863-009.0	Pekalon round brush (medium-hard bristles) set

SG 4/4

Time is money—particularly in commercial cleaning. The SG 4/4 steamer has an ingenious twotank filling system allowing for continuous use. Steam cleaning can impressively remove up to 99.999% of bacteria without chemical. It is also ideal for cleaning kitchens and grout.

- Our unique two-tank system allows for continuous use
- Very little time is needed to heat up the unit
- Control the level of steam
- Switch to pressurized hot water to remove stubborn dirt
- Only water is used by the SG 4/4 to save you money and to improve the health of users and guests



		SG 4/4
TECHNICAL SPECIFICATIONS		
Voltage	V	110
Steam temp / pressure	oF / psi	248 / 58
Tank capacity	gal	1.06
Cable length	in	24.5
Weight without accessories	lbs	17.6
Dimensions (LxWxH)	in	19 x 12.6 x 10.8

PART NO.	DESCRIPTION
1.092-805.0	SG 4/4, commercial steam cleaner
9.841-414.0	SG 4/4, commercial steam cleaner with transport cart

ACO	ESSORIES	
	PART NO.	DESCRIPTION
	4.322-046.0	Steam Hose
	4.127-024.0	Extension Tube
	2.884-280.0	Hand Tool
	6.906-185.0	Floor Nozzle
•	2.863-263.0	Power Nozzle Set
	2.884-281.0	Point Jet Nozzle
•	4.013-030.0	Funnel
	2.863-264.0	Round Brush Set
	2.863-025.0	Window Nozzle Special Accessories
	6.273-140.0	Wiper Blade (window)
	2.863-062.0	Wallpaper Stripper
	2.863-171.0	Steam+Clean Microfiber Cloth Set for Bathrooms (Includes 4 different clothes)
	2.863-172.0	Steam+Clean Microfiber Cloth Set for Kitchens (Includes 4 different clothes)
	2.863-173.0	Steam+Clean Microfiber Velour Floor Cloth Set (Includes 2 cloths)
	2.863-174.0	Steam+Clean Microfiber Velour Cloth Covers for the Hand Tool (Includes 2 cloths)
	6.962-097.0	Filling Funnel
	2.885-465.0	Floor Tool Replacement
	6.962-239.0	Two Wheel Transport Cart





HD 2.0/1000 DUAL MISTER & DUAL MISTER CART AN ALL-IN-ONE MISTER AND PRESSURE WASHER

HD 2.0/1000 Dual Mister and Dual Mister Cart

Kärcher's cold water, corrosion-resistant aluminum Dual Mister easily converts from a pressure washer to a mister for dispensing sanitizer or disinfectants, such as Vital Oxide[®].¹ This reliable electric powered pressure washer comes standard with a humidifying nozzle and an Easy!Valve that allows the operator to easily switch from pressure washing to misting mode. The Dual Mister Cart is easy-to-maneuver with flat-free tires, two mounted hose reels, and provides a bypass loop for additional pump protection. In short, this unit is designed to combat viruses and bacteria in directional sprayer mode, or it can be used as a high pressure washer to clean surfaces. Your choice.





HIGH PRESSURE MODE

SPRAYER MODE

TECHNICAL SPECIFICATIONS			
Pressure	psi	1000	107-480
Solution spray rate	gpm	2.0	0.023-0.06
Drive		Direct	Direct
Voltage	v	120 / 1ph	120 / 1ph
Pump	RPM	1725	1725
Amps		13.6	6.5 - 8.0
HP		1.5	1.5
Shipping Weight	lbs	161 / Cart - 285	161 / Cart - 285
Dimensions (L x W x H)	in	41 x 22 x 25 / Cart - 41 x 36 x 50	41 x 22 x 25 / Cart - 41 x 36 x 50

EQUIPMENT

NRT NO.	DESCRIPTION
06-160.0	HD 2.0/1000 Dual Mister
1.106-161.0	HD 2.0/1000 Dual Mister Cart

ACCESSORIES

	PART NO.	DESCRIPTION
	8.750-247.0*	Gun, M407 (2 for dual gun system)
	8.925-393.0*	Hose, 1/4" X 75', R1, 4000 PSI, SW X SW
	8.783-040.0	Lance, 44", zinc-plated, handle and coupler
	8.712-338.0	Nozzle, yellow, 035
•	8.712-339.0	Nozzle, green, 035
	8.712-340.0	Nozzle, white, 035
	8.929-512.0*	Misting Nozzle Assembly with 1/4" Quick Connect
	8.709-175.0	Filter High Pressure 1/4"
	8.902-421.0*	Two-Gun Tee Coupler

¹ Corrosive sanitizers or disinfectants will void the warranty.

*Must order for dual gun misting system / two gun coupler for 1.106-160.0.

ACCESSORIES

PART NO.	DESCRIPTION
8.710-620.0	Legacy Superlite stainless steel wand, 72" - 56.0
9.807-750.0	37.5" long handle
9.807-753.0	Lance holder
9.807-752.0	Hose storage hook
9.807-751.0	Handle with hose reel (mild steel anthracite handle)
9.802-166.0*	3/8" Socket, Female, Brass
9.802-169.0*	3/8" Socket, Male, Brass
8.707-140.0*	1/4" Nipple, Male, Stainless Steel
8.707-144.0*	3/8" Nipple, Female, Stainless Steel



PS 4/7 BP MISTER vital oxide® hospital disinfectant

PS 4/7 Bp Mister

Achieve a higher level of efficacy with the Kärcher PS 4/7 Bp Mister. This hospital-grade misting system is specifically designed for use with Vital Oxide[®] disinfectant. Reduce the risks of Health Care Acquired Infections by killing virus, bacteria and mold faster, safer and quieter.

PS 4/7 Electrostatic Sprayer

NEW – our Electrostatic PS 4/7 sprayer adds the static charge to the particles to allow them to "wrap around" objects and provide even better coverage.

Vital Oxide

- No rinse sanitizer for food contact surfaces (D2).
- Kills harmful bacteria, mold and mildew, deodorizes and eliminates allergens
- Registered as a carpet disinfectant and recognized by CRI to be safe on carpets. EPA Reg. No. 82972-1 EPA Est. No. 85804-NC-1 EPA Est. No. 29909-CA-1 (See batch code for actual (establishment number)
- Represented in Canada by Halifax International Trading Inc. S1394 Pineway Court, Oakville Ontario L6M 2H3 (DIN 24422654)

TANT	-	
у		
to		
s.	KARCHER	VitelÖxide VitelÖxide
0		

		PS 4/7 BP OBC MISTER	PS 4/7 ELECTROSTATIC SPRAYER
TECHNICAL SPECIFICATIONS			
Pressure	psi	100	100
Solution spray rate	gpm	0.05	0.05
Chemical Tank	gal	1	1
Continuous spray on one battery charge	hrs	8	8
Voltage	٧	12	12
Wheels	in	3	3
Compact height for storage/transport	in	20	20
Sound level	dBA	45	45
Continuous spray time (electrostatic)	hrs	N/A	40
Lithium battery	v	N/A	3.6, AA size
Weight (including battery)	lbs	40	40
Dimensions (L x W x H)	in	20 x 15 x 38	20 x 15 x 38

EQUIPMENT

PART NO.	DESCRIPTION
1.007-084.0	PS 4/7 Bp OBC, mister
1.007-090.0	PS 4/7 Electrostatic sprayer with lithium battery
ACCESSORIES	

PART NO.	DESCRIPTION	
8.639-048.0	Charger	
8.637-980.0	12V AGM battery	
8.704-694.0	Chemical pail pump	
8.644-738.0	Electrostatic sprayer kit (to be retrofitted on previously purchased PS 4/7 machines)	

DETERGENTS

	PART NO.	DESCRIPTION		
	8.698-112.0	Vitaloxide [®] 55 Gal (US Only)		
	8.756-449.0	Vitaloxide [®] 55 Gal (Can Only)		
	8.642-823.0	Vitaloxide® 15 Gal (US Only)		
	8.644-292.0	Vitaloxide® 5 Gal (US Only)		
	8.758-937.0	Vitaloxide® 5 Gal (Can Only)		
	8.639-558.0	Vitaloxide® Qty 4, 1 Gal (US Only)		
	8.639-560.0	Vitaloxide® Qty 6, 1 Qt (US Only)		
	8.639-559.0	Vitaloxide® Qty 4, 1 Gal (Can Only)		
-				

Included D Optional



AB 84 CUL

Enjoy the convenience that the AB 84 CUL offers in this easily transportable three speed air blower. Time is king in the cleaning industry. If you have wet hard floors or carpet, rely on the AB 84 CUL to dry your facility faster so you can resume to business-as-usual sooner. This unit features transport wheels and an upright handle for easy transport from job to job. The powerful 3,000 cfm air movement promotes rapid drying in no time.

- Upright handle and transport wheels for safety and convenience
- Three speeds of air movement for every type of job
- Maximum air movement of 3,000 cfm for rapid drying of carpeted and hard floors
- Sturdy four point motor mount to withstand heavy use and rough handling
- Built-in carpet clip for flood restoration jobs



AB 84 CUL

CHNICAL SPECIFICATIONS				
Air flow rate - level 1, 2, 3 cfm	3000 / 2500 / 2000			
Fan speed - level 1, 2, 3 rpm	1600 / 1350 / 1050			
Power cord length ft	25			
Motor rating hp	0.5			
Voltage V	115			
Weight Ibs	39			
Dimensions (LxWxH) in	22.8 x 16 x 21.5			

PART NO. DESCRIPTION

1.004-053.0

AB 84 CUL, three-speed commercial air blower with upright handle



SG BP GUM REMOVER

The Kärcher SG1 C Bp is a portable gum remover. Powered by a single lithium ion battery, this gum remover is quiet and offers up to 4 hours of uninterrupted operation. It removes gum in 4-6 seconds and is safe to use on stone, concrete and even carpet. Great for maintaining shopping malls, schools, train stations, airports, hotels, hospitals, restaurants and supermarkets.

- Low pressure fuel canisters are designed to ensure delivery of proper fuel volume and safe operation
- No cords ensures safety and convenience
- No harsh residue–safe on all surfaces



TECHNICAL SPECIFICATIONS		
Run time	hrs	4
Weight	lbs	11
Dimensions (LxWxH)	in	4.5 x 13 x 20.5

901 C PD

PAF	RT NO.	DESCRIPTION		
1.013-104.0		SG1 C Bp, backpack gum remover		
ACC	ESSORIES			
	PART NO.	DESCRIPTION		
	8.639-871.0	Service pack: 2 LPG cartridges, 4 bottles of solution and 2 black stainless steel brushes, 1 green brush. Expect 8-9 hours run time.		
	8.642-880.0	Brush hard black 2 pack replacement stainless steel brushes		
	8.640-136.0	Polypropylene brushes: 2 pack polypropylene brushes (green), for carpet and material		
	8.638-579.0	12-Pack of gas bottles		
	8.638-580.0	24 liters of gum remover solution		
	8.639-828.0	Charger		
	8.641-465.0	Battery		

WVP 10 WINDOW VAC

Achieve streak-free cleaning results with the lightweight and handheld machines in every position, even overhead if necessary – what's more you can get right up to the edges thanks to the manually adjustable holder.

Cordless for easy operation and storage.

6.7 ounce dirty water tank that's easy to empty and can be cleaned in the dishwasher.

PART NO. DESCRIPTION 1.633-551.0 WVP 10, includes battery, cleaning solution, battery charger, spray bottle and micro fiber cloth

ACCESSORIES PART NO. DESCRIPTION 2.633-123.0 WVP replacement battery 2.633-005.0 WVP replacement sugeegee blades - 280mm (2) 9.013-530.3 280mm complete nozzle 6.654-353.0 Wall charger 4.633-153.0 WVP spray bottle set with indoor pad 2.633-130.0 WVP microfiber pad for indoor use 2.633-131.0 WVP microfiber pad for outdoor use □ 2.633-144.0 WVP extension pole 2.633-104.0 Replacement squeegee blades 170mm □ 9.013-535.3 170mm complete nozzle





AT HOTSY WE MAKE THE BEST PRESSURE WASHERS. They come with the best warranties in the industry and are backed with expert service, great parts and detergents made specifically for your cleaning needs. Hotsy delivers one of the most rugged and durable lines of industrial pressure washers on the market. We are proud of our network of authorized Hotsy dealers throughout North America who will help you select the best equipment and accessories for your cleaning job. Our dealers provide on-site cleaning evaluations and next day service calls by factory certified technicians. Excellent warranties, superior performance and ETL safety certified. Buy a Hotsy and you'll have peace of mind knowing you have a product built to last.



Prices effective January 1, 2021 HOT_PriceList_2021 Rev. 01/21 © 2021 Kärcher North America NOTE: We are constantly improving and updating our products. Consequently, pictures, features & specifications in this brochure may differ from current models. Flow rates & pressure ratings may vary due to variances allowed by manufacturers of our machine components. We meet the CETA testing specs for machine performance at \pm 10% and in some cases are tighter within \pm 5% of listed specifications.